


Blueprint Accelerator: Azure SignalR Quickstart

Architecture

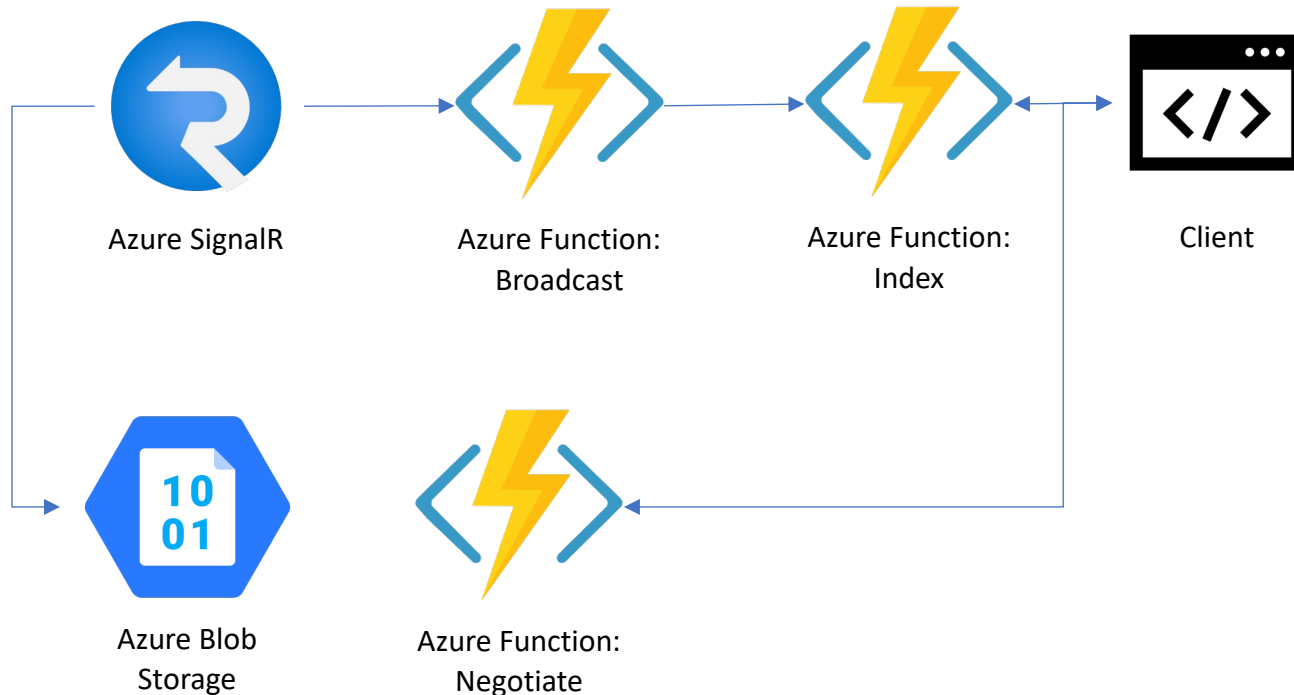

Components

- [Azure Blob Storage](#): Stores large amounts of unstructured data, such as text or binary data, that can be accessed from anywhere in the world via HTTP or HTTPS. You can use Blob storage to expose data publicly to the world, or to store application data privately.
- [Azure Functions](#) is a serverless compute option. It uses an event-driven model, where a piece of code (*a function*) is invoked by a trigger.
- [Azure SignalR Service](#) provides asynchronous communication between the client and the server. It supports any scenario that requires pushing data from server to client in real time.