



NebulaGraph

Nebula Graph Database Manual

v3.0.0

Min Wu, Yao Zhou, Cooper Liang, Foesa Yang, Max Zhu, Abby Huang

2022 Vesoft Inc.

Table of contents

1. Welcome to Nebula Graph 3.0.0 Documentation	7
1.1 Getting started	7
1.2 Other Sources	7
1.3 Symbols used in this manual	7
1.4 Modify errors	8
2. Introduction	9
2.1 What is Nebula Graph	9
2.2 Data modeling	13
2.3 Path types	15
2.4 VID	17
2.5 Nebula Graph architecture	19
3. Quick start	32
3.1 Quick start workflow	32
3.2 Step 1: Install Nebula Graph	33
3.3 Step 2: Manage Nebula Graph Service	36
3.4 Step 3: Connect to Nebula Graph	40
3.5 Step 4: Use nGQL (CRUD)	43
3.6 nGQL cheatsheet	53
4. nGQL guide	77
4.1 nGQL overview	77
4.2 Data types	93
4.3 Variables and composite queries	112
4.4 Operators	117
4.5 Functions and expressions	130
4.6 General queries statements	157
4.7 Clauses and options	197
4.8 Space statements	226
4.9 Tag statements	233
4.10 Edge type statements	241
4.11 Vertex statements	247
4.12 Edge statements	254
4.13 Native index statements	261
4.14 Full-text index statements	272
4.15 Subgraph and path	281
4.16 Query tuning statements	288

4.17 Operation and maintenance statements	291
5. Deployment and installation	296
5.1 Prepare resources for compiling, installing, and running Nebula Graph	296
5.2 Compile and install Nebula Graph	303
5.3 Standalone Nebula Graph	321
5.4 Deploy license	323
5.5 Manage Nebula Graph Service	325
5.6 Connect to Nebula Graph	329
5.7 Manage Storage hosts	332
5.8 Upgrade	333
5.9 Uninstall Nebula Graph	338
6. Configurations and logs	340
6.1 Configurations	340
6.2 Log management	357
7. Monitor and metrics	359
7.1 Query Nebula Graph metrics	359
7.2 RocksDB statistics	361
8. Data security	363
8.1 Authentication and authorization	363
8.2 Backup & Restore	372
8.3 Backup and restore data with snapshots	380
8.4 SSL encryption	382
9. Practices	384
9.1 Compaction	384
9.2 Storage load balance	386
9.3 Graph data modeling suggestions	387
9.4 System design suggestions	390
9.5 Execution plan	391
9.6 Processing super vertices	392
9.7 Best practices	394
10. Client	395
10.1 Clients overview	395
10.2 Nebula Console	396
10.3 Nebula CPP	399
10.4 Nebula Java	401
10.5 Nebula Python	403
10.6 Nebula Go	404

11. Nebula Graph Studio	405
11.1 Change Log	405
11.2 About Nebula Graph Studio	406
11.3 Deploy and connect	413
11.4 Quick start	427
11.5 Operation guide	437
11.6 Troubleshooting	466
12. Nebula Dashboard Community Edition	469
12.1 What is Nebula Dashboard Community Edition	469
12.2 Deploy Dashboard	471
12.3 Connect Dashboard	475
12.4 Dashboard	478
12.5 Metrics	482
13. Nebula Dashboard Enterprise Edition	486
13.1 What is Nebula Dashboard Enterprise Edition	486
13.2 Deploy Dashboard	488
13.3 Create and import clusters	492
13.4 Cluster management	499
13.5 Authority management	513
13.6 Global settings	516
13.7 Task Center	518
13.8 Metrics	519
13.9 FAQ	523
14. Nebula Explorer	524
14.1 What is Nebula Explorer	524
14.2 Deploy and connect	525
14.3 Page overview	531
14.4 Start querying	534
14.5 Vertex Filter	537
14.6 Graph exploration	538
14.7 Canvas	540
14.8 Explorer console	546
14.9 Basic operations and shortcuts	547
15. Nebula Importer	548
15.1 Nebula Importer	548
15.2 Configuration with Header	555
15.3 Configuration without Header	558

16. Nebula Exchange	561
16.1 Introduction	561
16.2 Get Exchange	566
16.3 Exchange configurations	568
16.4 Use Nebula Exchange	581
16.5 Exchange FAQ	656
17. Nebula Algorithm	659
17.1 Version compatibility	659
17.2 Prerequisites	659
17.3 Limitations	660
17.4 Supported algorithms	661
17.5 Implementation methods	661
17.6 Get Nebula Algorithm	661
17.7 How to use	662
18. Nebula Analytics	666
18.1 Scenarios	666
18.2 Limitations	666
18.3 Version compatibility	666
18.4 Graph algorithms	667
18.5 Install Nebula Analytics	667
18.6 How to use Nebula Analytics	668
19. Nebula Spark Connector	672
19.1 Use cases	672
19.2 Benefits	672
19.3 Release note	672
19.4 Get Nebula Spark Connector	673
19.5 How to use	673
20. Nebula Flink Connector	678
20.1 Use cases	678
20.2 Release note	678
21. Nebula Bench	679
21.1 Scenario	679
21.2 Release note	679
21.3 Test process	679
22. Appendix	680
22.1 Nebula Graph learning path	680
22.2 Nebula Graph 3.0.0 release notes	686
22.3 FAQ	689

22.4 Ecosystem tools overview	697
22.5 Import tools	700
22.6 How to Contribute	701

1. Welcome to Nebula Graph 3.0.0 Documentation

Check the manual version

This manual is revised on 2022-2-16, with [GitHub commit 6880a1280](#).

Nebula Graph is a distributed, scalable, and lightning-fast graph database. It is the optimal solution in the world capable of hosting graphs with dozens of billions of vertices (nodes) and trillions of edges (relationships) with millisecond latency.

1.1 Getting started

- [Learning path](#)
- [What is Nebula Graph](#)
- [Quick start workflow](#)
- [Configuration](#)
- [nGQL cheatsheet](#)
- [FAQ](#)
- [Ecosystem Tools](#)

1.2 Other Sources

- [Nebula Graph Homepage](#)
- [Release note](#)
- [Forum](#)
- [Blog](#)
- [Video](#)
- [Chinese Docs](#)

1.3 Symbols used in this manual

Note

Additional information or operation-related notes.

Caution

Cautions that need strict observation. If not, systematic breakdown, data loss, and security issues may happen.

Danger

Operations that may cause danger. If not observed, systematic breakdown, data loss, and security issues will happen.

Performance

Operations that merit attention as for performance enhancement.

Faq

Common questions.

Compatibility

The compatibility between nGQL and openCypher, or between the current version of nGQL and its prior ones.

Enterpriseonly

Differences between the Nebula Graph Open Source and Enterprise editions.

1.4 Modify errors


This Nebula Graph manual is written in the Markdown language. Users can click the pencil sign on the upper right side of each document title and modify errors.

Last update: January 17, 2022

2. Introduction


2.1 What is Nebula Graph

Nebula Graph is an open-source, distributed, easily scalable, and native graph database. It is capable of hosting graphs with hundreds of billions of vertices and trillions of edges, and serving queries with millisecond-latency.

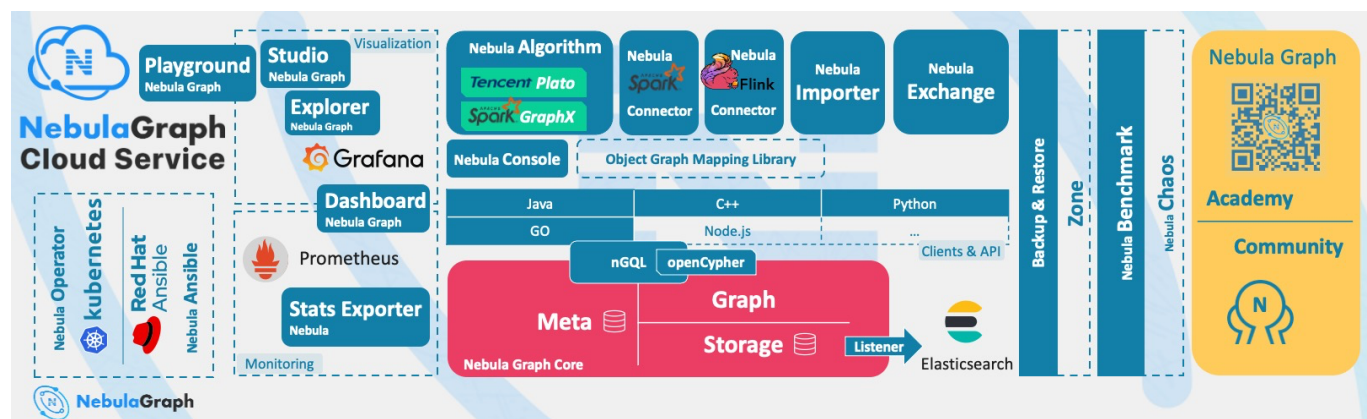

2.1.1 What is a graph database

A graph database, such as Nebula Graph, is a database that specializes in storing vast graph networks and retrieving information from them. It efficiently stores data as vertices (nodes) and edges (relationships) in labeled property graphs. Properties can be attached to both vertices and edges. Each vertex can have one or multiple tags (labels).

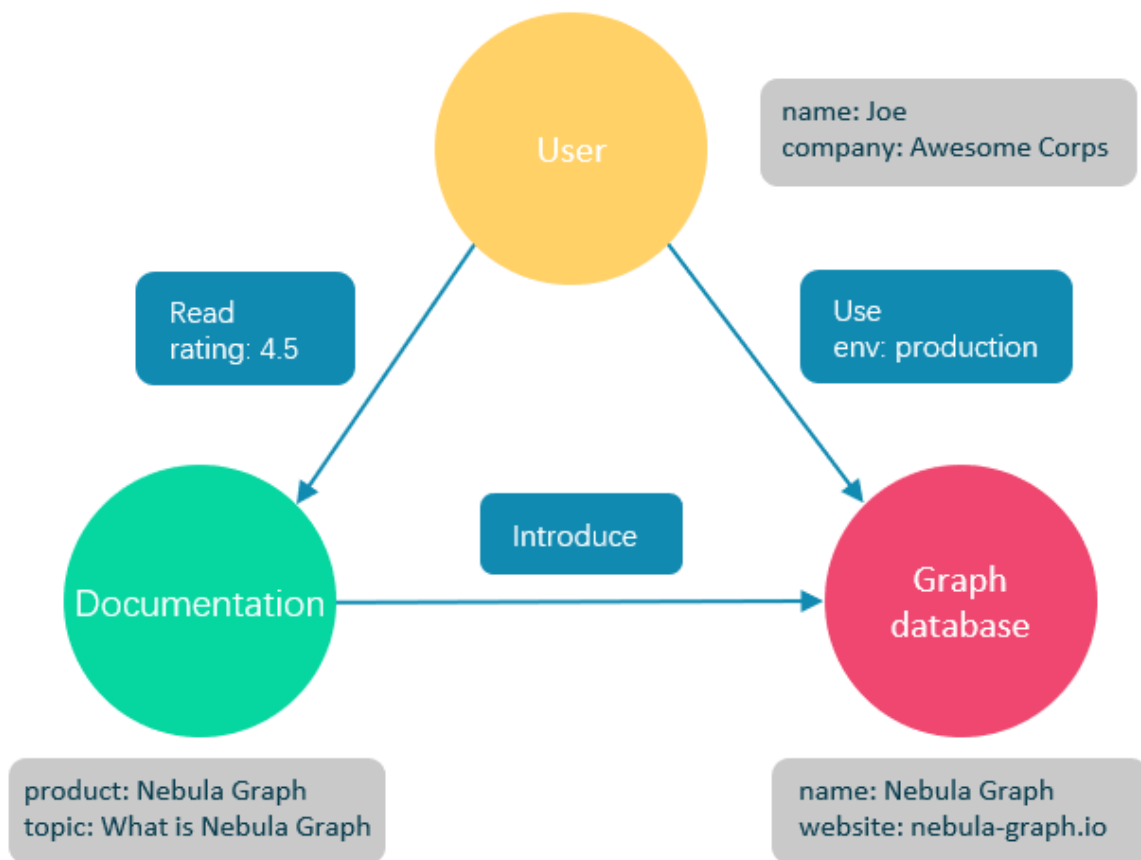

Graph databases are well suited for storing most kinds of data models abstracted from reality. Things are connected in almost all fields in the world. Modeling systems like relational databases extract the relationships between entities and squeeze them into table columns alone, with their types and properties stored in other columns or even other tables. This makes the data management time-consuming and cost-ineffective.

Nebula Graph, as a typical native graph database, allows you to store the rich relationships as edges with edge types and properties directly attached to them.

2.1.2 Advantages of Nebula Graph

Open-source

Nebula Graph is open under the Apache 2.0. More and more people such as database developers, data scientists, security experts, and algorithm engineers are participating in the designing and development of Nebula Graph. To join the opening of source code and ideas, surf the [Nebula Graph GitHub page](#).

Outstanding performance

Written in C++ and born for graph, Nebula Graph handles graph queries in milliseconds. Among most databases, Nebula Graph shows superior performance in providing graph data services. The larger the data size, the greater the superiority of Nebula Graph. For more information, see [Nebula Graph benchmarking](#).

High scalability

Nebula Graph is designed in a shared-nothing architecture and supports scaling in and out without interrupting the database service.

Developer friendly

Nebula Graph supports clients in popular programming languages like Java, Python, C++, and Go, and more are being developed. For more information, see Nebula Graph [clients](#).

Reliable access control

Nebula Graph supports strict role-based access control and external authentication servers such as LDAP (Lightweight Directory Access Protocol) servers to enhance data security. For more information, see [Authentication and authorization](#).

Diversified ecosystem

More and more native tools of Nebula Graph have been released, such as [Nebula Graph Studio](#), [Nebula Console](#), and [Nebula Exchange](#). For more ecosystem tools, see [Ecosystem tools overview](#).

Besides, Nebula Graph has the ability to be integrated with many cutting-edge technologies, such as Spark, Flink, and HBase, for the purpose of mutual strengthening in a world of increasing challenges and chances.

OpenCypher-compatible query language

The native Nebula Graph Query Language, also known as nGQL, is a declarative, openCypher-compatible textual query language. It is easy to understand and easy to use. For more information, see [nGQL guide](#).

Future-oriented hardware with balanced reading and writing

Solid-state drives have extremely high performance and [they are getting cheaper](#). Nebula Graph is a product based on SSD. Compared with products based on HDD and large memory, it is more suitable for future hardware trends and easier to achieve balanced reading and writing.

Easy data modeling and high flexibility

You can easily model the connected data into Nebula Graph for your business without forcing them into a structure such as a relational table, and properties can be added, updated, and deleted freely. For more information, see [Data modeling](#).

High popularity

Nebula Graph is being used by tech leaders such as Tencent, Vivo, Meituan, and JD Digits. For more information, visit the [Nebula Graph official website](#).

2.1.3 Use cases

Nebula Graph can be used to support various graph-based scenarios. To spare the time spent on pushing the kinds of data mentioned in this section into relational databases and on bothering with join queries, use Nebula Graph.

Fraud detection

Financial institutions have to traverse countless transactions to piece together potential crimes and understand how combinations of transactions and devices might be related to a single fraud scheme. This kind of scenario can be modeled in graphs, and with the help of Nebula Graph, fraud rings and other sophisticated scams can be easily detected.

Real-time recommendation

Nebula Graph offers the ability to instantly process the real-time information produced by a visitor and make accurate recommendations on articles, videos, products, and services.

Intelligent question-answer system

Natural languages can be transformed into knowledge graphs and stored in Nebula Graph. A question organized in a natural language can be resolved by a semantic parser in an intelligent question-answer system and re-organized. Then, possible answers to the question can be retrieved from the knowledge graph and provided to the one who asked the question.

Social networking

Information on people and their relationships are typical graph data. Nebula Graph can easily handle the social networking information of billions of people and trillions of relationships, and provide lightning-fast queries for friend recommendations and job promotions in the case of massive concurrency.

2.1.4 Related links

- [Official website](#)
- [Docs](#)
- [Blog](#)
- [Forum](#)
- [GitHub](#)

Last update: January 14, 2022

2.2 Data modeling

A data model is a model that organizes data and specifies how they are related to one another. This topic describes the Nebula Graph data model and provides suggestions for data modeling with Nebula Graph.

2.2.1 Data structures

Nebula Graph data model uses six data structures to store data. They are graph spaces, vertices, edges, tags, edge types and properties.

- **Graph spaces:** Graph spaces are used to isolate data from different teams or programs. Data stored in different graph spaces are securely isolated. Storage replications, privileges, and partitions can be assigned.
- **Vertices:** Vertices are used to store entities.
- In Nebula Graph, vertices are identified with vertex identifiers (i.e. `VID`). The `VID` must be unique in the same graph space. `VID` should be `int64`, or `fixed_string(N)`.
- A vertex has zero to multiple tags.

Compatibility

In Nebula Graph 2.x a vertex must have at least one tag. And in Nebula Graph 3.0.0, a tag is not required for a vertex.

- **Edges:** Edges are used to connect vertices. An edge is a connection or behavior between two vertices.
- There can be multiple edges between two vertices.
- Edges are directed. `->` identifies the directions of edges. Edges can be traversed in either direction.
- An edge is identified uniquely with `<a source vertex, an edge type, a rank value, and a destination vertex>`. Edges have no EID.
- An edge must have one and only one edge type.
- The rank value is an immutable user-assigned 64-bit signed integer. It identifies the edges with the same edge type between two vertices. Edges are sorted by their rank values. The edge with the greatest rank value is listed first. The default rank value is zero.
- **Tags:** Tags are used to categorize vertices. Vertices that have the same tag share the same definition of properties.
- **Edge types:** Edge types are used to categorize edges. Edges that have the same edge type share the same definition of properties.
- **Properties:** Properties are key-value pairs. Both vertices and edges are containers for properties.

Note

Tags and Edge types are similar to "vertex tables" and "edge tables" in the relational databases.

2.2.2 Directed property graph

Nebula Graph stores data in directed property graphs. A directed property graph has a set of vertices connected by directed edges. Both vertices and edges can have properties. A directed property graph is represented as:

$$G = \langle V, E, P_V, P_E \rangle$$

- **V** is a set of vertices.
- **E** is a set of directed edges.
- **P_V** is the property of vertices.
- **P_E** is the property of edges.

The following table is an example of the structure of the basketball player dataset. We have two types of vertices, that is **player** and **team**, and two types of edges, that is **serve** and **follow**.

Element	Name	Property name (Data type)	Description
Tag	player	name (string) age (int)	Represents players in the team.
Tag	team	name (string)	Represents the teams.
Edge type	serve	start_year (int) end_year (int)	Represents actions taken by players in the team. An action links a player with a team, and the direction is from a player to a team.
Edge type	follow	degree (int)	Represents actions taken by players in the team. An action links a player with another player, and the direction is from one player to the other player.

Note

Nebula Graph supports only directed edges.

Compatibility

Nebula Graph 3.0.0 allows dangling edges. Therefore, when adding or deleting, you need to ensure the corresponding source vertex and destination vertex of an edge exist. For details, see [INSERT VERTEX](#), [DELETE VERTEX](#), [INSERT EDGE](#), and [DELETE EDGE](#).

The MERGE statement in openCypher is not supported.


Last update: January 14, 2022

2.3 Path types

In graph theory, a path in a graph is a finite or infinite sequence of edges which joins a sequence of vertices. Paths are fundamental concepts of graph theory.

Paths can be categorized into 3 types: `walk`, `trail`, and `path`. For more information, see [Wikipedia](#).

The following figure is an example for a brief introduction.

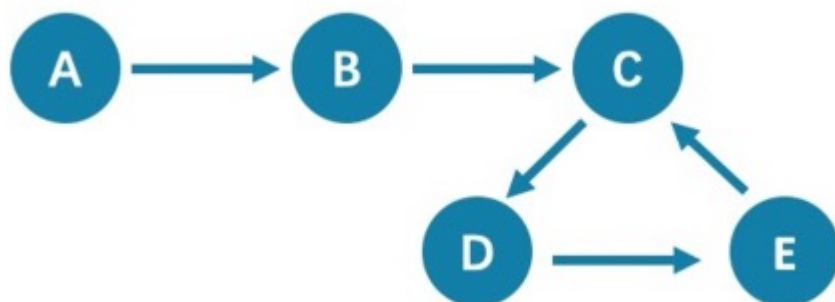

2.3.1 Walk

A `walk` is a finite or infinite sequence of edges. Both vertices and edges can be repeatedly visited in graph traversal.

In the above figure C, D, and E form a cycle. So, this figure contains infinite paths, such as `A->B->C->D->E`, `A->B->C->D->E->C`, and `A->B->C->D->E->C->D`.

Note

`GO` statements use `walk`.

2.3.2 Trail


A `trail` is a finite sequence of edges. Only vertices can be repeatedly visited in graph traversal. The Seven Bridges of Königsberg is a typical `trail`.

In the above figure, edges cannot be repeatedly visited. So, this figure contains finite paths. The longest path in this figure consists of 5 edges: `A->B->C->D->E->C`.

Note

`MATCH`, `FIND PATH`, and `GET SUBGRAPH` statements use `trail`.

There are two special cases of trail, `cycle` and `circuit`. The following figure is an example for a brief introduction.

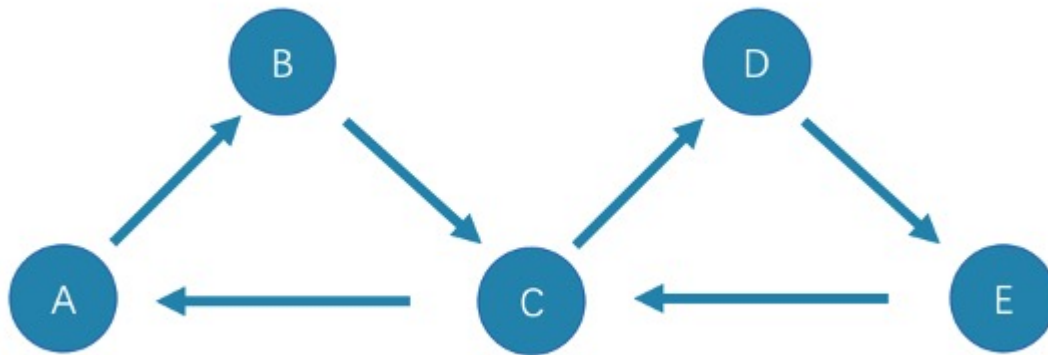

- cycle

A **cycle** refers to a closed **trail**. Only the terminal vertices can be repeatedly visited. The longest path in this figure consists of 3 edges: $A \rightarrow B \rightarrow C \rightarrow A$ or $C \rightarrow D \rightarrow E \rightarrow C$.

- circuit

A **circuit** refers to a closed **trail**. Edges cannot be repeatedly visited in graph traversal. Apart from the terminal vertices, other vertices can also be repeatedly visited. The longest path in this figure: $A \rightarrow B \rightarrow C \rightarrow D \rightarrow E \rightarrow C \rightarrow A$.

2.3.3 Path

A **path** is a finite sequence of edges. Neither vertices nor edges can be repeatedly visited in graph traversal.

So, the above figure contains finite paths. The longest path in this figure consists of 4 edges: $A \rightarrow B \rightarrow C \rightarrow D \rightarrow E$.

Last update: January 14, 2022

2.4 VID

In Nebula Graph, a vertex is uniquely identified by its ID, which is called a VID or a Vertex ID.

2.4.1 Features

- The data types of VIDs are restricted to `FIXED_STRING(<N>)` or `INT64`. One graph space can only select one VID type.
- A VID in a graph space is unique. It functions just as a primary key in a relational database. VIDs in different graph spaces are independent.
- The VID generation method must be set by users, because Nebula Graph does not provide auto increasing ID, or UUID.
- Vertices with the same VID will be identified as the same one. For example:
- A VID is the unique identifier of an entity, like a person's ID card number. A tag means the type of an entity, such as driver, and boss. Different tags define two groups of different properties, such as driving license number, driving age, order amount, order taking alt, and job number, payroll, debt ceiling, business phone number.
- When two `INSERT` statements (neither uses a parameter of `IF NOT EXISTS`) with the same VID and tag are operated at the same time, the latter `INSERT` will overwrite the former.
- When two `INSERT` statements with the same VID but different tags, like `TAG A` and `TAG B`, are operated at the same time, the operation of `Tag A` will not affect `Tag B`.
- VIDs will usually be indexed and stored into memory (in the way of LSM-tree). Thus, direct access to VIDs enjoys peak performance.

2.4.2 VID Operation

- Nebula Graph 1.x only supports `INT64` while Nebula Graph 2.x supports `INT64` and `FIXED_STRING(<N>)`. In `CREATE SPACE`, VID types can be set via `vid_type`.
- `id()` function can be used to specify or locate a VID.
- `LOOKUP` or `MATCH` statements can be used to find a VID via property index.
- Direct access to vertices statements via VIDs enjoys peak performance, such as `DELETE xxx WHERE id(xxx) == "player100" or GO FROM "player100"`. Finding VIDs via properties and then operating the graph will cause poor performance, such as `LOOKUP | GO FROM $.ids`, which will run both `LOOKUP` and `|` one more time.

2.4.3 VID Generation

VIDs can be generated via applications. Here are some tips:

- (Optimal) Directly take a unique primary key or property as a VID. Property access depends on the VID.
- Generate a VID via a unique combination of properties. Property access depends on property index.
- Generate a VID via algorithms like snowflake. Property access depends on property index.
- If short primary keys greatly outnumber long primary keys, do not enlarge the `N` of `FIXED_STRING(<N>)` too much. Otherwise, it will occupy a lot of memory and hard disks, and slow down performance. Generate VIDs via BASE64, MD5, hash by encoding and splicing.
- If you generate int64 VID via hash, the probability of collision is about 1/10 when there are 1 billion vertices. The number of edges has no concern with the probability of collision.

2.4.4 Define and modify the data type of VIDs

The data type of VIDs must be defined when you **create the graph space**. Once defined, it cannot be modified.

2.4.5 Query `start vid` and global scan

In most cases, the execution plan of query statements in Nebula Graph (`MATCH` , `GO` , and `LOOKUP`) must query the `start vid` in a certain way.

There are only two ways to locate `start vid`:

1. For example, `GO FROM "player100" OVER` explicitly indicates in the statement that `start vid` is "player100".
2. For example, `LOOKUP ON player WHERE player.name == "Tony Parker"` or `MATCH (v:player {name:"Tony Parker"})` locates `start vid` by the index of the property `player.name`.

Caution

For example, `match (n) return n;` returns an error: Scan vertices or edges need to specify a limit number, or limit number can not push down. , because it is a global scan, you must use the `LIMIT` clause to limit the number of returns.

Last update: January 14, 2022


2.5 Nebula Graph architecture

2.5.1 Architecture overview

Nebula Graph consists of three services: the Graph Service, the Storage Service, and the Meta Service. It applies the separation of storage and computing architecture.

Each service has its executable binaries and processes launched from the binaries. Users can deploy a Nebula Graph cluster on a single machine or multiple machines using these binaries.

The following figure shows the architecture of a typical Nebula Graph cluster.

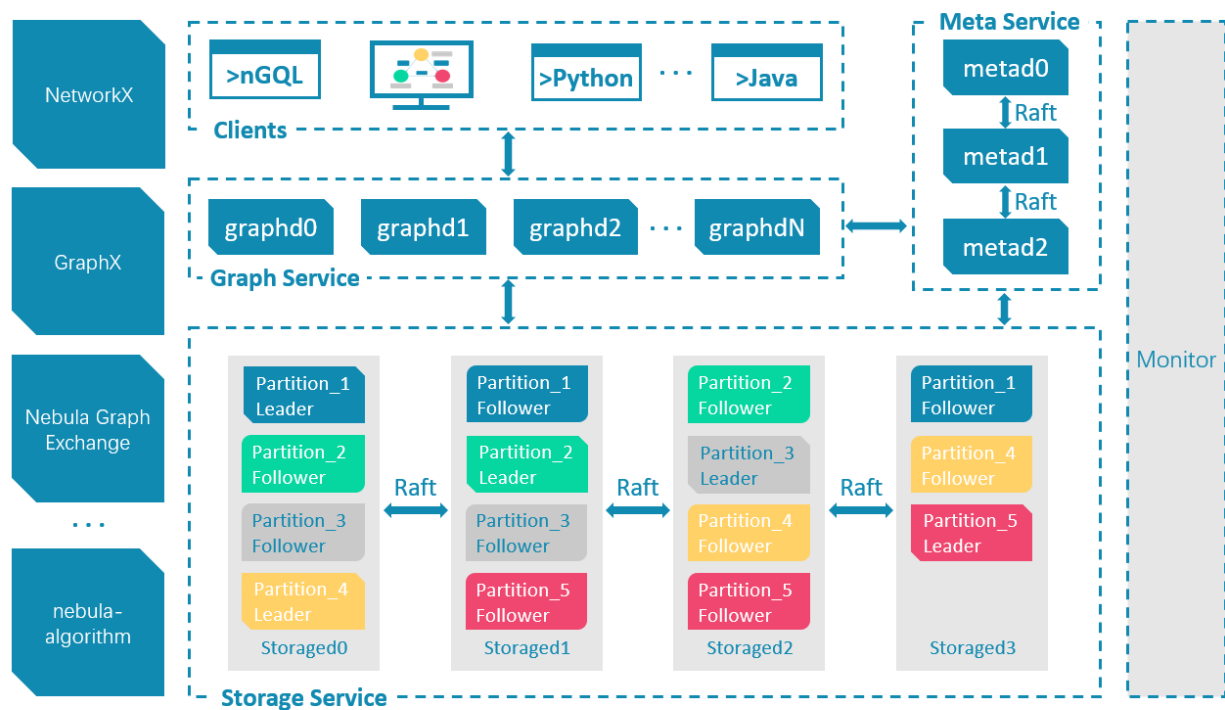

The Meta Service

The Meta Service in the Nebula Graph architecture is run by the `nebula-metad` processes. It is responsible for metadata management, such as schema operations, cluster administration, and user privilege management.

For details on the Meta Service, see [Meta Service](#).

The Graph Service and the Storage Service

Nebula Graph applies the separation of storage and computing architecture. The Graph Service is responsible for querying. The Storage Service is responsible for storage. They are run by different processes, i.e., `nebula-graphd` and `nebula-storaged`. The benefits of the separation of storage and computing architecture are as follows:

- Great scalability

The separated structure makes both the Graph Service and the Storage Service flexible and easy to scale in or out.

- High availability

If part of the Graph Service fails, the data stored by the Storage Service suffers no loss. And if the rest part of the Graph Service is still able to serve the clients, service recovery can be performed quickly, even unfelt by the users.

- Cost-effective

The separation of storage and computing architecture provides a higher resource utilization rate, and it enables clients to manage the cost flexibly according to business demands.

- Open to more possibilities

With the ability to run separately, the Graph Service may work with multiple types of storage engines, and the Storage Service may also serve more types of computing engines.

For details on the Graph Service and the Storage Service, see [Graph Service and Storage Service](#).


Last update: January 14, 2022

2.5.2 Meta Service

This topic introduces the architecture and functions of the Meta Service.

The architecture of the Meta Service

The architecture of the Meta Service is as follows:

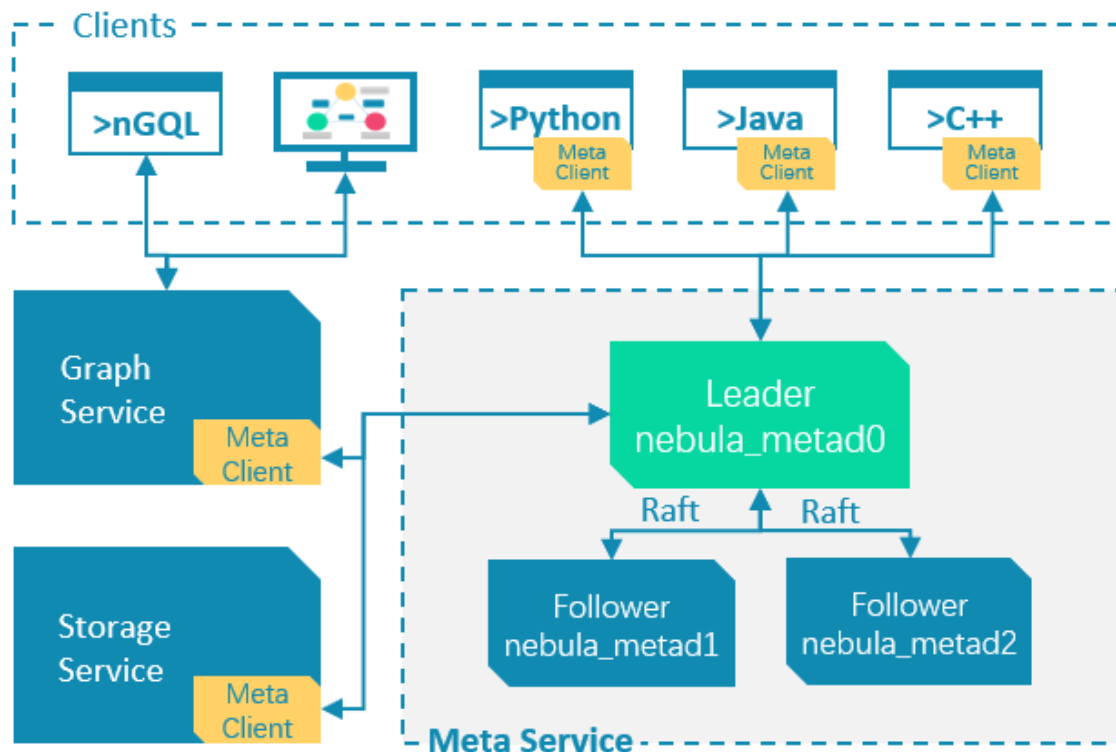

The Meta Service is run by nebula-metad processes. Users can deploy nebula-metad processes according to the scenario:

- In a test environment, users can deploy one or three nebula-metad processes on different machines or a single machine.
- In a production environment, we recommend that users deploy three nebula-metad processes on different machines for high availability.

All the nebula-metad processes form a Raft-based cluster, with one process as the leader and the others as the followers.

The leader is elected by the majorities and only the leader can provide service to the clients or other components of Nebula Graph. The followers will be run in a standby way and each has a data replication of the leader. Once the leader fails, one of the followers will be elected as the new leader.

Note

The data of the leader and the followers will keep consistent through Raft. Thus the breakdown and election of the leader will not cause data inconsistency. For more information on Raft, see [Storage service architecture](#).

Functions of the Meta Service

MANAGES USER ACCOUNTS

The Meta Service stores the information of user accounts and the privileges granted to the accounts. When the clients send queries to the Meta Service through an account, the Meta Service checks the account information and whether the account has the right privileges to execute the queries or not.

For more information on Nebula Graph access control, see [Authentication](#).

MANAGES PARTITIONS

The Meta Service stores and manages the locations of the storage partitions and helps balance the partitions.

MANAGES GRAPH SPACES

Nebula Graph supports multiple graph spaces. Data stored in different graph spaces are securely isolated. The Meta Service stores the metadata of all graph spaces and tracks the changes of them, such as adding or dropping a graph space.

MANAGES SCHEMA INFORMATION

Nebula Graph is a strong-typed graph database. Its schema contains tags (i.e., the vertex types), edge types, tag properties, and edge type properties.

The Meta Service stores the schema information. Besides, it performs the addition, modification, and deletion of the schema, and logs the versions of them.

For more information on Nebula Graph schema, see [Data model](#).

MANAGES TTL INFORMATION

The Meta Service stores the definition of TTL (Time to Live) options which are used to control data expiration. The Storage Service takes care of the expiring and evicting processes. For more information, see [TTL](#).

MANAGES JOBS


The Job Management module in the Meta Service is responsible for the creation, queuing, querying, and deletion of jobs.

Last update: January 14, 2022

2.5.3 Graph Service

The Graph Service is used to process the query. It has four submodules: Parser, Validator, Planner, and Executor. This topic will describe the Graph Service accordingly.

The architecture of the Graph Service

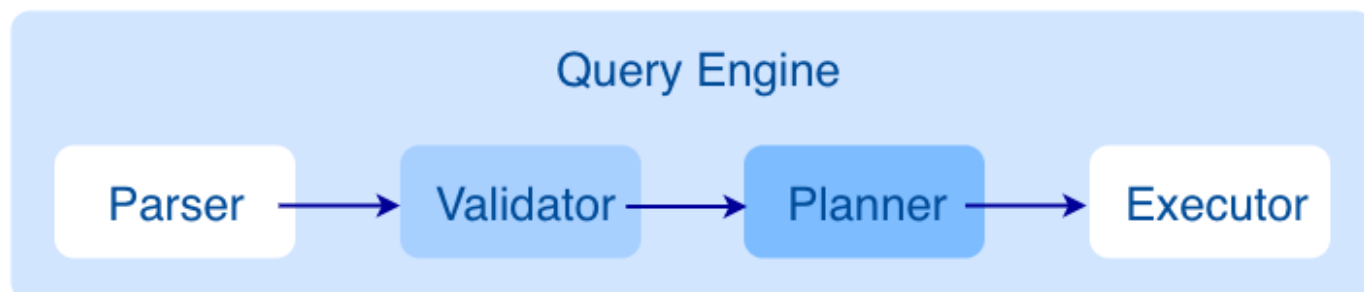


After a query is sent to the Graph Service, it will be processed by the following four submodules:

1. **Parser:** Performs lexical analysis and syntax analysis.
2. **Validator:** Validates the statements.
3. **Planner:** Generates and optimizes the execution plans.
4. **Executor:** Executes the operators.

Parser

After receiving a request, the statements will be parsed by Parser composed of Flex (lexical analysis tool) and Bison (syntax analysis tool), and its corresponding AST will be generated. Statements will be directly intercepted in this stage because of its invalid syntax.

For example, the structure of the AST of `GO FROM "Tim" OVER like WHERE properties(edge).likeness > 8.0 YIELD dst(edge)` is shown in the following figure.

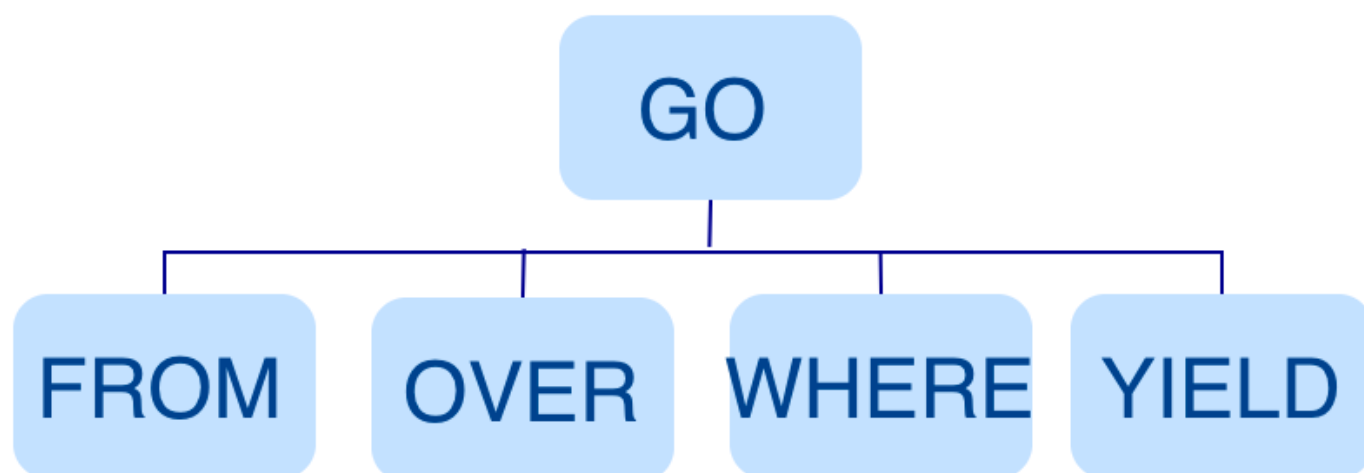

Validator

Validator performs a series of validations on the AST. It mainly works on these tasks:

- Validating metadata

Validator will validate whether the metadata is correct or not.

When parsing the `OVER`, `WHERE`, and `YIELD` clauses, Validator looks up the Schema and verifies whether the edge type and tag data exist or not. For an `INSERT` statement, Validator verifies whether the types of the inserted data are the same as the ones defined in the Schema.

- Validating contextual reference

Validator will verify whether the cited variable exists or not, or whether the cited property is variable or not.

For composite statements, like `$var = GO FROM "Tim" OVER like YIELD dst(edge) AS ID; GO FROM $var.ID OVER serve YIELD dst(edge)`, Validator verifies first to see if `var` is defined, and then to check if the `ID` property is attached to the `var` variable.

- Validating type inference

Validator infers what type the result of an expression is and verifies the type against the specified clause.

For example, the `WHERE` clause requires the result to be a `bool` value, a `NULL` value, or `empty`.

- Validating the information of `*`

Validator needs to verify all the Schema that involves `*` when verifying the clause if there is a `*` in the statement.

Take a statement like `GO FROM "Tim" OVER * YIELD dst(edge), properties(edge).likeness, dst(edge)` as an example. When verifying the `OVER` clause, Validator needs to verify all the edge types. If the edge type includes `like` and `serve`, the statement would be `GO FROM "Tim" OVER like,serve YIELD dst(edge), properties(edge).likeness, dst(edge)`.

- Validating input and output

Validator will check the consistency of the clauses before and after the `|`.


In the statement `GO FROM "Tim" OVER like YIELD dst(edge) AS ID | GO FROM $-.ID OVER serve YIELD dst(edge)`, Validator will verify whether `$-.ID` is defined in the clause before the `|`.

When the validation succeeds, an execution plan will be generated. Its data structure will be stored in the `src/planner` directory.

Planner

In the `nebula-graphd.conf` file, when `enable_optimizer` is set to be `false`, Planner will not optimize the execution plans generated by Validator. It will be executed by Executor directly.

In the `nebula-graphd.conf` file, when `enable_optimizer` is set to be `true`, Planner will optimize the execution plans generated by Validator. The structure is as follows.

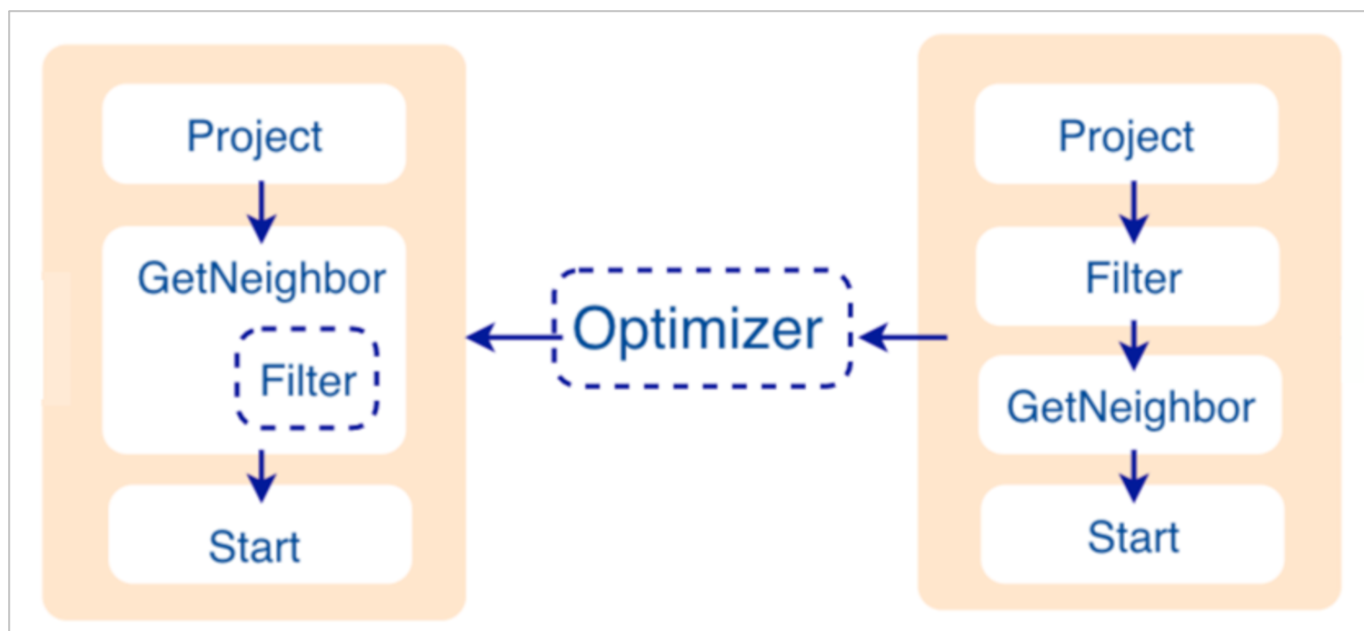

- Before optimization

In the execution plan on the right side of the preceding figure, each node directly depends on other nodes. For example, the root node `Project` depends on the `Filter` node, the `Filter` node depends on the `GetNeighbor` node, and so on, up to the leaf node `start`. Then the execution plan is (not truly) executed.

During this stage, every node has its input and output variables, which are stored in a hash table. The execution plan is not truly executed, so the value of each key in the associated hash table is empty (except for the `Start` node, where the input variables hold the starting data), and the hash table is defined in `src/context/ExecutionContext.cpp` under the `nebula-graph` repository.

For example, if the hash table is named as `ResultMap` when creating the `Filter` node, users can determine that the node takes data from `ResultMap["GN1"]`, then puts the result into `ResultMap["Filter2"]`, and so on. All these work as the input and output of each node.

- Process of optimization

The optimization rules that Planner has implemented so far are considered RBO (Rule-Based Optimization), namely the pre-defined optimization rules. The CBO (Cost-Based Optimization) feature is under development. The optimized code is in the `src/optimizer/` directory under the `nebula-graph` repository.

RBO is a “bottom-up” exploration process. For each rule, the root node of the execution plan (in this case, the `Project` node) is the entry point, and step by step along with the node dependencies, it reaches the node at the bottom to see if it matches the rule.


As shown in the preceding figure, when the `Filter` node is explored, it is found that its children node is `GetNeighbors`, which matches successfully with the pre-defined rules, so a transformation is initiated to integrate the `Filter` node into the `GetNeighbors` node, the `Filter` node is removed, and then the process continues to the next rule. Therefore, when the `GetNeighbor` operator calls interfaces of the Storage layer to get the neighboring edges of a vertex during the execution stage, the Storage layer will directly filter out the unqualified edges internally. Such optimization greatly reduces the amount of data transfer, which is commonly known as filter pushdown.

Note

Nebula Graph 3.0.0 will not run optimization by default.

Executor

The Executor module consists of Scheduler and Executor. The Scheduler generates the corresponding execution operators against the execution plan, starting from the leaf nodes and ending at the root node. The structure is as follows.

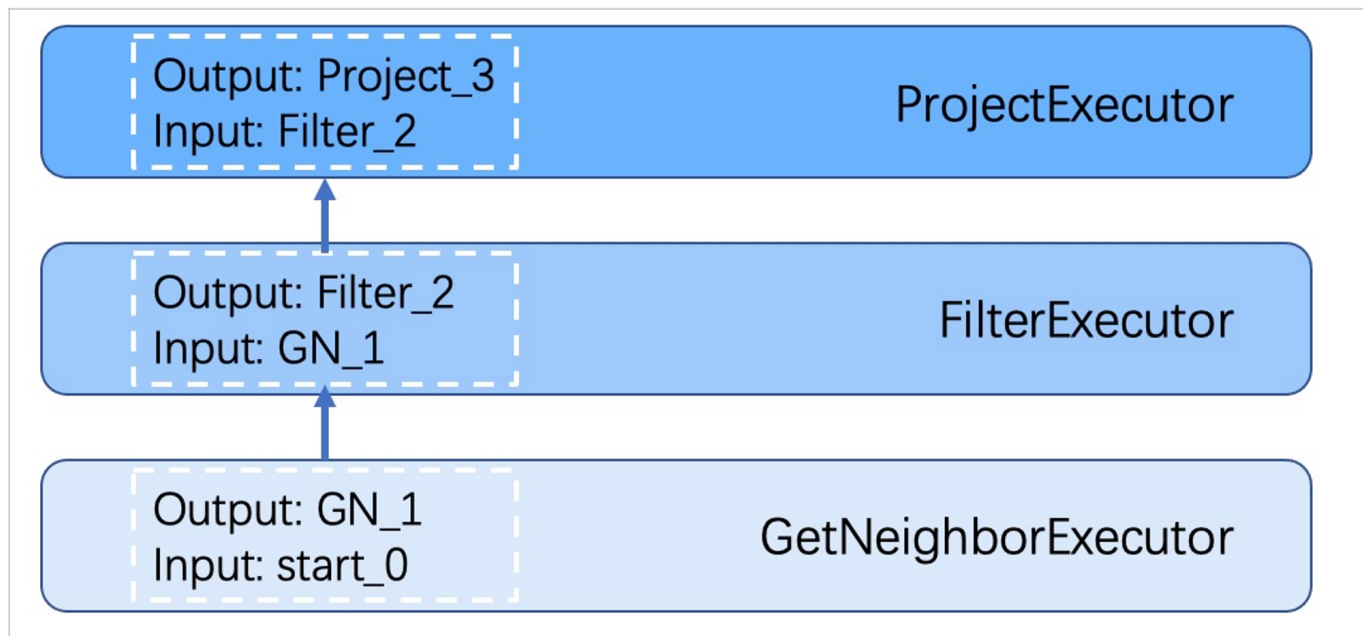

Each node of the execution plan has one execution operator node, whose input and output have been determined in the execution plan. Each operator only needs to get the values for the input variables, compute them, and finally put the results into the corresponding output variables. Therefore, it is only necessary to execute step by step from `start`, and the result of the last operator is returned to the user as the final result.

Source code hierarchy

The source code hierarchy under the nebula-graph repository is as follows.

```

|--src
|--context    //contexts for validation and execution
|--daemons
|--executor   //execution operators
|--mock
|--optimizer  //optimization rules
|--parser     //lexical analysis and syntax analysis
|--planner    //structure of the execution plans
|--scheduler  //scheduler
|--service
|--util       //basic components
|--validator  //validation of the statements
|--visitor
  
```

Last update: January 14, 2022

2.5.4 Storage Service


The persistent data of Nebula Graph have two parts. One is the [Meta Service](#) that stores the meta-related data.

The other is the Storage Service that stores the data, which is run by the nebula-storaged process. This topic will describe the architecture of the Storage Service.

Advantages

- High performance (Customized built-in KVStore)
- Great scalability (Shared-nothing architecture, not rely on NAS/SAN-like devices)
- Strong consistency (Raft)
- High availability (Raft)
- Supports synchronizing with the third party systems, such as [Elasticsearch](#).

The architecture of the Storage Service

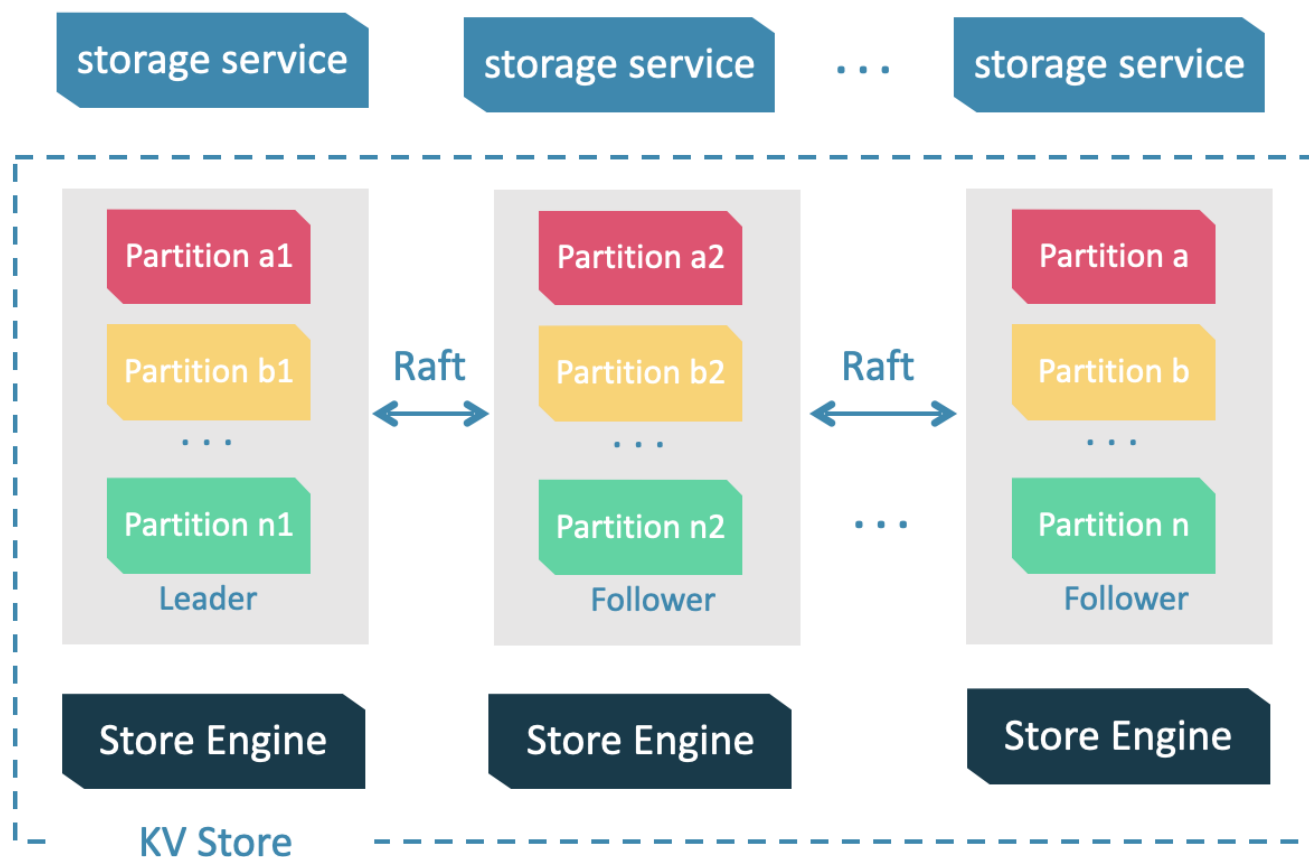

The Storage Service is run by the nebula-storaged process. Users can deploy nebula-storaged processes on different occasions. For example, users can deploy 1 nebula-storaged process in a test environment and deploy 3 nebula-storaged processes in a production environment.

All the nebula-storaged processes consist of a Raft-based cluster. There are three layers in the Storage Service:

- Storage interface

The top layer is the storage interface. It defines a set of APIs that are related to the graph concepts. These API requests will be translated into a set of KV operations targeting the corresponding **Partition**. For example:

- `getNeighbors` : queries the in-edge or out-edge of a set of vertices, returns the edges and the corresponding properties, and supports conditional filtering.
- `insert vertex/edge` : inserts a vertex or edge and its properties.
- `getProps` : gets the properties of a vertex or an edge.

It is this layer that makes the Storage Service a real graph storage. Otherwise, it is just a KV storage.

- Consensus

Below the storage interface is the consensus layer that implements **Multi Group Raft**, which ensures the strong consistency and high availability of the Storage Service.

- Store engine

The bottom layer is the local storage engine library, providing operations like `get`, `put`, and `scan` on local disks. The related interfaces are stored in `KVStore.h` and `KVEngine.h` files. You can develop your own local store plugins based on your needs.

The following will describe some features of the Storage Service based on the above architecture.

KVStore

Nebula Graph develops and customizes its built-in KVStore for the following reasons.

- It is a high-performance KVStore.
- It is provided as a (kv) library and can be easily developed for the filter pushdown purpose. As a strong-typed database, how to provide Schema during pushdown is the key to efficiency for Nebula Graph.
- It has strong data consistency.

Therefore, Nebula Graph develops its own KVStore with RocksDB as the local storage engine. The advantages are as follows.

- For multiple local hard disks, Nebula Graph can make full use of its concurrent capacities through deploying multiple data directories.
- The Meta Service manages all the Storage servers. All the partition distribution data and current machine status can be found in the meta service. Accordingly, users can execute a manual load balancing plan in meta service.

Note

Nebula Graph does not support auto load balancing because auto data transfer will affect online business.

- Nebula Graph provides its own WAL mode so one can customize the WAL. Each partition owns its WAL.
- One Nebula Graph KVStore cluster supports multiple graph spaces, and each graph space has its own partition number and replica copies. Different graph spaces are isolated physically from each other in the same cluster.


PROPERTY DESCRIPTIONS

Nebula Graph uses strong-typed Schema.

Nebula Graph will store the properties of vertex and edges in order after encoding them. Since the length of properties is fixed, queries can be made in no time according to offset. Before decoding, Nebula Graph needs to get (and cache) the schema information in the Meta Service. In addition, when encoding properties, Nebula Graph will add the corresponding schema version to support online schema change.

Data partitioning

Since in an ultra-large-scale relational network, vertices can be as many as tens to hundreds of billions, and edges are even more than trillions. Even if only vertices and edges are stored, the storage capacity of both exceeds that of ordinary servers. Therefore, Nebula Graph uses hash to shard the graph elements and store them in different partitions.

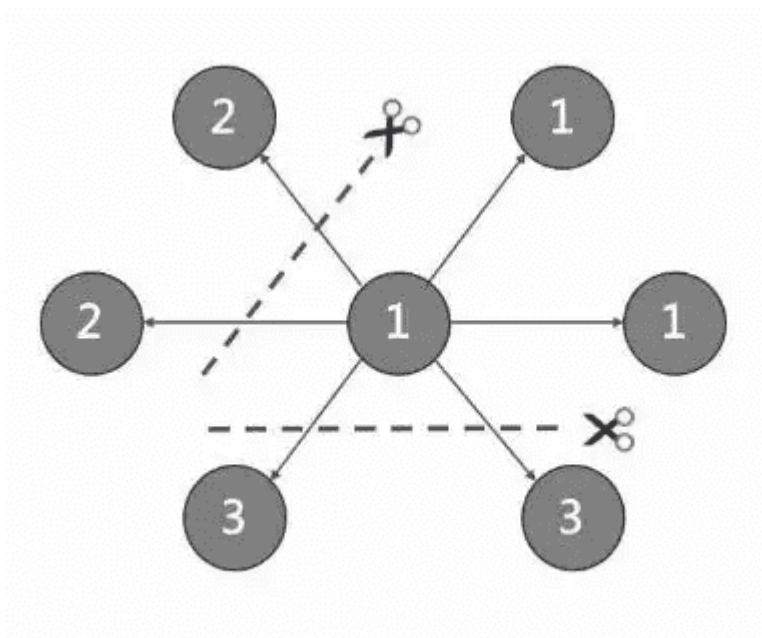

PARTITION ALGORITHM

Nebula Graph uses a **static Hash** strategy to shard data through a modulo operation on vertex ID. All the out-keys, in-keys, and tag data will be placed in the same partition. In this way, query efficiency is increased dramatically.

Note

The number of partitions needs to be determined when users are creating a graph space since it cannot be changed afterward. Users are supposed to take into consideration the demands of future business when setting it.

When inserting into Nebula Graph, vertices and edges are distributed across different partitions. And the partitions are located on different machines. The number of partitions is set in the CREATE SPACE statement and cannot be changed afterward.

If certain vertices need to be placed on the same partition (i.e., on the same machine), see [Formula/code](#).

The following code will briefly describe the relationship between VID and partition.

```
// If VertexID occupies 8 bytes, it will be stored in int64 to be compatible with the version 1.0.
uint64_t vid = 0;
if (id.size() == 8) {
    memcpy(static_cast<void*>(&vid), id.data(), 8);
} else {
    MurmurHash2 hash;
    vid = hash(id.data());
}
PartitionID pId = vid % numParts + 1;
```

Roughly speaking, after hashing a fixed string to int64, (the hashing of int64 is the number itself), do modulo, and then plus one, namely:

```
pId = vid % numParts + 1;
```

Parameters and descriptions of the preceding formula are as follows:

Parameter	Description
<code>%</code>	The modulo operation.
<code>numParts</code>	The number of partitions for the graph space where the <code>vid</code> is located, namely the value of <code>partition_num</code> in the <code>CREATE SPACE</code> statement.
<code>pId</code>	The ID for the partition where the <code>vid</code> is located.

Suppose there are 100 partitions, the vertices with `vid` 1, 101, and 1001 will be stored on the same partition. But, the mapping between the partition ID and the machine address is random. Therefore, we cannot assume that any two partitions are located on the same machine.

Raft

RAFT IMPLEMENTATION

In a distributed system, one data usually has multiple replicas so that the system can still run normally even if a few copies fail. It requires certain technical means to ensure consistency between replicas.

Basic principle: Raft is designed to ensure consistency between replicas. Raft uses election between replicas, and the (candidate) replica that wins more than half of the votes will become the Leader, providing external services on behalf of all replicas. The rest Followers will play backups. When the Leader fails (due to communication failure, operation and maintenance commands, etc.), the rest Followers will conduct a new round of elections and vote for a new Leader. The Leader and Followers will detect each other's survival through heartbeats and write them to the hard disk in Raft-wal mode. Replicas that do not respond to more than multiple heartbeats will be considered faulty.

Note

Raft-wal needs to be written into the hard disk periodically. If hard disk bottlenecks to write, Raft will fail to send a heartbeat and conduct a new round of elections. If the hard disk IO is severely blocked, there will be no Leader for a long time.

Read and write: For every writing request of the clients, the Leader will initiate a Raft-wal and synchronize it with the Followers. Only after over half replicas have received the Raft-wal will it return to the clients successfully. For every reading request of the clients, it will get to the Leader directly, while Followers will not be involved.

Failure: Scenario 1: Take a (space) cluster of a single replica as an example. If the system has only one replica, the Leader will be itself. If failure happens, the system will be completely unavailable. Scenario 2: Take a (space) cluster of three replicas as an example. If the system has three replicas, one of them will be the Leader and the rest will be the Followers. If the Leader fails, the rest two can still vote for a new Leader (and a Follower), and the system is still available. But if any of the two Followers fails again, the system will be completely unavailable due to inadequate voters.

Note

Raft and HDFS have different modes of duplication. Raft is based on a quorum vote, so the number of replicas cannot be even.

MULTI GROUP RAFT

The Storage Service supports a distributed cluster architecture, so Nebula Graph implements Multi Group Raft according to Raft protocol. Each Raft group stores all the replicas of each partition. One replica is the leader, while others are followers. In this way, Nebula Graph achieves strong consistency and high availability. The functions of Raft are as follows.

Nebula Graph uses Multi Group Raft to improve performance when there are many partitions because Raft-wal cannot be NULL. When there are too many partitions, costs will increase, such as storing information in Raft group, WAL files, or batch operation in low load.

There are two key points to implement the Multi Raft Group:

- To share transport layer

Each Raft Group sends messages to its corresponding peers. So if the transport layer cannot be shared, the connection costs will be very high.

- To share thread pool

Raft Groups share the same thread pool to prevent starting too many threads and a high context switch cost.

BATCH

For each partition, it is necessary to do a batch to improve throughput when writing the WAL serially. As Nebula Graph uses WAL to implement some special functions, batches need to be grouped, which is a feature of Nebula Graph.

For example, lock-free CAS operations will execute after all the previous WALs are committed. So for a batch, if there are several WALs in CAS type, we need to divide this batch into several smaller groups and make sure they are committed serially.

TRANSFER LEADERSHIP

Transfer leadership is extremely important for balance. When moving a partition from one machine to another, Nebula Graph first checks if the source is a leader. If so, it should be moved to another peer. After data migration is completed, it is important to **balance leader distribution** again.

When a transfer leadership command is committed, the leader will abandon its leadership and the followers will start a leader election.

PEER CHANGES

To avoid split-brain, when members in a Raft Group change, an intermediate state is required. In such a state, the quorum of the old group and new group always have an overlap. Thus it prevents the old or new group from making decisions unilaterally. To make it even simpler, in his doctoral thesis Diego Ongaro suggests adding or removing a peer once to ensure the overlap between the quorum of the new group and the old group. Nebula Graph also uses this approach, except that the way to add or remove a member is different. For details, please refer to `addPeer/removePeer` in the `Raft Part` class.

Differences with HDFS

The Storage Service is a Raft-based distributed architecture, which has certain differences with that of HDFS. For example:

- The Storage Service ensures consistency through Raft. Usually, the number of its replicas is odd to elect a leader. However, DataNode used by HDFS ensures consistency through NameNode, which has no limit on the number of replicas.
- In the Storage Service, only the replicas of the leader can read and write, while in HDFS all the replicas can do so.
- In the Storage Service, the number of replicas needs to be determined when creating a space, since it cannot be changed afterward. But in HDFS, the number of replicas can be changed freely.
- The Storage Service can access the file system directly. While the applications of HDFS (such as HBase) have to access HDFS before the file system, which requires more RPC times.

In a word, the Storage Service is more lightweight with some functions simplified and its architecture is simpler than HDFS, which can effectively improve the read and write performance of a smaller block of data.

Last update: February 10, 2022

3. Quick start

3.1 Quick start workflow

The quick start introduces the simplest workflow to use Nebula Graph, including deploying Nebula Graph, connecting to Nebula Graph, and doing basic CRUD.

3.1.1 Documents

Users can quickly deploy and use Nebula Graph in the following steps.

1. Deploy Nebula Graph

Users can use the RPM or DEB file to quickly deploy Nebula Graph. For other ways to deploy Nebula Graph and corresponding preparations, see [deployment and installation](#).

2. Start Nebula Graph

Users need to start Nebula Graph after deployment.

3. Connect to Nebula Graph

Then users can use clients to connect to Nebula Graph. Nebula Graph supports a variety of clients. This topic will describe how to use Nebula Console to connect to Nebula Graph.

4. CRUD in Nebula Graph

Users can use nGQL (Nebula Graph Query Language) to run CRUD after connecting to Nebula Graph.

Last update: January 14, 2022

3.2 Step 1: Install Nebula Graph

RPM and DEB are common package formats on Linux systems. This topic shows how to quickly install Nebula Graph with the RPM or DEB package.

3.2.1 Prerequisites

Prepare the right **resources**.

Note

The console is not compiled or packaged with Nebula Graph server binaries. You can install **nebula-console** by yourself.

Enterpriseonly

For the Enterprise Edition, please send email to inquiry@vesoft.com.

3.2.2 Download the package from cloud service

- Download the released version.

URL:

```
//Centos 6
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.el6.x86_64.rpm

//Centos 7
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.el7.x86_64.rpm

//Centos 8
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.el8.x86_64.rpm

//Ubuntu 1604
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.ubuntu1604.amd64.deb

//Ubuntu 1804
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.ubuntu1804.amd64.deb

//Ubuntu 2004
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.ubuntu2004.amd64.deb
```

For example, download the release package **3.0.0** for **Centos 7.5** :

```
wget https://oss-cdn.nebula-graph.io/package/3.0.0/nebula-graph-3.0.0.el7.x86_64.rpm
wget https://oss-cdn.nebula-graph.io/package/3.0.0/nebula-graph-3.0.0.el7.x86_64.rpm.sha256sum.txt
```

Download the release package **3.0.0** for **Ubuntu 1804** :

```
wget https://oss-cdn.nebula-graph.io/package/3.0.0/nebula-graph-3.0.0.ubuntu1804.amd64.deb
wget https://oss-cdn.nebula-graph.io/package/3.0.0/nebula-graph-3.0.0.ubuntu1804.amd64.deb.sha256sum.txt
```

- Download the nightly version.

Danger

- Nightly versions are usually used to test new features. Do not use it in a production environment.
- Nightly versions may not be built successfully every night. And the names may change from day to day.

URL:

```
//Centos 6
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.e16.x86_64.rpm

//Centos 7
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.e17.x86_64.rpm

//Centos 8
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.e18.x86_64.rpm

//Ubuntu 1604
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.ubuntu1604.amd64.deb

//Ubuntu 1804
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.ubuntu1804.amd64.deb

//Ubuntu 2004
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.ubuntu2004.amd64.deb
```

For example, download the `Centos 7.5` package developed and built in `2021.11.28` :

```
wget https://oss-cdn.nebula-graph.io/package/nightly/2021.11.28/nebula-graph-2021.11.28-nightly.e17.x86_64.rpm
wget https://oss-cdn.nebula-graph.io/package/nightly/2021.11.28/nebula-graph-2021.11.28-nightly.e17.x86_64.rpm.sha256sum.txt
```

For example, download the `Ubuntu 1804` package developed and built in `2021.11.28` :

```
wget https://oss-cdn.nebula-graph.io/package/nightly/2021.11.28/nebula-graph-2021.11.28-nightly.ubuntu1804.amd64.deb
wget https://oss-cdn.nebula-graph.io/package/nightly/2021.11.28/nebula-graph-2021.11.28-nightly.ubuntu1804.amd64.deb.sha256sum.txt
```

3.2.3 Install Nebula Graph

- Use the following syntax to install with an RPM package.

```
$ sudo rpm -ivh --prefix=<installation_path> <package_name>
```

For example, to install an RPM package in the default path for the 3.0.0 version.

```
sudo rpm -ivh nebula-graph-3.0.0.e17.x86_64.rpm
```

- Use the following syntax to install with a DEB package.

```
$ sudo dpkg -i --install=<installation_path> <package_name>
```

For example, to install a DEB package in the default path for the 3.0.0 version.

```
sudo dpkg -i nebula-graph-3.0.0.ubuntu1804.amd64.deb
```

Note

The default installation path is `/usr/local/nebula/`.

3.2.4 Next to do

- (Enterprise Edition)Deploy license
 - Start Nebula Graph
 - Connect to Nebula Graph
-

Last update: January 14, 2022

3.3 Step 2: Manage Nebula Graph Service

You can use the `nebula.service` script to start, stop, restart, terminate, and check the Nebula Graph services. This topic takes starting, stopping and checking the Nebula Graph services for examples.

`nebula.service` is stored in the `/usr/local/nebula/scripts` directory by default, which is also the default installation path of Nebula Graph. If you have customized the path, use the actual path in your environment.

3.3.1 Syntax

```
$ sudo /usr/local/nebula/scripts/nebula.service
[-v] [-c <config_file_path>]
<start|stop|restart|kill|status>
<metad|graphd|storaged|all>
```

Parameter	Description
<code>-v</code>	Display detailed debugging information.
<code>-c</code>	Specify the configuration file path. The default path is <code>/usr/local/nebula/etc/</code> .
<code>start</code>	Start the target services.
<code>stop</code>	Stop the target services.
<code>restart</code>	Restart the target services.
<code>kill</code>	Terminate the target services.
<code>status</code>	Check the status of the target services.
<code>metad</code>	Set the Meta Service as the target service.
<code>graphd</code>	Set the Graph Service as the target service.
<code>storaged</code>	Set the Storage Service as the target service.
<code>all</code>	Set all the Nebula Graph services as the target services.

3.3.2 Start Nebula Graph

In non-container environment

Run the following command to start Nebula Graph.

```
$ sudo /usr/local/nebula/scripts/nebula.service start all
[INFO] Starting nebula-metad...
[INFO] Done
[INFO] Starting nebula-graphd...
[INFO] Done
[INFO] Starting nebula-storaged...
[INFO] Done
```

In docker container (deployed with docker-compose)

Run the following command in the `nebula-docker-compose/` directory to start Nebula Graph.


```
[nebula-docker-compose]$ docker-compose up -d
Building with native build. Learn about native build in Compose here: https://docs.docker.com/go/compose-native-build/
Creating network "nebula-docker-compose_nebula-net" with the default driver
Creating nebula-docker-compose_metad0_1 ... done
Creating nebula-docker-compose_metad2_1 ... done
Creating nebula-docker-compose_metad1_1 ... done
Creating nebula-docker-compose_storaged2_1 ... done
Creating nebula-docker-compose_graphd1_1 ... done
Creating nebula-docker-compose_storaged1_1 ... done
Creating nebula-docker-compose_storaged0_1 ... done
Creating nebula-docker-compose_graphd2_1 ... done
Creating nebula-docker-compose_graphd1 ... done
```

3.3.3 Stop Nebula Graph

Danger

Do not run `kill -9` to forcibly terminate the processes. Otherwise, there is a low probability of data loss.

In non-container environment

Run the following command to stop Nebula Graph.

```
$ sudo /usr/local/nebula/scripts/nebula.service stop all
[INFO] Stopping nebula-metad...
[INFO] Done
[INFO] Stopping nebula-graphd...
[INFO] Done
[INFO] Stopping nebula-storaged...
[INFO] Done
```

In docker container (deployed with docker-compose)

Run the following command in the `nebula-docker-compose/` directory to stop Nebula Graph.

```
nebula-docker-compose]$ docker-compose down
Stopping nebula-docker-compose_graphd1_1 ... done
Stopping nebula-docker-compose_graphd2_1 ... done
Stopping nebula-docker-compose_storaged0_1 ... done
Stopping nebula-docker-compose_storaged1_1 ... done
Stopping nebula-docker-compose_graphd1_1 ... done
Stopping nebula-docker-compose_storaged2_1 ... done
Stopping nebula-docker-compose_metad1_1 ... done
Stopping nebula-docker-compose_metad2_1 ... done
Stopping nebula-docker-compose_metad0_1 ... done
Removing nebula-docker-compose_graphd1_1 ... done
Removing nebula-docker-compose_graphd2_1 ... done
Removing nebula-docker-compose_storaged0_1 ... done
Removing nebula-docker-compose_storaged1_1 ... done
Removing nebula-docker-compose_graphd1_1 ... done
Removing nebula-docker-compose_storaged2_1 ... done
Removing nebula-docker-compose_metad1_1 ... done
Removing nebula-docker-compose_metad2_1 ... done
Removing nebula-docker-compose_metad0_1 ... done
Removing network nebula-docker-compose_nebula-net
```

Note

If you are using a developing or nightly version for testing and have compatibility issues, try to run `docker-compose down -v` to **DELETE** all data stored in Nebula Graph and import data again.

3.3.4 Check the service status

In non-container environment

Run the following command to check the service status of Nebula Graph.

```
$ sudo /usr/local/nebula/scripts/nebula.service status all
```

- Nebula Graph is running normally if the following information is returned.

```
[INFO] nebula-metad(de03025): Running as 26601, Listening on 9559
[INFO] nebula-graphd(de03025): Running as 26644, Listening on 9669
[INFO] nebula-storaged(de03025): Running as 26709, Listening on 9779
```

- If the returned result is similar to the following one, there is a problem. You may also go to the [Nebula Graph community](#) for help.

```
[INFO] nebula-metad: Running as 25600, Listening on 9559
[INFO] nebula-graphd: Exited
[INFO] nebula-storaged: Running as 25646, Listening on 9779
```

The Nebula Graph services consist of the Meta Service, Graph Service, and Storage Service. The configuration files for all three services are stored in the `/usr/local/nebula/etc/` directory by default. You can check the configuration files according to the returned result to troubleshoot problems.

In docker container (deployed with docker-compose)

Run the following command in the `nebula-docker-compose/` directory to check the service status of Nebula Graph.

nebula-docker-compose]\$ docker-compose ps				
Name	Command	State	Ports	
nebula-docker-compose_graphd1_1	/usr/local/nebula/bin/nebu ...	Up (healthy)	0.0.0.0:49223->19669/tcp, 0.0.0.0:49222->19670/tcp, 0.0.0.0:49224->9669/tcp	
nebula-docker-compose_graphd2_1	/usr/local/nebula/bin/nebu ...	Up (healthy)	0.0.0.0:49229->19669/tcp, 0.0.0.0:49228->19670/tcp, 0.0.0.0:49230->9669/tcp	
nebula-docker-compose_graphd_1	/usr/local/nebula/bin/nebu ...	Up (healthy)	0.0.0.0:49221->19669/tcp, 0.0.0.0:49220->19670/tcp, 0.0.0.0:9669->9669/tcp	
nebula-docker-compose_metad0_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:49212->19559/tcp, 0.0.0.0:49211->19560/tcp, 0.0.0.0:49213->9559/tcp, 9560/tcp	
nebula-docker-compose_metad1_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:49209->19559/tcp, 0.0.0.0:49208->19560/tcp, 0.0.0.0:49210->9559/tcp, 9560/tcp	
nebula-docker-compose_metad2_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:49206->19559/tcp, 0.0.0.0:49205->19560/tcp, 0.0.0.0:49207->9559/tcp, 9560/tcp	
nebula-docker-compose_storaged0_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:49218->19779/tcp, 0.0.0.0:49217->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:49219->9779/tcp, 9780/tcp	
nebula-docker-compose_storaged1_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:49215->19779/tcp, 0.0.0.0:49214->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:49216->9779/tcp, 9780/tcp	
nebula-docker-compose_storaged2_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:49226->19779/tcp, 0.0.0.0:49225->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:49227->9779/tcp, 9780/tcp	

If the service is abnormal, you can first confirm the abnormal container name (such as `nebula-docker-compose_graphd2_1`).

Then you can execute `docker ps` to view the corresponding `CONTAINER ID` (such as `2a6c56c405f5`).

[nebula-docker-compose]\$ docker ps						
CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	NAMES	PORTS
2a6c56c405f5	vesoft/nebula-graphd:nightly	"/usr/local/nebula/b..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_graphd2_1	0.0.0.0:49230->9669/tcp, 0.0.0.0:49229->19669/tcp, 0.0.0.0:49228->19670/tcp
7042e0a8e83d	vesoft/nebula-storaged:nightly	"./bin/nebula-storag..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_storaged2_1	9777-9778/tcp, 9780/tcp, 0.0.0.0:49227->9779/tcp, 0.0.0.0:49226->19779/tcp, 0.0.0.0:49225->19780/tcp
18e3ea63ad65	vesoft/nebula-storaged:nightly	"./bin/nebula-storag..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_storaged0_1	9777-9778/tcp, 9780/tcp, 0.0.0.0:49219->9779/tcp, 0.0.0.0:49218->19779/tcp, 0.0.0.0:49217->19780/tcp
4dcbaf8677a	vesoft/nebula-graphd:nightly	"/usr/local/nebula/b..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_graphd1_1	0.0.0.0:49224->9669/tcp, 0.0.0.0:49223->19669/tcp, 0.0.0.0:49222->19670/tcp
a74054c6ae25	vesoft/nebula-graphd:nightly	"/usr/local/nebula/b..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_graphd_1	0.0.0.0:9669->9669/tcp, 0.0.0.0:49221->19669/tcp, 0.0.0.0:49220->19670/tcp
880025a3858c	vesoft/nebula-storaged:nightly	"./bin/nebula-storag..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_storaged1_1	9777-9778/tcp, 9780/tcp, 0.0.0.0:49216->9779/tcp, 0.0.0.0:49215->19779/tcp, 0.0.0.0:49214->19780/tcp
45736a32a23a	vesoft/nebula-metad:nightly	"./bin/nebula-metad ..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_metad0_1	9560/tcp, 0.0.0.0:49213->9559/tcp, 0.0.0.0:49212->19559/tcp, 0.0.0.0:49211->19560/tcp
3b2c90eb073e	vesoft/nebula-metad:nightly	"./bin/nebula-metad ..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_metad2_1	9560/tcp, 0.0.0.0:49207->9559/tcp, 0.0.0.0:49206->19559/tcp, 0.0.0.0:49205->19560/tcp
7bb31b7a5b3f	vesoft/nebula-metad:nightly	"./bin/nebula-metad ..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_metad1_1	9560/tcp, 0.0.0.0:49210->9559/tcp, 0.0.0.0:49209->19559/tcp, 0.0.0.0:49208->19560/tcp

Use the `CONTAINER ID` to log in the container and troubleshoot.

```
nebula-docker-compose]$ docker exec -it 2a6c56c405f5 bash
[root@2a6c56c405f5 nebula]#
```

3.3.5 Next to do

[Connect to Nebula Graph](#)

Last update: January 14, 2022

3.4 Step 3: Connect to Nebula Graph

Nebula Graph supports multiple types of clients, including a CLI client, a GUI client, and clients developed in popular programming languages. This topic provides an overview of Nebula Graph clients and basic instructions on how to use the native CLI client, Nebula Console.

3.4.1 Nebula Graph clients

You can use supported [clients](#) or [console](#) to connect to Nebula Graph.

3.4.2 Use Nebula Console to connect to Nebula Graph

Prerequisites

- You have started [Nebula Graph services](#).
- The machine you plan to run Nebula Console on has network access to Nebula Graph services.
- The Nebula Console version is compatible with the Nebula Graph version.

Note


The same version of Nebula Console and Nebula Graph is the most compatible. There may be compatibility issues when connecting to Nebula Graph with a different version of Nebula Console. You may be unable to connect to Nebula Graph due to the compatibility issue and an error message `incompatible version between client and server` is displayed.

Steps





1. On the [nebula-console](#) page, select a Nebula Console version and click **Assets**.

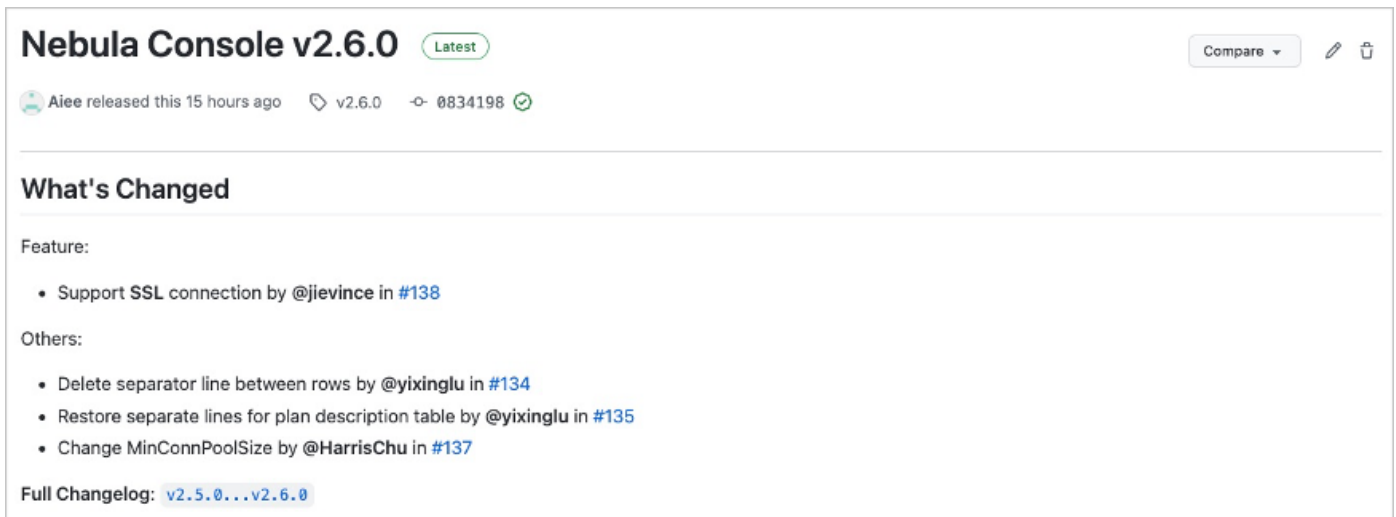Note

We recommend that you select the **latest** release.



Nebula Console v2.6.0 Latest Compare Edit Delete

 Ailee released this 15 hours ago  v2.6.0  0834198 

What's Changed

Feature:

- Support SSL connection by @jievance in #138

Others:

- Delete separator line between rows by @yixinglu in #134
- Restore separate lines for plan description table by @yixinglu in #135
- Change MinConnPoolSize by @HarrisChu in #137

Full Changelog: [v2.5.0...v2.6.0](#)

2. In the **Assets** area, find the correct binary file for the machine where you want to run Nebula Console and download the file to the machine.

▼ Assets 9	
 nebula-console-darwin-amd64-v2.6.0	5.42 MB
 nebula-console-darwin-arm64-v2.6.0	5.23 MB
 nebula-console-linux-amd64-v2.6.0	5.44 MB
 nebula-console-linux-arm-v2.6.0	4.68 MB
 nebula-console-linux-arm64-v2.6.0	5.04 MB
 nebula-console-windows-amd64-v2.6.0.exe	5.41 MB
 nebula-console-windows-arm-v2.6.0.exe	4.68 MB
 Source code (zip)	
 Source code (tar.gz)	

3. (Optional) Rename the binary file to `nebula-console` for convenience.

Note

For Windows, rename the file to `nebula-console.exe`.

4. On the machine to run Nebula Console, grant the execute permission of the `nebula-console` binary file to the user.

Note

For Windows, skip this step.

```
$ chmod 111 nebula-console
```

5. In the command line interface, change the working directory to the one where the `nebula-console` binary file is stored.

6. Run the following command to connect to Nebula Graph.

- For Linux or macOS:

```
$ ./nebula-console -addr <ip> -port <port> -u <username> -p <password>
[-t 120] [-e "ngQL_statement" | -f filename.ngQL]
```

- For Windows:

```
> nebula-console.exe -addr <ip> -port <port> -u <username> -p <password>
[-t 120] [-e "ngQL_statement" | -f filename.ngQL]
```

Parameters and descriptions are as follows.

Parameter	Description
<code>-h</code>	Shows the help menu.
<code>-addr</code>	Sets the IP address of the graphd service. The default address is 127.0.0.1.
<code>-port</code>	Sets the port number of the graphd service. The default port number is 9669.
<code>-u/-user</code>	Sets the username of your Nebula Graph account. Before enabling authentication, you can use any existing username. The default username is <code>root</code> .
<code>-p/-password</code>	Sets the password of your Nebula Graph account. Before enabling authentication, you can use any characters as the password.
<code>-t/-timeout</code>	Sets an integer-type timeout threshold of the connection. The unit is second. The default value is 120.
<code>-e/-eval</code>	Sets a string-type nGQL statement. The nGQL statement is executed once the connection succeeds. The connection stops after the result is returned.
<code>-f/-file</code>	Sets the path of an nGQL file. The nGQL statements in the file are executed once the connection succeeds. The result will be returned and the connection stops then.

You can find more details in the [Nebula Console Repository](#).

Last update: January 14, 2022


3.5 Step 4: Use nGQL (CRUD)

This topic will describe the basic CRUD operations in Nebula Graph.

For more information, see [nGQL guide](#).

3.5.1 Graph space and Nebula Graph schema

A Nebula Graph instance consists of one or more graph spaces. Graph spaces are physically isolated from each other. You can use different graph spaces in the same instance to store different datasets.

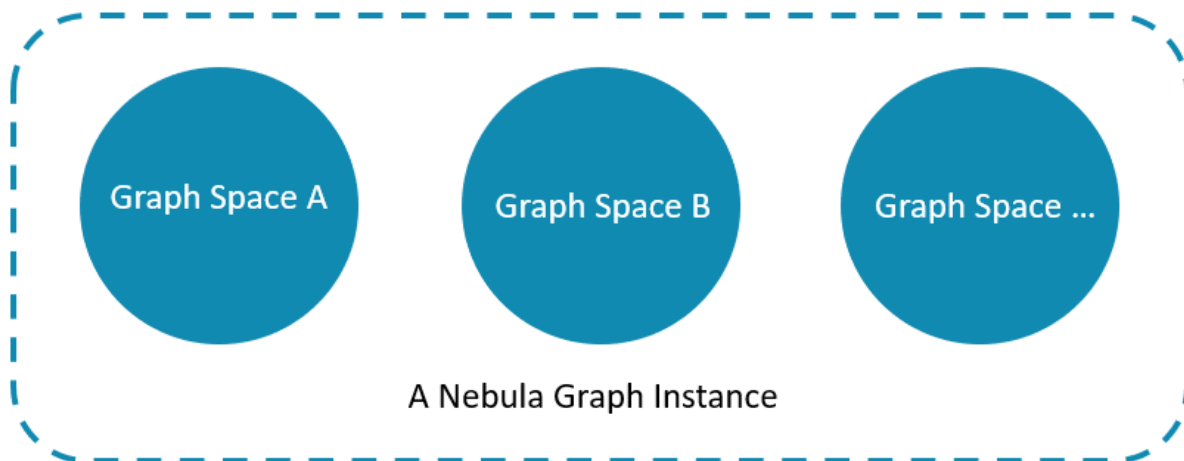


To insert data into a graph space, define a schema for the graph database. Nebula Graph schema is based on the following components.

Schema component	Description
Vertex	Represents an entity in the real world. A vertex can have zero to multiple tags.
Tag	The type of the same group of vertices. It defines a set of properties that describes the types of vertices.
Edge	Represents a directed relationship between two vertices.
Edge type	The type of an edge. It defines a group of properties that describes the types of edges.

For more information, see [Data modeling](#).

In this topic, we will use the following dataset to demonstrate basic CRUD operations.

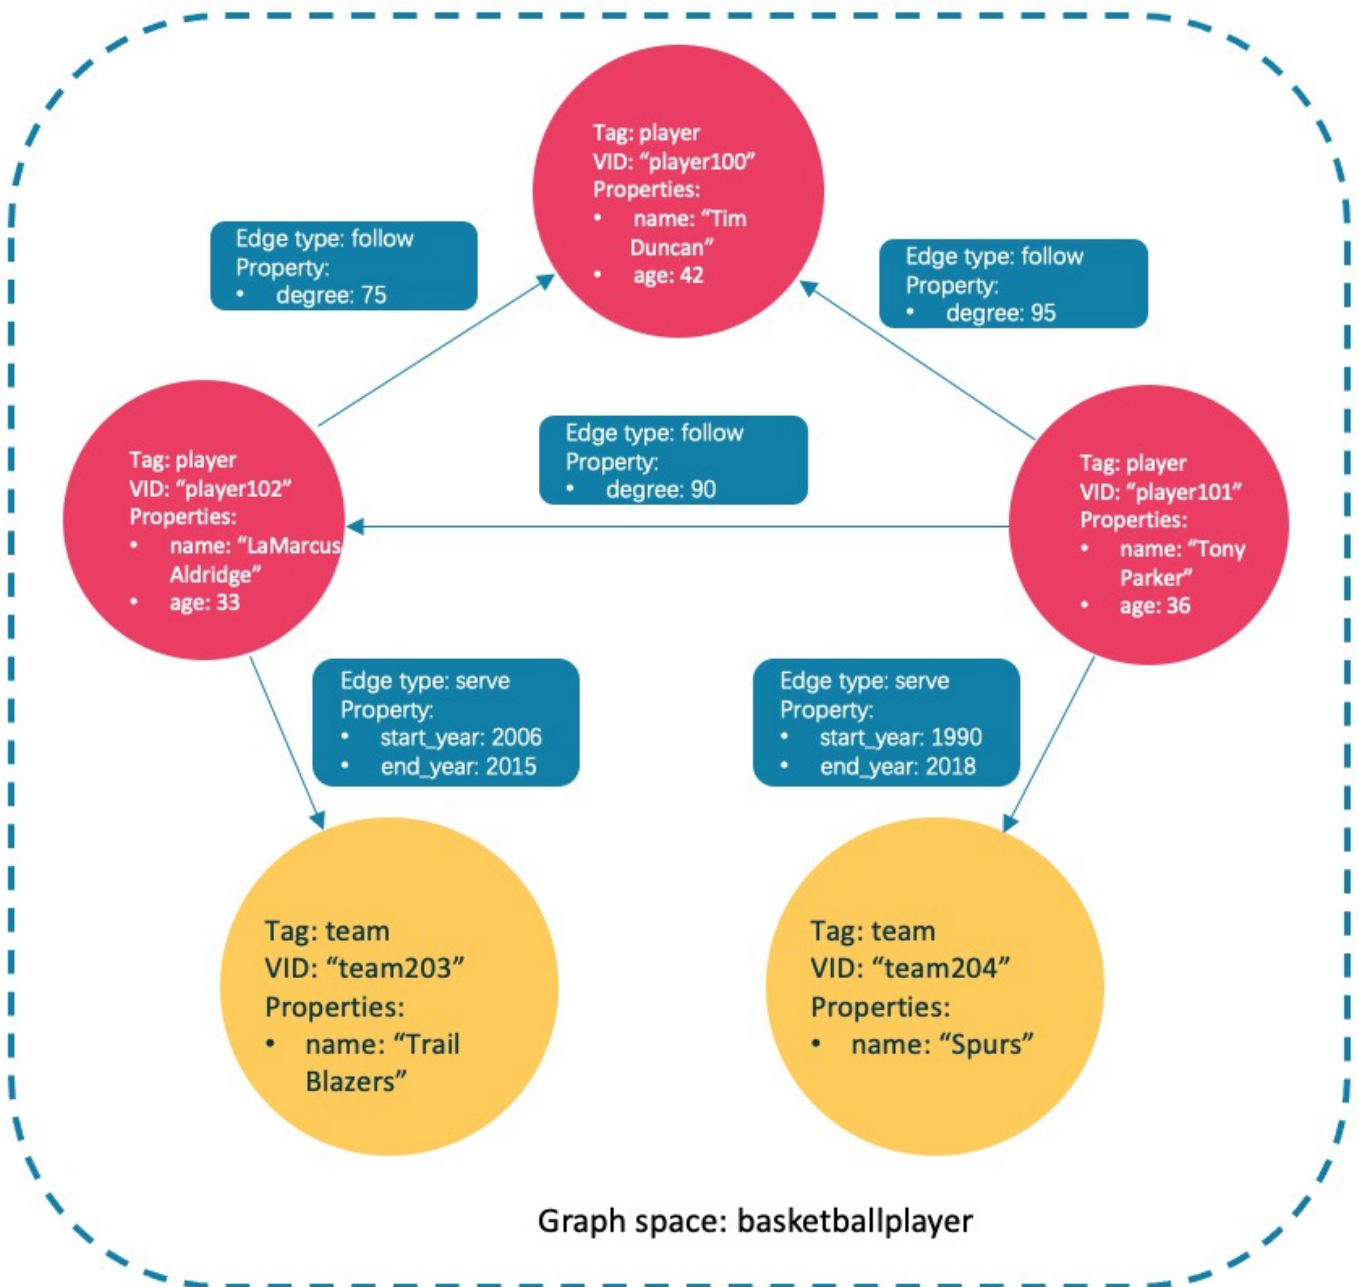

3.5.2 Manage the Storage services in a Nebula Graph cluster

First, add the Storage services to a Nebula Graph cluster.

Compatibility

From Nebula Graph version 3.0.0, the Storage services added in the configuration files **CANNOT** be read or written directly. The configuration files only register the Storage services into the Meta services. You must run the `ADD HOSTS` command to read and write data on Storage servers.

```
ADD HOSTS <ip>:<port> [, <ip>:<port> ...];
```

Example

```
nebula> ADD HOSTS 192.168.10.100:9779, 192.168.10.101:9779, 192.168.10.102:9779;
```


3.5.3 Check the machine status in the Nebula Graph cluster

We recommend that you check the machine status to make sure that all the Storage services are connected to the Meta services. Run `SHOW HOSTS` as follows.

```
nebula> SHOW HOSTS;
+-----+-----+-----+-----+-----+-----+-----+
| Host          | Port | Status | Leader count | Leader distribution | Partition distribution | Version |
+-----+-----+-----+-----+-----+-----+-----+
| "192.168.10.100" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
| "192.168.10.101" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
| "192.168.10.102" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
+-----+-----+-----+-----+-----+-----+-----+
```

From the **Status** column of the table in the returned results, you can see that all the Storage services are online.

Async implementation of `CREATE` and `ALTER`

Caution

In Nebula Graph, the following `CREATE` or `ALTER` commands are implemented in an async way and take effect in the **next** heartbeat cycle. Otherwise, an error will be returned. To make sure the follow-up operations work as expected, Wait for two heartbeat cycles, i.e., 20 seconds.

- `CREATE SPACE`
- `CREATE TAG`
- `CREATE EDGE`
- `ALTER TAG`
- `ALTER EDGE`
- `CREATE TAG INDEX`
- `CREATE EDGE INDEX`

Note

The default heartbeat interval is 10 seconds. To change the heartbeat interval, modify the `heartbeat_interval_secs` parameter in the `configuration files` for all services.

3.5.4 Create and use a graph space

nGQL syntax

- Create a graph space:

```
CREATE SPACE [IF NOT EXISTS] <graph_space_name> (
  [partition_num = <partition_number>],
  [replica_factor = <replica_number>],
  vid_type = {FIXED_STRING(<N>) | INT64}
)
[COMMENT = '<comment>'];
```

For more information on parameters, see `CREATE SPACE`.

- List graph spaces and check if the creation is successful:

```
nebula> SHOW SPACES;
```

- Use a graph space:

```
USE <graph_space_name>;
```

Examples

1. Use the following statement to create a graph space named `basketballplayer`.

```
nebula> CREATE SPACE basketballplayer(partition_num=15, replica_factor=1, vid_type=fixed_string(30));
```

2. Check the partition distribution with `SHOW HOSTS` to make sure that the partitions are distributed in a balanced way.

```
nebula> SHOW HOSTS;
+-----+-----+-----+-----+-----+-----+
| Host      | Port  | Status | Leader count | Leader distribution | Partition distribution | Version |
+-----+-----+-----+-----+-----+-----+
| "storaged0" | 9779 | "ONLINE" | 5 | "basketballplayer:5" | "basketballplayer:5" | "3.0.0" |
| "storaged1" | 9779 | "ONLINE" | 5 | "basketballplayer:5" | "basketballplayer:5" | "3.0.0" |
| "storaged2" | 9779 | "ONLINE" | 5 | "basketballplayer:5" | "basketballplayer:5" | "3.0.0" |
+-----+-----+-----+-----+-----+-----+
```

If the **Leader distribution** is uneven, use `BALANCE LEADER` to redistribute the partitions. For more information, see [BALANCE](#).

3. Use the `basketballplayer` graph space.

```
nebula[(none)]> USE basketballplayer;
```

You can use `SHOW SPACES` to check the graph space you created.

```
nebula> SHOW SPACES;
+-----+
| Name      |
+-----+
| "basketballplayer" |
+-----+
```

3.5.5 Create tags and edge types

nGQL syntax

```
CREATE {TAG | EDGE} [IF NOT EXISTS] {<tag_name> | <edge_type_name>}
(
  <prop_name> <data_type> [NULL | NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']
  [{, <prop_name> <data_type> [NULL | NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']} ...]
)
[TTL_DURATION = <ttl_duration>]
[TTL_COL = <prop_name>]
[COMMENT = '<comment>'];
```

For more information on parameters, see [CREATE TAG](#) and [CREATE EDGE](#).

Examples

Create tags `player` and `team`, and edge types `follow` and `serve`. Descriptions are as follows.

Component name	Type	Property
player	Tag	name (string), age (int)
team	Tag	name (string)
follow	Edge type	degree (int)
serve	Edge type	start_year (int), end_year (int)

```
nebula> CREATE TAG player(name string, age int);

nebula> CREATE TAG team(name string);

nebula> CREATE EDGE follow(degree int);

nebula> CREATE EDGE serve(start_year int, end_year int);
```

3.5.6 Insert vertices and edges

You can use the `INSERT` statement to insert vertices or edges based on existing tags or edge types.

nGQL syntax

- Insert vertices:

```
INSERT VERTEX [IF NOT EXISTS] [tag_props, [tag_props] ...]
VALUES <vid>: ([prop_value_list])

tag_props:
  tag_name ([prop_name_list])

prop_name_list:
  [prop_name [, prop_name] ...]

prop_value_list:
  [prop_value [, prop_value] ...]
```

`vid` is short for Vertex ID. A `vid` must be a unique string value in a graph space. For details, see [INSERT VERTEX](#).

- Insert edges:

```
INSERT EDGE [IF NOT EXISTS] <edge_type> ( <prop_name_list> ) VALUES
<src_vid> -> <dst_vid>[@<rank>] : ( <prop_value_list> )
[, <src_vid> -> <dst_vid>[@<rank>] : ( <prop_value_list> ), ...];
<prop_name_list> ::=
[ <prop_name> [, <prop_name> ] ...]
<prop_value_list> ::=
[ <prop_value> [, <prop_value> ] ...]
```

For more information on parameters, see [INSERT EDGE](#).

Examples

- Insert vertices representing basketball players and teams:

```
nebula> INSERT VERTEX player(name, age) VALUES "player100":("Tim Duncan", 42);
nebula> INSERT VERTEX player(name, age) VALUES "player101":("Tony Parker", 36);
nebula> INSERT VERTEX player(name, age) VALUES "player102":("LaMarcus Aldridge", 33);
nebula> INSERT VERTEX team(name) VALUES "team203":("Trail Blazers"), "team204":("Spurs");
```

- Insert edges representing the relations between basketball players and teams:

```
nebula> INSERT EDGE follow(degree) VALUES "player101" -> "player100":(95);
nebula> INSERT EDGE follow(degree) VALUES "player101" -> "player102":(90);
nebula> INSERT EDGE follow(degree) VALUES "player102" -> "player100":(75);
nebula> INSERT EDGE serve(start_year, end_year) VALUES "player101" -> "team204":(1999, 2018), "player102" -> "team203":(2006, 2015);
```

3.5.7 Read data

- The `GO` statement can traverse the database based on specific conditions. A `GO` traversal starts from one or more vertices, along one or more edges, and returns information in a form specified in the `YIELD` clause.
- The `FETCH` statement is used to get properties from vertices or edges.
- The `LOOKUP` statement is based on [indexes](#). It is used together with the `WHERE` clause to search for the data that meet the specific conditions.
- The `MATCH` statement is the most commonly used statement for graph data querying. It can describe all kinds of graph patterns, but it relies on [indexes](#) to match data patterns in Nebula Graph. Therefore, its performance still needs optimization.

nGQL syntax

- GO

```
GO [[<M> TO] <N> STEPS ] FROM <vertex_list>
OVER <edge_type_list> [{REVERSELY | BIDIRECT}]
[ WHERE <conditions> ]
YIELD [DISTINCT] <return_list>
[{ SAMPLE <sample_list> | <limit_by_list_clause> }]
[| GROUP BY {<col_name> | expression> | <position>} YIELD <col_name>]
[| ORDER BY <expression> [{ASC | DESC}]]
[| LIMIT [<offset>,<N>] <number_rows>];
```

- FETCH

- Fetch properties on tags:

```
FETCH PROP ON {<tag_name>[, tag_name ...] | *}
<vid> [, vid ...]
YIELD <return_list> [AS <alias>];
```

- Fetch properties on edges:

```
FETCH PROP ON <edge_type> <src_vid> -> <dst_vid>[@<rank>] [, <src_vid> -> <dst_vid> ...]
YIELD <output>;
```

- LOOKUP

```
LOOKUP ON {<vertex_tag> | <edge_type>}
[WHERE <expression> [AND <expression> ...]]
YIELD <return_list> [AS <alias>];
<return_list>
  <prop_name> [AS <col_alias>] [, <prop_name> [AS <prop_alias>] ...];
```

- MATCH

```
MATCH <pattern> [<clause_1>] RETURN <output> [<clause_2>];
```

Examples of GO statement

- Search for the players that the player with VID `player101` follows.

```
nebula> GO FROM "player101" OVER follow YIELD id($$);
+-----+
| id($$) |
+-----+
| "player100" |
| "player102" |
```

```
| "player125" |
+-----+
```

- Filter the players that the player with VID `player101` follows whose age is equal to or greater than 35. Rename the corresponding columns in the results with `Teammate` and `Age`.

```
nebula> GO FROM "player101" OVER follow WHERE properties($$).age >= 35 \
      YIELD properties($$).name AS Teammate, properties($$).age AS Age;
+-----+-----+
| Teammate | Age |
+-----+-----+
| "Tim Duncan" | 42 |
| "Manu Ginobili" | 41 |
+-----+-----+
```

| Clause/Sign | Description | |-----+-----| | **YIELD** | Specifies what values or results you want to return from the query. | | **\$\$** | Represents the target vertices. | | **** | A line-breaker. |

- Search for the players that the player with VID `player101` follows. Then retrieve the teams of the players that the player with VID `player100` follows. To combine the two queries, use a pipe or a temporary variable.
- With a pipe:

```
nebula> GO FROM "player101" OVER follow YIELD dst(edge) AS id | \
      GO FROM $-.id OVER serve YIELD properties($$).name AS Team, \
      properties($^).name AS Player;
+-----+-----+
| Team | Player |
+-----+-----+
| "Spurs" | "Tim Duncan" |
| "Trail Blazers" | "LaMarcus Aldridge" |
| "Spurs" | "LaMarcus Aldridge" |
| "Spurs" | "Manu Ginobili" |
+-----+-----+
```

Clause/Sign	Description
<code>\$^</code>	Represents the source vertex of the edge.
<code> </code>	A pipe symbol can combine multiple queries.
<code>\$-</code>	Represents the outputs of the query before the pipe symbol.

- With a temporary variable:

Note

Once a composite statement is submitted to the server as a whole, the life cycle of the temporary variables in the statement ends.

```
nebula> $var = GO FROM "player101" OVER follow YIELD dst(edge) AS id; \
      GO FROM $var.id OVER serve YIELD properties($$).name AS Team, \
      properties($^).name AS Player;
+-----+-----+
| Team | Player |
+-----+-----+
| "Spurs" | "Tim Duncan" |
| "Trail Blazers" | "LaMarcus Aldridge" |
| "Spurs" | "LaMarcus Aldridge" |
| "Spurs" | "Manu Ginobili" |
+-----+-----+
```

Example of **FETCH** statement

Use **FETCH**: Fetch the properties of the player with VID `player100`.

```
nebula> FETCH PROP ON player "player100" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 42, name: "Tim Duncan"} |
+-----+
```

Note

The examples of `LOOKUP` and `MATCH` statements are in [indexes](#).

3.5.8 Update vertices and edges

Users can use the `UPDATE` or the `UPSERT` statements to update existing data.

`UPSERT` is the combination of `UPDATE` and `INSERT`. If you update a vertex or an edge with `UPSERT`, the database will insert a new vertex or edge if it does not exist.

Note

`UPSERT` operates serially in a partition-based order. Therefore, it is slower than `INSERT` OR `UPDATE`. And `UPSERT` has concurrency only between multiple partitions.

nGQL syntax

- `UPDATE` vertices:

```
UPDATE VERTEX <vid> SET <properties to be updated>
[WHEN <condition>] [YIELD <columns>];
```

- `UPDATE` edges:

```
UPDATE EDGE <source vid> -> <destination vid> [@rank] OF <edge_type>
SET <properties to be updated> [WHEN <condition>] [YIELD <columns to be output>];
```

- `UPSERT` vertices or edges:

```
UPSERT {VERTEX <vid> | EDGE <edge_type>} SET <update_columns>
[WHEN <condition>] [YIELD <columns>];
```

Examples

- `UPDATE` the `name` property of the vertex with VID `player100` and check the result with the `FETCH` statement.

```
nebula> UPDATE VERTEX "player100" SET player.name = "Tim";

nebula> FETCH PROP ON player "player100" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 42, name: "Tim"} |
+-----+
```

- `UPDATE` the `degree` property of an edge and check the result with the `FETCH` statement.

```
nebula> UPDATE EDGE "player101" -> "player100" OF follow SET degree = 96;

nebula> FETCH PROP ON follow "player101" -> "player100" YIELD properties(edge);
+-----+
| properties(EDGE) |
+-----+
| {degree: 96} |
+-----+
```

- Insert a vertex with VID `player111` and `UPSERT` it.

```
nebula> INSERT VERTEX player(name,age) VALUES "player111":("David West", 38);

nebula> UPSERT VERTEX "player111" SET player.name = "David", player.age = $^.player.age + 11 \
    WHEN $^.player.name == "David West" AND $^.player.age > 20 \
    YIELD $^.player.name AS Name, $^.player.age AS Age;
+-----+-----+
| Name | Age |
+-----+-----+
| "David" | 49 |
+-----+-----+
```

3.5.9 Delete vertices and edges

nGQL syntax

- Delete vertices:

```
DELETE VERTEX <vid1>[, <vid2>...]
```

- Delete edges:

```
DELETE EDGE <edge_type> <src_vid> -> <dst_vid>[@<rank>]  
[, <src_vid> -> <dst_vid>...]
```

Examples

- Delete vertices:

```
nebula> DELETE VERTEX "player111", "team203";
```

- Delete edges:

```
nebula> DELETE EDGE follow "player101" -> "team204";
```

3.5.10 About indexes

Users can add indexes to tags and edge types with the [CREATE INDEX](#) statement.

Must-read for using indexes

Both [MATCH](#) and [LOOKUP](#) statements depend on the indexes. But indexes can dramatically reduce the write performance (as much as 90% or even more). **DO NOT** use indexes in production environments unless you are fully aware of their influences on your service.

Users **MUST** rebuild indexes for pre-existing data. Otherwise, the pre-existing data cannot be indexed and therefore cannot be returned in [MATCH](#) or [LOOKUP](#) statements. For more information, see [REBUILD INDEX](#).

nGQL syntax

- Create an index:

```
CREATE {TAG | EDGE} INDEX [IF NOT EXISTS] <index_name>  
ON {<tag_name> | <edge_name>} ([<prop_name_list>]) [COMMENT = '<comment>'];
```

- Rebuild an index:

```
REBUILD {TAG | EDGE} INDEX <index_name>;
```

Note

Define the index length when creating an index for a variable-length property. In UTF-8 encoding, a non-ascii character occupies 3 bytes. You should set an appropriate index length according to the variable-length property. For example, the index should be 30 bytes for 10 non-ascii characters. For more information, see [CREATE INDEX](#)

Examples of [LOOKUP](#) and [MATCH](#) (index-based)

Make sure there is an [index](#) for [LOOKUP](#) or [MATCH](#) to use. If there is not, create an index first.

Find the information of the vertex with the tag `player` and its value of the `name` property is `Tony Parker`.

This example creates the index `player_index_1` on the `name` property.

```
nebula> CREATE TAG INDEX IF NOT EXISTS player_index_1 ON player(name(20));
```

This example rebuilds the index to make sure it takes effect on pre-existing data.

```
nebula> REBUILD TAG INDEX player_index_1
+-----+
| New Job Id |
+-----+
| 31         |
+-----+
```

This example uses the `LOOKUP` statement to retrieve the vertex property.

```
nebula> LOOKUP ON player WHERE player.name == "Tony Parker" \
      YIELD properties(vertex).name AS name, properties(vertex).age AS age;
+-----+-----+
| name      | age |
+-----+-----+
| "Tony Parker" | 36 |
+-----+-----+
```

This example uses the `MATCH` statement to retrieve the vertex property.

```
nebula> MATCH (v:player{name:"Tony Parker"}) RETURN v;
+-----+-----+
| v              |
+-----+-----+
| ("player101" :player{age: 36, name: "Tony Parker"}) |
+-----+-----+
```

Last update: February 8, 2022

3.6 nGQL cheatsheet

3.6.1 Functions

- Math functions

Function	Description
<code>double abs(double x)</code>	Returns the absolute value of the argument.
<code>double floor(double x)</code>	Returns the largest integer value smaller than or equal to the argument. (Rounds down)
<code>double ceil(double x)</code>	Returns the smallest integer greater than or equal to the argument. (Rounds up)
<code>double round(double x)</code>	Returns the integer value nearest to the argument. Returns a number farther away from 0 if the argument is in the middle.
<code>double sqrt(double x)</code>	Returns the square root of the argument.
<code>double cbrt(double x)</code>	Returns the cubic root of the argument.
<code>double hypot(double x, double y)</code>	Returns the hypotenuse of a right-angled triangle.
<code>double pow(double x, double y)</code>	Returns the result of (x^y) .
<code>double exp(double x)</code>	Returns the result of (e^x) .
<code>double exp2(double x)</code>	Returns the result of (2^x) .
<code>double log(double x)</code>	Returns the base-e logarithm of the argument.
<code>double log2(double x)</code>	Returns the base-2 logarithm of the argument.
<code>double log10(double x)</code>	Returns the base-10 logarithm of the argument.
<code>double sin(double x)</code>	Returns the sine of the argument.
<code>double asin(double x)</code>	Returns the inverse sine of the argument.
<code>double cos(double x)</code>	Returns the cosine of the argument.
<code>double acos(double x)</code>	Returns the inverse cosine of the argument.
<code>double tan(double x)</code>	Returns the tangent of the argument.
<code>double atan(double x)</code>	Returns the inverse tangent of the argument.
<code>double rand()</code>	Returns a random floating point number in the range from 0 (inclusive) to 1 (exclusive); i.e. [0,1).
<code>int rand32(int min, int max)</code>	Returns a random 32-bit integer in <code>[min, max)</code> . If you set only one argument, it is parsed as <code>max</code> and <code>min</code> is 0 by default. If you set no argument, the system returns a random signed 32-bit integer.
<code>int rand64(int min, int max)</code>	Returns a random 64-bit integer in <code>[min, max)</code> . If you set only one argument, it is parsed as <code>max</code> and <code>min</code> is 0 by default. If you set no argument, the system returns a random signed 64-bit integer.
<code>collect()</code>	Puts all the collected values into a list.
<code>avg()</code>	Returns the average value of the argument.
<code>count()</code>	Returns the number of records.
<code>max()</code>	Returns the maximum value.
<code>min()</code>	Returns the minimum value.
<code>std()</code>	Returns the population standard deviation.
<code>sum()</code>	Returns the sum value.
<code>bit_and()</code>	Bitwise AND.

Function	Description
<code>bit_or()</code>	Bitwise OR.
<code>bit_xor()</code>	Bitwise XOR.
<code>int size()</code>	Returns the number of elements in a list or a map.
<code>int range(int start, int end, int step)</code>	Returns a list of integers from <code>[start,end]</code> in the specified steps. <code>step</code> is 1 by default.
<code>int sign(double x)</code>	Returns the signum of the given number. If the number is <code>0</code> , the system returns <code>0</code> . If the number is negative, the system returns <code>-1</code> . If the number is positive, the system returns <code>1</code> .
<code>double e()</code>	Returns the base of the natural logarithm, <code>e</code> (2.718281828459045).
<code>double pi()</code>	Returns the mathematical constant <code>pi</code> (3.141592653589793).
<code>double radians()</code>	Converts degrees to radians. <code>radians(180)</code> returns <code>3.141592653589793</code> .

String functions

Function	Description
<code>int strcasecmp(string a, string b)</code>	Compares string a and b without case sensitivity. When <code>a = b</code> , the return value is 0. When <code>a > b</code> , the return value is greater than 0. When <code>a < b</code> , the return value is less than 0.
<code>string lower(string a)</code>	Returns the argument in lowercase.
<code>string toLower(string a)</code>	The same as <code>lower()</code> .
<code>string upper(string a)</code>	Returns the argument in uppercase.
<code>string toUpper(string a)</code>	The same as <code>upper()</code> .
<code>int length(string a)</code>	Returns the length of the given string in bytes.
<code>string trim(string a)</code>	Removes leading and trailing spaces.
<code>string ltrim(string a)</code>	Removes leading spaces.
<code>string rtrim(string a)</code>	Removes trailing spaces.
<code>string left(string a, int count)</code>	Returns a substring consisting of <code>count</code> characters from the left side of string a. If string a is shorter than <code>count</code> , the system returns string a.
<code>string right(string a, int count)</code>	Returns a substring consisting of <code>count</code> characters from the right side of string a. If string a is shorter than <code>count</code> , the system returns string a.
<code>string lpad(string a, int size, string letters)</code>	Left-pads string a with string <code>letters</code> and returns a substring with the length of <code>size</code> .
<code>string rpad(string a, int size, string letters)</code>	Right-pads string a with string <code>letters</code> and returns a substring with the length of <code>size</code> .
<code>string substr(string a, int pos, int count)</code>	Returns a substring extracting <code>count</code> characters starting from the specified position <code>pos</code> of string a.
<code>string substring(string a, int pos, int count)</code>	The same as <code>substr()</code> .
<code>string reverse(string)</code>	Returns a string in reverse order.
<code>string replace(string a, string b, string c)</code>	Replaces string b in string a with string c.
<code>list split(string a, string b)</code>	Splits string a at string b and returns a list of strings.
<code>string toString()</code>	Takes in any data type and converts it into a string.
<code>int hash()</code>	Takes in any data type and encodes it into a hash value.

Data and time functions

Function	Description
<code>int now()</code>	Returns the current date and time of the system timezone.
<code>timestamp timestamp()</code>	Returns the current date and time of the system timezone.
<code>date date()</code>	Returns the current UTC date based on the current system.
<code>time time()</code>	Returns the current UTC time based on the current system.
<code>datetime datetime()</code>	Returns the current UTC date and time based on the current system.

- [Schema functions](#)
- For nGQL statements

Function	Description
<code>id(vertex)</code>	Returns the ID of a vertex. The data type of the result is the same as the vertex ID.
<code>map properties(vertex)</code>	Returns the properties of a vertex.
<code>map properties(edge)</code>	Returns the properties of an edge.
<code>string type(edge)</code>	Returns the edge type of an edge.
<code>src(edge)</code>	Returns the source vertex ID of an edge. The data type of the result is the same as the vertex ID.
<code>dst(edge)</code>	Returns the destination vertex ID of an edge. The data type of the result is the same as the vertex ID.
<code>int rank(edge)</code>	Returns the rank value of an edge.
<code>vertex</code>	Returns the information of vertices, including VIDs, tags, properties, and values.
<code>edge</code>	Returns the information of edges, including edge types, source vertices, destination vertices, ranks, properties, and values.
<code>vertices</code>	Returns the information of vertices in a subgraph. For more information, see GET SUBGRAPH .
<code>edges</code>	Returns the information of edges in a subgraph. For more information, see GET SUBGRAPH .
<code>path</code>	Returns the information of a path. For more information, see FIND PATH .

- For statements compatible with openCypher

Function	Description
<code>id(<vertex>)</code>	Returns the ID of a vertex. The data type of the result is the same as the vertex ID.
<code>list tags(<vertex>)</code>	Returns the Tag of a vertex, which serves the same purpose as <code>labels()</code> .
<code>list labels(<vertex>)</code>	Returns the Tag of a vertex, which serves the same purpose as <code>tags()</code> . This function is used for compatibility with openCypher syntax.
<code>map properties(<vertex_or_edge>)</code>	Returns the properties of a vertex or an edge.
<code>string type(<edge>)</code>	Returns the edge type of an edge.
<code>src(<edge>)</code>	Returns the source vertex ID of an edge. The data type of the result is the same as the vertex ID.
<code>dst(<edge>)</code>	Returns the destination vertex ID of an edge. The data type of the result is the same as the vertex ID.
<code>vertex startNode(<path>)</code>	Visits an edge or a path and returns its source vertex ID.
<code>string endNode(<path>)</code>	Visits an edge or a path and returns its destination vertex ID.
<code>int rank(<edge>)</code>	Returns the rank value of an edge.

List functions

•

Function	Description
keys(expr)	Returns a list containing the string representations for all the property names of vertices, edges, or maps.
labels(vertex)	Returns the list containing all the tags of a vertex.
nodes(path)	Returns the list containing all the vertices in a path.
range(start, end [, step])	Returns the list containing all the fixed-length steps in <code>[start,end]</code> . <code>step</code> is 1 by default.
relationships(path)	Returns the list containing all the relationships in a path.
reverse(list)	Returns the list reversing the order of all elements in the original list.
tail(list)	Returns all the elements of the original list, excluding the first one.
head(list)	Returns the first element of a list.
last(list)	Returns the last element of a list.
coalesce(list)	Returns the first not null value in a list.
reduce()	See reduce() function

count() function

Function	Description
count()	<p>Syntax: <code>count({expr *})</code> .</p> <p><code>count()</code> returns the number of rows (including NULL).</p> <p><code>count(expr)</code> returns the number of non-NULL values that meet the expression.</p> <p><code>count()</code> and <code>size()</code> are different.</p>

collect() function

Function	Description
collect()	The <code>collect()</code> function returns a list containing the values returned by an expression. Using this function aggregates data by merging multiple records or values into a single list.

reduce() function

Function	Syntax	Description
reduce()	<code>reduce(<accumulator> = <initial>, <variable> IN <list> <expression>)</code>	The <code>reduce()</code> function applies an expression to each element in a list one by one, chains the result to the next iteration by taking it as the initial value, and returns the final result.

hash() function

Function	Description
hash()	<p>The <code>hash()</code> function returns the hash value of the argument. The argument can be a number, a string, a list, a boolean, null, or an expression that evaluates to a value of the preceding data types. The source code of the <code>hash()</code> function (MurmurHash2), seed (<code>0xc70f6907UL</code>), and other parameters can be found in MurmurHash2.h .</p>

• concat() function

Function	Description
concat()	The <code>concat()</code> function requires at least two or more strings. All the parameters are concatenated into one string. Syntax: <code>concat(string1,string2,...)</code>

• concat_ws() function

Function	Description
concat_ws()	The <code>concat_ws()</code> function connects two or more strings with a predefined separator.

• Predicate functions

Predicate functions return `true` or `false`. They are most commonly used in `WHERE` clauses.

```
<predicate>(<variable> IN <list> WHERE <condition>)
```

Function	Description
exists()	Returns <code>true</code> if the specified property exists in the vertex, edge or map. Otherwise, returns <code>false</code> .
any()	Returns <code>true</code> if the specified predicate holds for at least one element in the given list. Otherwise, returns <code>false</code> .
all()	Returns <code>true</code> if the specified predicate holds for all elements in the given list. Otherwise, returns <code>false</code> .
none()	Returns <code>true</code> if the specified predicate holds for no element in the given list. Otherwise, returns <code>false</code> .
single()	Returns <code>true</code> if the specified predicate holds for exactly one of the elements in the given list. Otherwise, returns <code>false</code> .

• CASE expressions

The `CASE` expression uses conditions to filter the result of an nGQL query statement. It is usually used in the `YIELD` and `RETURN` clauses. The `CASE` expression will traverse all the conditions. When the first condition is met, the `CASE` expression stops reading the conditions and returns the result. If no conditions are met, it returns the result in the `ELSE` clause. If there is no `ELSE` clause and no conditions are met, it returns `NULL`.

Syntax:

```
CASE <comparer>
WHEN <value> THEN <result>
[WHEN ...]
[ELSE <default>]
END
```

Parameter	Description
comparer	A value or a valid expression that outputs a value. This value is used to compare with the <code>value</code> .
value	It will be compared with the <code>comparer</code> . If the <code>value</code> matches the <code>comparer</code> , then this condition is met.
result	The <code>result</code> is returned by the <code>CASE</code> expression if the <code>value</code> matches the <code>comparer</code> .
default	The <code>default</code> is returned by the <code>CASE</code> expression if no conditions are met.

3.6.2 General queries statements

• MATCH


```
MATCH <pattern> [<clause_1>] RETURN <output> [<clause_2>];
```

Pattern	Example	Description
Match vertices	<code>(v)</code>	You can use a user-defined variable in a pair of parentheses to represent a vertex in a pattern. For example: <code>(v)</code> .
Match tags	<code>MATCH (v:player) RETURN v</code>	You can specify a tag with <code>:<tag_name></code> after the vertex in a pattern.
Match multiple tags	<code>MATCH (v:player:team) RETURN v LIMIT 10</code>	To match vertices with multiple tags, use colons (:).
Match vertex properties	<code>MATCH (v:player{name:"Tim Duncan"}) RETURN v</code>	You can specify a vertex property with <code>{<prop_name>: <prop_value>}</code> after the tag in a pattern.
Match a VID.	<code>MATCH (v) WHERE id(v) == 'player101' RETURN v</code>	You can use the VID to match a vertex. The <code>id()</code> function can retrieve the VID of a vertex.
Match multiple VIDs.	<code>MATCH (v:player { name: 'Tim Duncan' })--(v2) WHERE id(v2) IN ["player101", "player102"] RETURN v2</code>	To match multiple VIDs, use <code>WHERE id(v) IN [vid_list]</code> .
Match connected vertices	<code>MATCH (v:player{name:"Tim Duncan"})--(v2) RETURN v2.player.name AS Name</code>	You can use the <code>--</code> symbol to represent edges of both directions and match vertices connected by these edges. You can add a <code>></code> or <code><</code> to the <code>--</code> symbol to specify the direction of an edge.
Match paths	<code>MATCH p=(v:player{name:"Tim Duncan"})-->(v2) RETURN p</code>	Connected vertices and edges form a path. You can use a user-defined variable to name a path as follows.
Match edges	<code>MATCH (v:player{name:"Tim Duncan"})-[e]-(v2) RETURN e</code>	Besides using <code>--</code> , <code>--></code> , or <code>--<</code> to indicate a nameless edge, you can use a user-defined variable in a pair of square brackets to represent a named edge. For example: <code>-[e]-</code> .
Match an edge type	<code>MATCH ()-[e:follow]-() RETURN e</code>	Just like vertices, you can specify an edge type with <code>:<edge_type></code> in a pattern. For example: <code>-[e:follow]-</code> .
Match edge type properties	<code>MATCH (v:player{name:"Tim Duncan"})-[e:follow{degree:95}]- >(v2) RETURN e</code>	You can specify edge type properties with <code>{<prop_name>: <prop_value>}</code> in a pattern. For example: <code>[e:follow{likeness:95}]</code> .
Match multiple edge types	<code>MATCH (v:player{name:"Tim Duncan"})-[e:follow :serve]- >(v2) RETURN e</code>	The <code> </code> symbol can help matching multiple edge types. For example: <code>[e:follow :serve]</code> . The English colon (:) before the first edge type cannot be omitted, but the English colon before the subsequent edge type can be omitted, such as <code>[e:follow serve]</code> .
Match multiple edges	<code>MATCH (v:player{name:"Tim Duncan"})-[]->(v2)<-[e:serve]- (v3) RETURN v2, v3</code>	You can extend a pattern to match multiple edges in a path.
Match fixed-length paths	<code>MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*2]->(v2) RETURN DISTINCT v2 AS Friends</code>	You can use the <code>:<edge_type>*<hop></code> pattern to match a fixed-length path. <code>hop</code> must be a non-negative integer. The data type of <code>e</code> is the list.
Match variable-length paths	<code>MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*1..3]->(v2) RETURN v2 AS Friends</code>	<code>minHop</code> : Optional. It represents the minimum length of the path. <code>minHop</code> must be a non-negative integer. The default value is 1. <code>maxHop</code> : Required. It represents the maximum length of the path. <code>maxHop</code> must be a non-negative integer. It has no default value. The data type of <code>e</code> is the list.

Pattern	Example	Description
Match variable-length paths with multiple edge types	<pre>MATCH p=(v:player{name:"Tim Duncan"})-[e:follow serve*2]- >(v2) RETURN DISTINCT v2</pre>	You can specify multiple edge types in a fixed-length or variable-length pattern. In this case, <code>hop</code> , <code>minHop</code> , and <code>maxHop</code> take effect on all edge types. The data type of <code>e</code> is the list.
Retrieve vertex or edge information	<pre>MATCH (v:player{name:"Tim Duncan"}) RETURN v MATCH (v:player{name:"Tim Duncan"})-[e]->(v2) RETURN e</pre>	Use <code>RETURN {<vertex_name> <edge_name>}</code> to retrieve all the information of a vertex or an edge.
Retrieve VIDs	<pre>MATCH (v:player{name:"Tim Duncan"}) RETURN id(v)</pre>	Use the <code>id()</code> function to retrieve VIDs.
Retrieve tags	<pre>MATCH (v:player{name:"Tim Duncan"}) RETURN labels(v)</pre>	Use the <code>labels()</code> function to retrieve the list of tags on a vertex. To retrieve the <code>nth</code> element in the <code>labels(v)</code> list, use <code>labels(v)[n-1]</code> .
Retrieve a single property on a vertex or an edge	<pre>MATCH (v:player{name:"Tim Duncan"}) RETURN v.player.age</pre>	Use <code>RETURN {<vertex_name> <edge_name>}.<property></code> to retrieve a single property. Use <code>AS</code> to specify an alias for a property.
Retrieve all properties on a vertex or an edge	<pre>MATCH p=(v:player{name:"Tim Duncan"})-[]->(v2) RETURN properties(v2)</pre>	Use the <code>properties()</code> function to retrieve all properties on a vertex or an edge.
Retrieve edge types	<pre>MATCH p=(v:player{name:"Tim Duncan"})-[e]->() RETURN DISTINCT type(e)</pre>	Use the <code>type()</code> function to retrieve the matched edge types.
Retrieve paths	<pre>MATCH p=(v:player{name:"Tim Duncan"})-[*3]->() RETURN p</pre>	Use <code>RETURN <path_name></code> to retrieve all the information of the matched paths.
Retrieve vertices in a path	<pre>MATCH p=(v:player{name:"Tim Duncan"})-[]->(v2) RETURN nodes(p)</pre>	Use the <code>nodes()</code> function to retrieve all vertices in a path.
Retrieve edges in a path	<pre>MATCH p=(v:player{name:"Tim Duncan"})-[]->(v2) RETURN relationships(p)</pre>	Use the <code>relationships()</code> function to retrieve all edges in a path.
Retrieve path length	<pre>MATCH p=(v:player{name:"Tim Duncan"})-[*..2]->(v2) RETURN p AS Paths, length(p) AS Length</pre>	Use the <code>length()</code> function to retrieve the length of a path.

• OPTIONAL MATCH

Pattern	Example	Description
Matches patterns against your graph database, just like <code>MATCH</code> does.	<pre>MATCH (m)-[]->(n) WHERE id(m)=="player100" OPTIONAL MATCH (n)-[]->(l) WHERE id(n)=="player125" RETURN id(m),id(n),id(l)</pre>	If no matches are found, <code>OPTIONAL MATCH</code> will use a null for missing parts of the pattern.

LOOKUP

```
LOOKUP ON {<vertex_tag> | <edge_type>}
[WHERE <expression> [AND <expression> ...]]
YIELD <return_list> [AS <alias>]
```

Pattern	Example	Description
Retrieve vertices	LOOKUP ON player WHERE player.name == "Tony Parker" YIELD player.name AS name, player.age AS age	The following example returns vertices whose name is Tony Parker and the tag is player.
Retrieve edges	LOOKUP ON follow WHERE follow.degree == 90 YIELD follow.degree	Returns edges whose degree is 90 and the edge type is follow.
List vertices with a tag	LOOKUP ON player	Shows how to retrieve the VID of all vertices tagged with player.
List edges with an edge types	LOOKUP ON like	Shows how to retrieve the source Vertex IDs, destination vertex IDs, and ranks of all edges of the like edge type.
Count the numbers of vertices or edges	LOOKUP ON player YIELD COUNT(*) AS Player_Number	Shows how to count the number of vertices tagged with player.
Count the numbers of edges	LOOKUP ON like YIELD COUNT(*) AS Like_Number	Shows how to count the number of edges of the like edge type.

GO

```
GO [[<M> TO] <N> STEPS ] FROM <vertex_list>
OVER <edge_type_list> [{REVERSELY | BIDIRECT}]
[ WHERE <conditions> ]
YIELD [DISTINCT] <return_list>
[ {SAMPLE <sample_list> | LIMIT <limit_list>} ]
[ | GROUP BY {col_name | expr | position} YIELD <col_name> ]
[ | ORDER BY <expression> [{ASC | DESC}] ]
[ | LIMIT [<offset_value>,] <number_rows> ]
```

Example	Description
GO FROM "player102" OVER serve YIELD dst(edge)	Returns the teams that player 102 serves.
GO 2 STEPS FROM "player102" OVER follow YIELD dst(edge)	Returns the friends of player 102 with 2 hops.
GO FROM "player100", "player102" OVER serve WHERE properties(edge).start_year > 1995 YIELD DISTINCT properties(\$\$).name AS team_name, properties(edge).start_year AS start_year, properties(\$^).name AS player_name	Adds a filter for the traversal.
GO FROM "player100" OVER follow, serve YIELD properties(edge).degree, properties(edge).start_year	The following example traverses along with multiple edge types. If there is no value for a property, the output is UNKNOWN_PROP .
GO FROM "player100" OVER follow REVERSELY YIELD src(edge) AS destination	The following example returns the neighbor vertices in the incoming direction of player 100.
GO FROM "player100" OVER follow REVERSELY YIELD src(edge) AS id GO FROM \$-.id OVER serve WHERE properties(\$^).age > 20 YIELD properties(\$^).name AS FriendOf, properties(\$\$).name AS Team	The following example retrieves the friends of player 100 and the teams that they serve.
GO FROM "player102" OVER follow YIELD dst(edge) AS both	The following example returns all the neighbor vertices of player 102.
GO 2 STEPS FROM "player100" OVER follow YIELD src(edge) AS src, dst(edge) AS dst, properties(\$\$).age AS age GROUP BY \$-.dst YIELD \$-.dst AS dst, collect_set(\$-.src) AS src, collect(\$-.age) AS age	The following example the outputs according to age.

FETCH

• Fetch vertex properties

```
FETCH PROP ON {<tag_name>[, tag_name ...] | *}
<vid> [, vid ...]
YIELD <return_list> [AS <alias>]
```

Example	Description
<pre>FETCH PROP ON player "player100" YIELD properties(vertex)</pre>	Specify a tag in the <code>FETCH</code> statement to fetch the vertex properties by that tag.
<pre>FETCH PROP ON player "player100" YIELD player.name AS name</pre>	Use a <code>YIELD</code> clause to specify the properties to be returned.
<pre>FETCH PROP ON player "player101", "player102", "player103" YIELD properties(vertex)</pre>	Specify multiple VIDs (vertex IDs) to fetch properties of multiple vertices. Separate the VIDs with commas.
<pre>FETCH PROP ON player, t1 "player100", "player103" YIELD properties(vertex)</pre>	Specify multiple tags in the <code>FETCH</code> statement to fetch the vertex properties by the tags. Separate the tags with commas.
<pre>FETCH PROP ON * "player100", "player106", "team200" YIELD properties(vertex)</pre>	Set an asterisk symbol <code>*</code> to fetch properties by all tags in the current graph space.

• Fetch edge properties

```
FETCH PROP ON <edge_type> <src_vid> -> <dst_vid>[@<rank>] [, <src_vid> -> <dst_vid> ...]
YIELD <output>;
```

Example	Description
<pre>FETCH PROP ON serve "player100" -> "team204" YIELD properties(edge)</pre>	The following statement fetches all the properties of the <code>serve</code> edge that connects vertex <code>"player100"</code> and vertex <code>"team204"</code> .
<pre>FETCH PROP ON serve "player100" -> "team204" YIELD serve.start_year</pre>	Use a <code>YIELD</code> clause to fetch specific properties of an edge.
<pre>FETCH PROP ON serve "player100" -> "team204", "player133" -> "team202" YIELD properties(edge)</pre>	Specify multiple edge patterns (<code><src_vid> -> <dst_vid>[@<rank>]</code>) to fetch properties of multiple edges. Separate the edge patterns with commas.
<pre>FETCH PROP ON serve "player100" -> "team204"@1 YIELD properties(edge)</pre>	To fetch on an edge whose rank is not 0, set its rank in the <code>FETCH</code> statement.
<pre>GO FROM "player101" OVER follow YIELD follow._src AS s, follow._dst AS d FETCH PROP ON follow \$-.s -> \$-.d YIELD follow.degree</pre>	The following statement returns the <code>degree</code> values of the <code>follow</code> edges that start from vertex <code>"player101"</code> .
<pre>\$var = GO FROM "player101" OVER follow YIELD follow._src AS s, follow._dst AS d; FETCH PROP ON follow \$var.s -> \$var.d YIELD follow.degree</pre>	You can use user-defined variables to construct similar queries.

SHOW

Statement	Syntax	Example	Description
SHOW CHARSET	SHOW CHARSET	SHOW CHARSET	Shows the available character sets.
SHOW COLLATION	SHOW COLLATION	SHOW COLLATION	Shows the collations supported by Nebula Graph.
SHOW CREATE SPACE	SHOW CREATE SPACE <space_name>	SHOW CREATE SPACE basketballplayer	Shows the creating statement of the specified graph space.
SHOW CREATE TAG/EDGE	SHOW CREATE {TAG <tag_name> EDGE <edge_name>}	SHOW CREATE TAG player	Shows the basic information of the specified tag.
SHOW HOSTS	SHOW HOSTS [GRAPH STORAGE META]	SHOW HOSTS SHOW HOSTS GRAPH	Shows the host and version information of Graph Service, Storage Service, and Meta Service.
SHOW INDEX STATUS	SHOW {TAG EDGE} INDEX STATUS	SHOW TAG INDEX STATUS	Shows the status of jobs that rebuild native indexes, which helps check whether a native index is successfully rebuilt or not.
SHOW INDEXES	SHOW {TAG EDGE} INDEXES	SHOW TAG INDEXES	Shows the names of existing native indexes.
SHOW PARTS	SHOW PARTS [<part_id>]	SHOW PARTS	Shows the information of a specified partition or all partitions in a graph space.
SHOW ROLES	SHOW ROLES IN <space_name>	SHOW ROLES in basketballplayer	Shows the roles that are assigned to a user account.
SHOW SNAPSHOTS	SHOW SNAPSHOTS	SHOW SNAPSHOTS	Shows the information of all the snapshots.
SHOW SPACES	SHOW SPACES	SHOW SPACES	Shows existing graph spaces in Nebula Graph.
SHOW STATS	SHOW STATS	SHOW STATS	Shows the statistics of the graph space collected by the latest STATS job.
SHOW TAGS/ EDGES	SHOW TAGS EDGES	SHOW TAGS SHOW EDGES	Shows all the tags in the current graph space.
SHOW USERS	SHOW USERS	SHOW USERS	Shows the user information.
SHOW SESSIONS	SHOW SESSIONS	SHOW SESSIONS	Shows the information of all the sessions.
SHOW SESSIONS	SHOW SESSION <Session_Id>	SHOW SESSION 1623304491050858	Shows a specified session with its ID.
SHOW QUERIES	SHOW [ALL] QUERIES	SHOW QUERIES	Shows the information of working queries in the current session.
SHOW META LEADER	SHOW META LEADER	SHOW META LEADER	Shows the information of the leader in the current Meta cluster.

3.6.3 Clauses and options

Clause	Syntax	Example	Description
GROUP BY	GROUP BY <var> YIELD <var>, <aggregation_function(var)>	GO FROM "player100" OVER follow BIDIRECT YIELD \$\$player.name as Name GROUP BY \$-.Name YIELD \$-.Name as Player, count(*) AS Name_Count	Finds all the vertices connected directly to vertex "player100", groups the result set by player names, and counts how many times the name shows up in the result set.
LIMIT	YIELD <var> [LIMIT [<offset_value>], <number_rows>]	GO FROM "player100" OVER follow REVERSELY YIELD \$\$player.name AS Friend, \$\$player.age AS Age ORDER BY \$-.Age, \$-.Friend LIMIT 1, 3	Returns the 3 rows of data starting from the second row of the sorted output.
SKIP	RETURN <var> [SKIP <offset>] [LIMIT <number_rows>]	MATCH (v:player{name:"Tim Duncan"}) --> (v2) RETURN v2.player.name AS Name, v2.player.age AS Age ORDER BY Age DESC SKIP 1	SKIP can be used alone to set the offset and return the data after the specified position.
SAMPLE	<go_statement> SAMPLE <sample_list>;	GO 3 STEPS FROM "player100" OVER * YIELD properties(\$ \$.name AS NAME, properties(\$ \$.age AS Age SAMPLE [1,2,3];	Takes samples evenly in the result set and returns the specified amount of data.
ORDER BY	<YIELD clause> ORDER BY <expression> [ASC DESC] [, <expression> [ASC DESC] ...]	FETCH PROP ON player "player100", "player101", "player102", "player103" YIELD player.age AS age, player.name AS name ORDER BY \$-.age ASC, \$-.name DESC	The ORDER BY clause specifies the order of the rows in the output.
RETURN	RETURN {<vertex_name> <edge_name> <vertex_name>.<property> <edge_name>.<property> ...}	MATCH (v:player) RETURN v.player.name, v.player.age LIMIT 3	Returns the first three rows with values of the vertex properties name and age.
TTL	CREATE TAG <tag_name>(<property_name_1> <property_value_1>, <property_name_2> <property_value_2>,...) ttl_duration= <value_int>, ttl_col = <property_name>	CREATE TAG t2(a int, b int, c string) ttl_duration= 100, ttl_col = "a"	Create a tag and set the TTL options.
WHERE	WHERE {<vertex edge_alias>.<property_name> {> == < ...} <value>...}	MATCH (v:player) WHERE v.player.name == "Tim Duncan" XOR (v.player.age < 30 AND v.player.name == "Yao Ming") OR NOT (v.player.name == "Yao Ming" OR v.player.name == "Tim Duncan") RETURN v.player.name, v.player.age	The WHERE clause filters the output by conditions. The WHERE clause usually works in Native nGQL GO and LOOKUP statements, and OpenCypher MATCH and WITH statements.
YIELD	YIELD [DISTINCT] <col> [AS <alias>] [, <col> [AS <alias>] ...] [WHERE <conditions>;]	GO FROM "player100" OVER follow YIELD dst(edge) AS ID FETCH PROP ON player \$-.ID YIELD player.age AS Age YIELD AVG(\$-.Age) as Avg_age, count(*)as Num_friends	Finds the players that "player100" follows and calculates their average age.

Clause	Syntax	Example	Description
WITH	<code>MATCH \$expressions WITH {nodes() labels() ...}</code>	<code>MATCH p=(v:player{name:"Tim Duncan"})--() WITH nodes(p) AS n UNWIND n AS n1 RETURN DISTINCT n1</code>	The WITH clause can retrieve the output from a query part, process it, and pass it to the next query part as the input.
UNWIND	<code>UNWIND <list> AS <alias> <RETURN clause></code>	<code>UNWIND [1,2,3] AS n RETURN n</code>	Splits a list into rows.

3.6.4 Space statements

Statement	Syntax	Example	Description
CREATE SPACE	<code>CREATE SPACE [IF NOT EXISTS] <graph_space_name> ([partition_num = <partition_number>,) [replica_factor = <replica_number>,) vid_type = {FIXED_STRING(<N>) INT[64]}) [COMMENT = '<comment>']</code>	<code>CREATE SPACE my_space_1 (vid_type=FIXED_STRING(30))</code>	Creates a graph space with
CREATE SPACE	<code>CREATE SPACE <new_graph_space_name> AS <old_graph_space_name></code>	<code>CREATE SPACE my_space_4 as my_space_3</code>	Clone a graph space.
USE	<code>USE <graph_space_name></code>	<code>USE space1</code>	Specifies a graph space as the current working graph space for subsequent queries.
SHOW SPACES	<code>SHOW SPACES</code>	<code>SHOW SPACES</code>	Lists all the graph spaces in the Nebula Graph examples.
DESCRIBE SPACE	<code>DESC[RIBE] SPACE <graph_space_name></code>	<code>DESCRIBE SPACE basketballplayer</code>	Returns the information about the specified graph space. 
DROP SPACE	<code>DROP SPACE [IF EXISTS] <graph_space_name></code>	<code>DROP SPACE basketballplayer</code>	Deletes everything in the specified graph space.

3.6.5 TAG statements

Statement	Syntax	Example	Description
CREATE TAG	<pre>CREATE TAG [IF NOT EXISTS] <tag_name> ((<prop_name> <data_type> [NULL NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']) [{, <prop_name> <data_type> [NULL NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']} ...]) [TTL_DURATION = <ttl_duration>] [TTL_COL = <prop_name>] [COMMENT = '<comment>']</pre>	<pre>CREATE TAG woman(name string, age int, married bool, salary double, create_time timestamp) TTL_DURATION = 100, TTL_COL = "create_time"</pre>	Creates a tag with the given name in a graph space.
DROP TAG	<pre>DROP TAG [IF EXISTS] <tag_name></pre>	<pre>CREATE TAG test(p1 string, p2 int)</pre>	Drops a tag with the given name in the current working graph space.
ALTER TAG	<pre>ALTER TAG <tag_name> <alter_definition> [, alter_definition] ... [ttl_definition [, ttl_definition] ...] [COMMENT = '<comment>']</pre>	<pre>ALTER TAG t1 ADD (p3 int, p4 string)</pre>	Alters the structure of a tag with the given name in a graph space. You can add or drop properties, and change the data type of an existing property. You can also set a TTL (Time-To-Live) on a property, or change its TTL duration.
SHOW TAGS	<pre>SHOW TAGS</pre>	<pre>SHOW TAGS</pre>	Shows the name of all tags in the current graph space.
DESCRIBE TAG	<pre>DESC[RIBE] TAG <tag_name></pre>	<pre>DESCRIBE TAG player</pre>	Returns the information about a tag with the given name in a graph space, such as field names, data type, and so on.
DELETE TAG	<pre>DELETE TAG <tag_name_list> FROM <VID></pre>	<pre>DELETE TAG test1 FROM "test"</pre>	Deletes a tag with the given name on a specified vertex.

3.6.6 Edge type statements

Statement	Syntax	Example	Description
CREATE EDGE	CREATE EDGE [IF NOT EXISTS] <edge_type_name> ((<prop_name> <data_type> [NULL NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>'] [{, <prop_name> <data_type> [NULL NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']} ...]) [TTL_DURATION = <ttl_duration>] [TTL_COL = <prop_name>] [COMMENT = '<comment>']	CREATE EDGE e1(p1 string, p2 int, p3 timestamp) TTL_DURATION = 100, TTL_COL = "p2"	Creates an edge type with the given name in a graph space. type
DROP EDGE	DROP EDGE [IF EXISTS] <edge_type_name>	DROP EDGE e1	Drops an edge type with the given name in a graph space.
ALTER EDGE	ALTER EDGE <edge_type_name> <alter_definition> [, alter_definition] ...] [ttl_definition [, ttl_definition] ...] [COMMENT = '<comment>']	ALTER EDGE e1 ADD (p3 int, p4 string)	Alters the structure of an edge type with the given name in a graph space.
SHOW EDGES	SHOW EDGES	SHOW EDGES	Shows all edge types in the current graph space.
DESCRIBE EDGE	DESC[RIBE] EDGE <edge_type_name>	DESCRIBE EDGE follow	Returns the information about an edge type with the given name in a graph space, such as field names, data type, and so on.

3.6.7 Vertex statements

Statement	Syntax	Example	Description
INSERT VERTEX	INSERT VERTEX [IF NOT EXISTS] [tag_props, [tag_props] ...] VALUES <vid>: ([prop_value_list])	INSERT VERTEX t2 (name, age) VALUES "13":("n3", 12), "14":("n4", 8)	Inserts one or more vertices into a graph space in Nebula Graph.
DELETE VERTEX	DELETE VERTEX <vid> [, <vid> ...]	DELETE VERTEX "team1"	Deletes vertices and the related incoming and outgoing edges of the vertices.
UPDATE VERTEX	UPDATE VERTEX ON <tag_name> <vid> SET <update_prop> [WHEN <condition>] [YIELD <output>]	UPDATE VERTEX ON player "player101" SET age = age + 2	Updates properties on tags of a vertex.
UPSERT VERTEX	UPSERT VERTEX ON <tag> <vid> SET <update_prop> [WHEN <condition>] [YIELD <output>]	UPSERT VERTEX ON player "player667" SET age = 31	The UPSERT statement is a combination of UPDATE and INSERT. You can use UPSERT VERTEX to update the properties of a vertex if it exists or insert a new vertex if it does not exist.

3.6.8 Edge statements

Statement	Syntax	Example	Description
INSERT EDGE	<pre>INSERT EDGE [IF NOT EXISTS] <edge_type> (<prop_name_list>) VALUES <src_vid> -> <dst_vid>[@<rank>] : (<prop_value_list>) [, <src_vid> -> <dst_vid>[@<rank>] : (<prop_value_list>), ...]</pre>	<pre>INSERT EDGE e2 (name, age) VALUES "11"->"13":("n1", 1)</pre>	Inserts an edge or multiple edges into a graph space from a source vertex (given by <code>src_vid</code>) to a destination vertex (given by <code>dst_vid</code>) with a specific rank in Nebula Graph.
DELETE EDGE	<pre>DELETE EDGE <edge_type> <src_vid> -> <dst_vid>[@<rank>] [, <src_vid> -> <dst_vid>[@<rank>] ...]</pre>	<pre>DELETE EDGE serve "player100" -> "team204"@0</pre>	Deletes one edge or multiple edges at a time.
UPDATE EDGE	<pre>UPDATE EDGE ON <edge_type> <src_vid> -> <dst_vid> [@<rank>] SET <update_prop> [WHEN <condition>] [YIELD <output>]</pre>	<pre>UPDATE EDGE ON serve "player100" - > "team204"@0 SET start_year = start_year + 1</pre>	Updates properties on an edge.
UPSERT EDGE	<pre>UPSERT EDGE ON <edge_type> <src_vid> -> <dst_vid> [@rank] SET <update_prop> [WHEN <condition>] [YIELD <properties>]</pre>	<pre>UPSERT EDGE on serve "player666" - > "team200"@0 SET end_year = 2021</pre>	The <code>UPSERT</code> statement is a combination of <code>UPDATE</code> and <code>INSERT</code> . You can use <code>UPSERT</code> <code>EDGE</code> to update the properties of an edge if it exists or insert a new edge if it does not exist.

3.6.9 Index

- Native index

You can use native indexes together with `LOOKUP` and `MATCH` statements.

Statement	Syntax	Example	Description
<code>CREATE INDEX</code>	<code>CREATE {TAG EDGE} INDEX [IF NOT EXISTS] <index_name> ON {<tag_name> <edge_name>} ([<prop_name_list>]) [COMMENT = '<comment>']</code>	<code>CREATE TAG INDEX player_index on player()</code>	Add native indexes for the existing tags, edge types, or properties.
<code>SHOW CREATE INDEX</code>	<code>SHOW CREATE {TAG EDGE} INDEX <index_name></code>	<code>show create tag index index_2</code>	Shows the statement used when creating a tag or an edge type. It contains detailed information about the index, such as its associated properties.
<code>SHOW INDEXES</code>	<code>SHOW {TAG EDGE} INDEXES</code>	<code>SHOW TAG INDEXES</code>	Shows the defined tag or edge type indexes names in the current graph space.
<code>DESCRIBE INDEX</code>	<code>DESCRIBE {TAG EDGE} INDEX <index_name></code>	<code>DESCRIBE TAG INDEX player_index_0</code>	Gets the information about the index with a given name, including the property name (Field) and the property type (Type) of the index.
<code>REBUILD INDEX</code>	<code>REBUILD {TAG EDGE} INDEX [<index_name_list>]</code>	<code>REBUILD TAG INDEX single_person_index</code>	Rebuilds the created tag or edge type index. If data is updated or inserted before the creation of the index, you must rebuild the indexes manually to make sure that the indexes contain the previously added data.
<code>SHOW INDEX STATUS</code>	<code>SHOW {TAG EDGE} INDEX STATUS</code>	<code>SHOW TAG INDEX STATUS</code>	Returns the name of the created tag or edge type index and its status.
<code>DROP INDEX</code>	<code>DROP {TAG EDGE} INDEX [IF EXISTS] <index_name></code>	<code>DROP TAG INDEX player_index_0</code>	Removes an existing index from the current graph space.

Full-text index

Syntax	Example	Description
<code>SIGN IN TEXT SERVICE [(<elastic_ip:port> [,<username>, <password>]), (<elastic_ip:port>), ...]</code>	<code>SIGN IN TEXT SERVICE (127.0.0.1:9200)</code>	The full-text indexes is implemented based on Elasticsearch . After deploying an Elasticsearch cluster, you can use the <code>SIGN IN</code> statement to log in to the Elasticsearch client.
<code>SHOW TEXT SEARCH CLIENTS</code>	<code>SHOW TEXT SEARCH CLIENTS</code>	Shows text search clients.
<code>SIGN OUT TEXT SERVICE</code>	<code>SIGN OUT TEXT SERVICE</code>	Signs out to the text search clients.
<code>CREATE FULLTEXT {TAG EDGE} INDEX <index_name> ON {<tag_name> <edge_name>} ([<prop_name_list>])</code>	<code>CREATE FULLTEXT TAG INDEX nebula_index_1 ON player(name)</code>	Creates full-text indexes.
<code>SHOW FULLTEXT INDEXES</code>	<code>SHOW FULLTEXT INDEXES</code>	Show full-text indexes.
<code>REBUILD FULLTEXT INDEX</code>	<code>REBUILD FULLTEXT INDEX</code>	Rebuild full-text indexes.
<code>DROP FULLTEXT INDEX <index_name></code>	<code>DROP FULLTEXT INDEX nebula_index_1</code>	Drop full-text indexes.
<code>LOOKUP ON {<tag> <edge_type>} WHERE <expression> [YIELD <return_list>]</code>	<code>LOOKUP ON player WHERE FUZZY(player.name, "Tim Dunnican", AUTO, OR) YIELD player.name</code>	Use query options.

3.6.10 Subgraph and path statements

Type	Syntax	Example	Description
GET SUBGRAPH	<code>GET SUBGRAPH [WITH PROP] [<step_count> STEPS] FROM {<vid>, <vid>...} [{IN OUT BOTH} <edge_type>, <edge_type>...] YIELD [VERTICES AS <vertex_alias>] [, EDGES AS <edge_alias>]</code>	<code>GET SUBGRAPH 1 STEPS FROM "player100" YIELD VERTICES AS nodes, EDGES AS relationships</code>	Retrieves information of vertices and edges reachable from the source vertices of the specified edge types and returns information of the subgraph.
FIND PATH	<code>FIND { SHORTEST ALL NOLOOP } PATH [WITH PROP] FROM <vertex_id_list> TO <vertex_id_list> OVER <edge_type_list> [REVERSELY BIDIRECT] [<WHERE clause>] [UPTO <N> STEPS] YIELD path as <alias> [ORDER BY \$-.path] [LIMIT <M>]</code>	<code>FIND SHORTEST PATH FROM "player102" TO "team204" OVER * YIELD path as p</code>	Finds the paths between the selected source vertices and destination vertices. A returned path is like (<vertex_id>)- [: <edge_type_name> @ <rank>]- >(<vertex_id>).

3.6.11 Query tuning statements

Type	Syntax	Example	Description
EXPLAIN	EXPLAIN [format="row" "dot"] <your_nGQL_statement>	EXPLAIN format="row" SHOW TAGS EXPLAIN format="dot" SHOW TAGS	Helps output the execution plan of an nGQL statement without executing the statement.
PROFILE	PROFILE [format="row" "dot"] <your_nGQL_statement>	PROFILE format="row" SHOW TAGS EXPLAIN format="dot" SHOW TAGS	Executes the statement, then outputs the execution plan as well as the execution profile.

3.6.12 Operation and maintenance statements

• BALANCE

Syntax	Description
BALANCE LEADER	Starts a job to balance the distribution of storage leaders in the current graph space. It returns the job ID.

• Job statements

Syntax	Description
SUBMIT JOB COMPACT	Triggers the long-term RocksDB compact operation.
SUBMIT JOB FLUSH	Writes the RocksDB memfile in the memory to the hard disk.
SUBMIT JOB STATS	Starts a job that makes the statistics of the current graph space. Once this job succeeds, you can use the SHOW STATS statement to list the statistics.
SHOW JOB <job_id>	Shows the information about a specific job and all its tasks in the current graph space. The Meta Service parses a SUBMIT JOB request into multiple tasks and assigns them to the nebula-storaged processes.
SHOW JOBS	Lists all the unexpired jobs in the current graph space.
STOP JOB	Stops jobs that are not finished in the current graph space.
RECOVER JOB	Re-executes the failed jobs in the current graph space and returns the number of recovered jobs.

• Kill queries

Syntax	Example	Description
KILL QUERY (session=<session_id>, plan=<plan_id>)	KILL QUERY(SESSION=1625553545984255, PLAN=163)	Terminates the query being executed, and is often used to terminate slow queries.

Last update: February 8, 2022

4. nGQL guide

4.1 nGQL overview

4.1.1 Nebula Graph Query Language (nGQL)

This topic gives an introduction to the query language of Nebula Graph, nGQL.

What is nGQL

nGQL is a declarative graph query language for Nebula Graph. It allows expressive and efficient **graph patterns**. nGQL is designed for both developers and operations professionals. nGQL is an SQL-like query language, so it's easy to learn.

nGQL is a project in progress. New features and optimizations are done steadily. There can be differences between syntax and implementation. Submit an **issue** to inform the Nebula Graph team if you find a new issue of this type. Nebula Graph 2.0 or later releases will support **openCypher 9**.

What can nGQL do

- Supports graph traversals
- Supports pattern match
- Supports aggregation
- Supports graph mutation
- Supports access control
- Supports composite queries
- Supports index
- Supports most openCypher 9 graph query syntax (but mutations and controls syntax are not supported)

Example data Basketballplayer

Users can download the example data **Basketballplayer** in Nebula Graph. After downloading the example data, you can import it to Nebula Graph by using the `-f` option in **Nebula Graph Console**.

Placeholder identifiers and values

Refer to the following standards in nGQL:

- (Draft) ISO/IEC JTC1 N14279 SC 32 - Database_Languages - GQL
- (Draft) ISO/IEC JTC1 SC32 N3228 - SQL_Property_Graph_Queries - SQLPGQ
- OpenCypher 9

In template code, any token that is not a keyword, a literal value, or punctuation is a placeholder identifier or a placeholder value.

For details of the symbols in nGQL syntax, see the following table:

Token	Meaning
< >	name of a syntactic element
:	formula that defines an element
[]	optional elements
{ }	explicitly specified elements
	complete alternative elements
...	may be repeated any number of times

For example, create vertices in nGQL syntax:

```
INSERT VERTEX [IF NOT EXISTS] [tag_props, [tag_props] ...]
VALUES <vid>: ([prop_value_list])
tag_props:
  tag_name ([prop_name_list])
prop_name_list:
  [prop_name [, prop_name] ...]
prop_value_list:
  [prop_value [, prop_value] ...]
```

Example statement:

```
nebula> CREATE TAG IF NOT EXISTS player(name string, age int);
```

About openCypher compatibility

NATIVE NGQL AND OPENCYPHER

Native nGQL is the part of a graph query language designed and implemented by Nebula Graph. OpenCypher is a graph query language maintained by openCypher Implementers Group.

The latest release is openCypher 9. The compatible parts of openCypher in nGQL are called openCypher compatible sentences (short as openCypher).

Note

```
nGQL = native nGQL + openCypher compatible sentences
```

Undefined behavior

Do not put together `native nGQL` and `openCypher compatible sentences` in one composite statement because this behavior is undefined.

IS NGQL COMPATIBLE WITH OPENCYPHER 9 COMPLETELY?

NO.

nGQL is partially compatible with DQL in openCypher 9

nGQL is designed to be compatible with part of DQL (match) and is not planned to be compatible with any DDL, DML, or DCL.

Multiple known incompatible items are listed in [Nebula Graph Issues](#). Submit an issue with the `incompatible` tag if you find a new issue of this type. Users can search in this manual with the keyword `compatibility` to find major compatibility issues.

WHAT ARE THE MAJOR DIFFERENCES BETWEEN NGQL AND OPENCYPHER 9?

The following are some major differences (by design incompatible) between nGQL and openCypher.

Category	openCypher 9	nGQL
Schema	Optional Schema	Strong Schema
Equality operator	=	==
Math exponentiation	^	^ is not supported. Use pow(x, y) instead.
Edge rank	No such concept.	edge rank (reference by @)
Statement	-	All DMLs (CREATE , MERGE , etc) of openCypher 9.
Label and tag	A label is used for searching a vertex, namely an index of vertex.	A tag defines the type of a vertex and its corresponding properties. It cannot be used as an index.
Pre-compiling and parameterized queries	Support	Parameterized queries are supported, but precompiling is not.

Compatibility

OpenCypher 9 and Cypher have some differences in grammar and licence. For example,

1. Cypher requires that **All Cypher statements are explicitly run within a transaction**. While openCypher has no such requirement. And nGQL does not support transactions.
2. Cypher has a variety of constraints, including Unique node property constraints, Node property existence constraints, Relationship property existence constraints, and Node key constraints. While OpenCypher has no such constraints. As a strong schema system, most of the constraints mentioned above can be solved through schema definitions (including NOT NULL) in nGQL. The only function that cannot be supported is the UNIQUE constraint.
3. Cypher has APoC, while openCypher 9 does not have APoC. Cypher has Blot protocol support requirements, while openCypher 9 does not.

WHERE CAN I FIND MORE NGQL EXAMPLES?

Users can find more than 2500 nGQL examples in the [features](#) directory on the Nebula Graph GitHub page.

The [features](#) directory consists of `.feature` files. Each file records scenarios that you can use as nGQL examples. Here is an example:

```
Feature: Basic match

Background:
  Given a graph with space named "basketballplayer"

Scenario: Single node
  When executing query:
    """
    MATCH (v:player {name: "Yao Ming"}) RETURN v;
    """
  Then the result should be, in any order, with relax comparison:
    | v |
    | ("player133" :player{age: 38, name: "Yao Ming"}) |

Scenario: One step
  When executing query:
    """
    MATCH (v1:player{name: "LeBron James"}) -[r]-> (v2)
    RETURN type(r) AS Type, v2.player.name AS Name
    """
  Then the result should be, in any order:
    | Type | Name |
    | "follow" | "Ray Allen" |
    | "serve" | "Lakers" |
    | "serve" | "Heat" |
    | "serve" | "Cavaliers" |

Feature: Comparison of where clause
```

```

Background:
  Given a graph with space named "basketballplayer"

Scenario: push edge props filter down
  When profiling query:
    """
    GO FROM "player100" OVER follow
    WHERE properties(edge).degree IN [v IN [95,99] WHERE v > 0]
    YIELD dst(edge), properties(edge).degree
    """
  Then the result should be, in any order:
    | follow._dst | follow.degree |
    | "player101" | 95            |
    | "player125" | 95            |
  And the execution plan should be:
    | id | name      | dependencies | operator info |
    | 0  | Project   | 1            |                |
    | 1  | GetNeighbors | 2            | {"filter": "(properties(edge).degree IN [v IN [95,99] WHERE (v>0)])"} |
    | 2  | Start     |              |                |

```

The keywords in the preceding example are described as follows.

Keyword	Description
Feature	Describes the topic of the current <code>.feature</code> file.
Background	Describes the background information of the current <code>.feature</code> file.
Given	Describes the prerequisites of running the test statements in the current <code>.feature</code> file.
Scenario	Describes the scenarios. If there is the <code>@skip</code> before one <code>Scenario</code> , this scenario may not work and do not use it as a working example in a production environment.
When	Describes the nGQL statement to be executed. It can be a <code>executing query</code> or <code>profiling query</code> .
Then	Describes the expected return results of running the statement in the <code>When</code> clause. If the return results in your environment do not match the results described in the <code>.feature</code> file, submit an issue to inform the Nebula Graph team.
And	Describes the side effects of running the statement in the <code>When</code> clause.
@skip	This test case will be skipped. Commonly, the to-be-tested code is not ready.

Welcome to [add more tick case](#) and return automatically to the using statements in CI/CD.

DOES IT SUPPORT TINKERPOP GREMLIN?

No. And no plan to support that.

DOES NEBULA GRAPH SUPPORT W3C RDF (SPARQL) OR GRAPHQL?

No. And no plan to support that.

The data model of Nebula Graph is the property graph. And as a strong schema system, Nebula Graph does not support RDF.

Nebula Graph Query Language does not support `SPARQL` nor `GraphQL`.

Last update: February 8, 2022

4.1.2 Patterns

Patterns and graph pattern matching are the very heart of a graph query language. This topic will describe the patterns in Nebula Graph, some of which have not yet been implemented.

Patterns for vertices

A vertex is described using a pair of parentheses and is typically given a name. For example:

```
(a)
```

This simple pattern describes a single vertex and names that vertex using the variable `a`.

Patterns for related vertices

A more powerful construct is a pattern that describes multiple vertices and edges between them. Patterns describe an edge by employing an arrow between two vertices. For example:

```
(a)-[]->(b)
```

This pattern describes a very simple data structure: two vertices and a single edge from one to the other. In this example, the two vertices are named as `a` and `b` respectively and the edge is `directed`: it goes from `a` to `b`.

This manner of describing vertices and edges can be extended to cover an arbitrary number of vertices and the edges between them, for example:

```
(a)-[]->(b)<-[]-(c)
```

Such a series of connected vertices and edges is called a `path`.

Note that the naming of the vertices in these patterns is only necessary when one needs to refer to the same vertex again, either later in the pattern or elsewhere in the query. If not, the name may be omitted as follows:

```
(a)-[]->()<-[]-(c)
```

Patterns for tags

Note

The concept of `tag` in nGQL has a few differences from that of `label` in openCypher. For example, users must create a `tag` before using it. And a `tag` also defines the type of properties.

In addition to simply describing the vertices in the graphs, patterns can also describe the tags of the vertices. For example:

```
(a:User)-[]->(b)
```

Patterns can also describe a vertex that has multiple tags. For example:

```
(a:User:Admin)-[]->(b)
```

Patterns for properties

Vertices and edges are the fundamental elements in a graph. In nGQL, properties are added to them for richer models.

In the patterns, the properties can be expressed as follows: some key-value pairs are enclosed in curly brackets and separated by commas. For example, a vertex with two properties will be like:

```
(a {name: 'Andres', sport: 'Brazilian Ju-Jitsu'})
```

One of the edges that connect to this vertex can be like:

```
(a)-[{blocked: false}]->(b)
```

Patterns for edges

The simplest way to describe an edge is by using the arrow between two vertices, as in the previous examples.

Users can describe an edge and its direction using the following statement. If users do not care about its direction, the arrowhead can be omitted. For example:

```
(a)-[]-(b)
```

Like vertices, edges can also be named. A pair of square brackets will be used to separate the arrow and the variable will be placed between them. For example:

```
(a)-[r]->(b)
```

Like the tags on vertices, edges can also have types. To describe an edge with a specific type, use the pattern as follows:

```
(a)-[r:REL_TYPE]->(b)
```

An edge can only have one edge type. But if we'd like to describe some data such that the edge could have a set of types, then they can all be listed in the pattern, separating them with the pipe symbol `|` like this:

```
(a)-[r:TYPE1|TYPE2]->(b)
```

Like vertices, the name of an edge can be omitted. For example:

```
(a)-[:REL_TYPE]->(b)
```

Variable-length pattern

Rather than describing a long path using a sequence of many vertex and edge descriptions in a pattern, many edges (and the intermediate vertices) can be described by specifying a length in the edge description of a pattern. For example:

```
(a)-[*2]->(b)
```

The following pattern describes a graph of three vertices and two edges, all in one path (a path of length 2). It is equivalent to:

```
(a)-[]->()-[]->(b)
```

The range of lengths can also be specified. Such edge patterns are called `variable-length edges`. For example:

```
(a)-[*3..5]->(b)
```

The preceding example defines a path with a minimum length of 3 and a maximum length of 5.

It describes a graph of either 4 vertices and 3 edges, 5 vertices and 4 edges, or 6 vertices and 5 edges, all connected in a single path.

The lower bound can be omitted. For example, to describe paths of length 5 or less, use:

```
(a)-[*..5]->(b)
```

Note

The upper bound must be specified. The following are **NOT** accepted.

```
(a)-[*3..]->(b)
(a)-[*]->(b)
```

Assigning to path variables

As described above, a series of connected vertices and edges is called a `path`. nGQL allows paths to be named using variables. For example:

```
p = (a)-[*3..5]->(b)
```

Users can do this in the `MATCH` statement.

Last update: January 14, 2022

4.1.3 Comments

This topic will describe the comments in nGQL.

Legacy version compatibility

- In Nebula Graph 1.x, there are four comment styles: `#`, `--`, `//`, `/* */`.
- Since Nebula Graph 2.x, `--` cannot be used as comments.

Examples

```
nebula> # Do nothing in this line
nebula> RETURN 1+1;    # This comment continues to the end of this line.
nebula> RETURN 1+1;    // This comment continues to the end of this line.
nebula> RETURN 1 /* This is an in-line comment. */ + 1 == 2;
nebula> RETURN 11 +    \
/* Multi-line comment.    \
Use a backslash as a line break.  \
*/ 12;
```

In nGQL statement, the backslash `\` in a line indicates a line break.

OpenCypher compatibility

- In nGQL, you must add a `\` at the end of every line, even in multi-line comments `/* */`.
- In openCypher, there is no need to use a `\` as a line break.

```
/* openCypher style:
The following comment
spans more than
one line */
MATCH (n:label)
RETURN n;
```

```
/* nGQL style: \
The following comment    \
spans more than          \
one line */              \
MATCH (n:tag) \
RETURN n;
```

Last update: February 8, 2022

4.1.4 Identifier case sensitivity

Identifiers are Case-Sensitive

The following statements will not work because they refer to two different spaces, i.e. `my_space` and `MY_SPACE`.

```
nebula> CREATE SPACE IF NOT EXISTS my_space (vid_type=FIXED_STRING(30));
nebula> use MY_SPACE;
[ERROR (-8)]: SpaceNotFound:
```

Keywords and Reserved Words are Case-Insensitive

The following statements are equivalent since `show` and `spaces` are keywords.

```
nebula> show spaces;
nebula> SHOW SPACES;
nebula> SHOW spaces;
nebula> show SPACES;
```

Functions are Case-Insensitive

Functions are case-insensitive. For example, `count()`, `COUNT()`, and `count()` are equivalent.

```
nebula> WITH [NULL, 1, 1, 2, 2] As a \
UNWIND a AS b \
RETURN count(b), COUNT(*), count(DISTINCT b);
+-----+-----+-----+
| count(b) | COUNT(*) | count(distinct b) |
+-----+-----+-----+
| 4        | 5        | 2                  |
+-----+-----+-----+
```

Last update: January 14, 2022

4.1.5 Keywords

Keywords have significance in nGQL. It can be classified into reserved keywords and non-reserved keywords.

Non-reserved keywords are permitted as identifiers without quoting. To use special characters or reserved keywords as identifiers, quote them with backticks such as `AND`.

Note

Keywords are case-insensitive.

```
nebula> CREATE TAG TAG(name string);
[ERROR (-7)]: SyntaxError: syntax error near `TAG`

nebula> CREATE TAG `TAG` (name string);
Execution succeeded

nebula> CREATE TAG SPACE(name string);
Execution succeeded

nebula> CREATE TAG 空间(空间 string);
Execution succeeded

nebula> CREATE TAG `特殊字符&*+*/`(`q-特殊= wer` string);
Execution succeeded
```

Reserved keywords

```
ACROSS
ADD
ALTER
AND
AS
ASC
ASCENDING
BALANCE
BOOL
BY
CASE
CHANGE
COMPACT
CREATE
DATE
DATETIME
DELETE
DESC
DESCENDING
DESCRIBE
DISTINCT
DOUBLE
DOWNLOAD
DROP
EDGE
EDGES
EXISTS
EXPLAIN
FETCH
FIND
FIXED_STRING
FLOAT
FLUSH
FORMAT
FROM
GET
GO
GRANT
IF
IGNORE_EXISTED_INDEX
IN
INDEX
INDEXES
INGEST
INSERT
INT
INT16
INT32
INT64
INT8
INTERSECT
IS
LIMIT
LIST
```

LOOKUP
MAP
MATCH
MINUS
NO
NOT
NOT_IN
NULL
OF
OFFSET
ON
OR
ORDER
OVER
OVERWRITE
PROFILE
PROP
REBUILD
RECOVER
REMOVE
RETURN
REVERSELY
REVOKE
SET
SHOW
STEP
STEPS
STOP
STRING
SUBMIT
TAG
TAGS
TIME
TIMESTAMP
TO
UNION
UPDATE
UPSERT
UPTO
USE
VERTEX
VERTICES
WHEN
WHERE
WITH
XOR
YIELD

Non-reserved keywords

ACCOUNT
ADMIN
ALL
ANY
ATOMIC_EDGE
AUTO
BIDIRECT
BOTH
CHARSET
CLIENTS
COLLATE
COLLATION
COMMENT
CONFIGS
CONTAINS
DATA
DBA
DEFAULT
ELASTICSEARCH
ELSE
END
ENDS
ENDS_WITH
FORCE
FULLTEXT
FUZZY
GOD
GRAPH
GROUP
GROUPS
GUEST
HDFS
HOST
HOSTS
INTO
IS_EMPTY
IS_NOT_EMPTY
IS_NOT_NULL
IS_NULL
JOB
JOBS

KILL
LEADER
LISTENER
META
NOLOOP
NONE
NOT_CONTAINS
NOT_ENDS_WITH
NOT_STARTS_WITH
OPTIONAL
OUT
PART
PARTITION_NUM
PARTS
PASSWORD
PATH
PLAN
PREFIX
QUERIES
QUERY
REDUCE
REGEXP
REPLICA_FACTOR
RESET
ROLE
ROLES
SAMPLE
SEARCH
SERVICE
SESSION
SESSIONS
SHORTEST
SIGN
SINGLE
SKIP
SNAPSHOT
SNAPSHOTS
SPACE
SPACES
STARTS
STARTS_WITH
STATS
STATUS
STORAGE
SUBGRAPH
TEXT
TEXT_SEARCH
THEN
TOP
TTL_COL
TTL_DURATION
UNWIND
USER
USERS
UUID
VALUE
VALUES
VID_TYPE
WILDCARD
ZONE
ZONES
FALSE
TRUE

Last update: January 14, 2022

4.1.6 nGQL style guide

nGQL does not have strict formatting requirements, but creating nGQL statements according to an appropriate and uniform style can improve readability and avoid ambiguity. Using the same nGQL style in the same organization or project helps reduce maintenance costs and avoid problems caused by format confusion or misunderstanding. This topic will provide a style guide for writing nGQL statements.

Compatibility

The styles of nGQL and [Cypher Style Guide](#) are different.

Newline

1. Start a new line to write a clause.

Not recommended:

```
GO FROM "player100" OVER follow REVERSELY YIELD src(edge) AS id;
```

Recommended:

```
GO FROM "player100" \
OVER follow REVERSELY \
YIELD src(edge) AS id;
```

2. Start a new line to write different statements in a composite statement.

Not recommended:

```
GO FROM "player100" OVER follow REVERSELY YIELD src(edge) AS id | GO FROM $-.id \
OVER serve WHERE properties($^).age > 20 YIELD properties($^).name AS FriendOf, properties($$).name AS Team;
```

Recommended:

```
GO FROM "player100" \
OVER follow REVERSELY \
YIELD src(edge) AS id | \
GO FROM $-.id OVER serve \
WHERE properties($^).age > 20 \
YIELD properties($^).name AS FriendOf, properties($$).name AS Team;
```

3. If the clause exceeds 80 characters, start a new line at the appropriate place.

Not recommended:

```
MATCH (v:player{name:"Tim Duncan"})-[e]->(v2) \
WHERE (v2.player.name STARTS WITH "Y" AND v2.player.age > 35 AND v2.player.age < v.player.age) OR (v2.player.name STARTS WITH "T" AND v2.player.age < 45 AND
v2.player.age > v.player.age) \
RETURN v2;
```

Recommended:

```
MATCH (v:player{name:"Tim Duncan"})-[e]->(v2) \
WHERE (v2.player.name STARTS WITH "Y" AND v2.player.age > 35 AND v2.player.age < v.player.age) \
OR (v2.player.name STARTS WITH "T" AND v2.player.age < 45 AND v2.player.age > v.player.age) \
RETURN v2;
```

Note

If needed, you can also start a new line for better understanding, even if the clause does not exceed 80 characters.

Identifier naming

In nGQL statements, characters other than keywords, punctuation marks, and blanks are all identifiers. Recommended methods to name the identifiers are as follows.

1. Use singular nouns to name tags, and use the base form of verbs or verb phrases to form Edge types.

Not recommended:

```
MATCH p=(v:players)-[e:are_following]-(v2) \
RETURN nodes(p);
```

Recommended:

```
MATCH p=(v:player)-[e:follow]-(v2) \
RETURN nodes(p);
```

2. Use the snake case to name identifiers, and connect words with underscores (_) with all the letters lowercase.

Not recommended:

```
MATCH (v:basketballTeam) \
RETURN v;
```

Recommended:

```
MATCH (v:basketball_team) \
RETURN v;
```

3. Use uppercase keywords and lowercase variables.

Not recommended:

```
go from "player100" over Follow
```

Recommended:

```
GO FROM "player100" OVER follow
```

Pattern

1. Start a new line on the right side of the arrow indicating an edge when writing patterns.

Not recommended:

```
MATCH (v:player{name: "Tim Duncan", age: 42}) \
-[e:follow]->()-[e:serve]->()<--(v2) \
RETURN v, e, v2;
```

Recommended:

```
MATCH (v:player{name: "Tim Duncan", age: 42})-[e:follow]-> \
()-[e:serve]->()<--(v2) \
RETURN v, e, v2;
```

2. Anonymize the vertices and edges that do not need to be queried.

Not recommended:

```
MATCH (v:player)-[e:follow]->(v2) \
RETURN v;
```

Recommended:

```
MATCH (v:player)-[:follow]->() \
RETURN v;
```

- Place named vertices in front of anonymous vertices.

Not recommended:

```
MATCH ()-[:follow]->(v) \
RETURN v;
```

Recommended:

```
MATCH (v)-[:follow]-() \
RETURN v;
```

String

The strings should be surrounded by double quotes.

Not recommended:

```
RETURN 'Hello Nebula!';
```

Recommended:

```
RETURN "Hello Nebula!\\"123\\"";
```

Note

When single or double quotes need to be nested in a string, use a backslash (\\) to escape. For example:

```
RETURN "\\Nebula Graph is amazing,\" the user says.\"";
```

Statement termination

- End the nGQL statements with an English semicolon (;).

Not recommended:

```
FETCH PROP ON player "player100"
```

Recommended:

```
FETCH PROP ON player "player100";
```

- Use a pipe (|) to separate a composite statement, and end the statement with an English semicolon at the end of the last line. Using an English semicolon before a pipe will cause the statement to fail.

Not supported:

```
GO FROM "player100" \
OVER follow \
YIELD dst(edge) AS id; | \
GO FROM $-.id \
OVER serve \
YIELD properties($$).name AS Team, properties($^).name AS Player;
```

Supported:

```
GO FROM "player100" \
OVER follow \
YIELD dst(edge) AS id | \
GO FROM $-.id \
OVER serve \
YIELD properties($$).name AS Team, properties($^).name AS Player;
```

- In a composite statement that contains user-defined variables, use an English semicolon to end the statements that define the variables. If you do not follow the rules to add a semicolon or use a pipe to end the composite statement, the execution will fail.

Not supported:

```
$var = GO FROM "player100" \  
OVER follow \  
YIELD follow._dst AS id \  
GO FROM $var.id \  
OVER serve \  
YIELD $$team.name AS Team, $^.player.name AS Player;
```

Not supported:

```
$var = GO FROM "player100" \  
OVER follow \  
YIELD follow._dst AS id | \  
GO FROM $var.id \  
OVER serve \  
YIELD $$team.name AS Team, $^.player.name AS Player;
```

Supported:

```
$var = GO FROM "player100" \  
OVER follow \  
YIELD follow._dst AS id; \  
GO FROM $var.id \  
OVER serve \  
YIELD $$team.name AS Team, $^.player.name AS Player;
```

Last update: January 14, 2022

4.2 Data types

4.2.1 Numeric types

nGQL supports both integer and floating-point number.

Integer

Signed 64-bit integer (INT64), 32-bit integer (INT32), 16-bit integer (INT16), and 8-bit integer (INT8) are supported.

Type	Declared keywords	Range
INT64	INT64 or INT	-9,223,372,036,854,775,808 ~ 9,223,372,036,854,775,807
INT32	INT32	-2,147,483,648 ~ 2,147,483,647
INT16	INT16	-32,768 ~ 32,767
INT8	INT8	-128 ~ 127

Floating-point number

Both single-precision floating-point format (FLOAT) and double-precision floating-point format (DOUBLE) are supported.

Type	Declared keywords	Range	Precision
FLOAT	FLOAT	3.4E +/- 38	6~7 bits
DOUBLE	DOUBLE	1.7E +/- 308	15~16 bits

Scientific notation is also supported, such as `1e2`, `1.1e2`, `.3e4`, `1.e4`, and `-1234E-10`.

Note

The data type of DECIMAL in MySQL is not supported.

Reading and writing of data values

When writing and reading different types of data, nGQL complies with the following rules:

Data type	Set as VID	Set as property	Resulted data type
INT64	Supported	Supported	INT64
INT32	Not supported	Supported	INT64
INT16	Not supported	Supported	INT64
INT8	Not supported	Supported	INT64
FLOAT	Not supported	Supported	DOUBLE
DOUBLE	Not supported	Supported	DOUBLE

For example, nGQL does not support setting `VID` as INT8, but supports setting a certain property type of `TAG` or `Edge type` as INT8. When using the nGQL statement to read the property of INT8, the resulted type is INT64.

- Multiple formats are supported:
- Decimal, such as `123456`.
- Hexadecimal, such as `0x1e240`.
- Octal, such as `0361100`.

However, Nebula Graph will parse the written non-decimal value into a decimal value and save it. The value read is decimal.

For example, the type of the property `score` is `INT`. The value of `0xb` is assigned to it through the INSERT statement. If querying the property value with statements such as FETCH, you will get the result `11`, which is the decimal result of the hexadecimal `0xb`.

- Round a FLOAT/DOUBLE value when inserting it to an INT column.

Last update: January 14, 2022

4.2.2 Boolean

A boolean data type is declared with the `bool` keyword and can only take the values `true` or `false`.

nGQL supports using boolean in the following ways:

- Define the data type of the property value as a boolean.
 - Use boolean as judgment conditions in the `WHERE` clause.
-

Last update: January 14, 2022

4.2.3 String

Fixed-length strings and variable-length strings are supported.

Declaration and literal representation

The string type is declared with the keywords of:

- `STRING` : Variable-length strings.
- `FIXED_STRING(<length>)` : Fixed-length strings. `<length>` is the length of the string, such as `FIXED_STRING(32)`.

A string type is used to store a sequence of characters (text). The literal constant is a sequence of characters of any length surrounded by double or single quotes. For example, `"Hello, Cooper"` or `'Hello, Cooper'`.

String reading and writing

Nebula Graph supports using string types in the following ways:

- Define the data type of `VID` as a fixed-length string.
- Set the variable-length string as the Schema name, including the names of the graph space, tag, edge type, and property.
- Define the data type of the property as a fixed-length or variable-length string.

For example:

- Define the data type of the property as a fixed-length string

```
nebula> CREATE TAG IF NOT EXISTS t1 (p1 FIXED_STRING(10));
```

- Define the data type of the property as a variable-length string

```
nebula> CREATE TAG IF NOT EXISTS t2 (p2 STRING);
```

When the fixed-length string you try to write exceeds the length limit:

- If the fixed-length string is a property, the writing will succeed, and Nebula Graph will truncate the string and only store the part that meets the length limit.
- If the fixed-length string is a VID, the writing will fail and Nebula Graph will return an error.

Escape characters

Line breaks are not allowed in a string. Escape characters are supported within strings, for example:

- `"\n\t\r\b\f"`
- `"\110ello world"`

OpenCypher compatibility

There are some tiny differences between openCypher and Cypher, as well as nGQL. The following is what openCypher requires. Single quotes cannot be converted to double quotes.

```
# File: Literals.feature
Feature: Literals

Background:
  Given any graph
  Scenario: Return a single-quoted string
    When executing query:
      """
      RETURN '' AS literal
      """
    Then the result should be, in any order:
      | literal |
```

```
| ' ' | # Note: it should return single-quotes as openCypher required.  
And no side effects
```

While Cypher accepts both single quotes and double quotes as the return results. nGQL follows the Cypher way.

```
nebula > YIELD ' ' AS quote1, "" AS quote2, "" AS quote3, ' ' AS quote4  
+-----+-----+-----+  
| quote1 | quote2 | quote3 | quote4 |  
+-----+-----+-----+  
| " "   | ""     | ""     | " "   |  
+-----+-----+-----+
```

Last update: January 14, 2022

4.2.4 Date and time types

This topic will describe the `DATE`, `TIME`, `DATETIME`, `TIMESTAMP`, and `DURATION` types.

Precautions

- While inserting time-type property values with `DATE`, `TIME`, and `DATETIME`, Nebula Graph transforms them to a UTC time according to the timezone specified with the `timezone_name` parameter in the [configuration files](#).

Note

To change the timezone, modify the `timezone_name` value in the configuration files of all Nebula Graph services.

- `date()`, `time()`, and `datetime()` can convert a time-type property with a specified timezone. For example, `datetime("2017-03-04 22:30:40.003000+08:00")` or `datetime("2017-03-04T22:30:40.003000[Asia/Shanghai]")`.
- `date()`, `time()`, `datetime()`, and `timestamp()` all accept empty parameters to return the current date, time, and datetime.
- `date()`, `time()`, and `datetime()` all accept the property name to return a specific property value of itself. For example, `date().month` returns the current month, while `time("02:59:40").minute` returns the minutes of the importing time.

OpenCypher Compatibility

In nGQL:

- Year, month, day, hour, minute, second, millisecond, and microsecond are supported, while the nanosecond is not supported.
- `localdatetime()` is not supported.
- Most string time formats are not supported. The exceptions are `YYYY-MM-DDThh:mm:ss` and `YYYY-MM-DD hh:mm:ss`.
- The single-digit string time format is supported. For example, `time("1:1:1")`.

DATE

The `DATE` type is used for values with a date part but no time part. Nebula Graph retrieves and displays `DATE` values in the `YYYY-MM-DD` format. The supported range is `-32768-01-01` to `32767-12-31`.

The properties of `date()` include `year`, `month`, and `day`.

TIME

The `TIME` type is used for values with a time part but no date part. Nebula Graph retrieves and displays `TIME` values in `hh:mm:ss.msmsmsususus` format. The supported range is `00:00:00.000000` to `23:59:59.999999`.

The properties of `time()` include `hour`, `minute`, and `second`.

DATETIME

The `DATETIME` type is used for values that contain both date and time parts. Nebula Graph retrieves and displays `DATETIME` values in `YYYY-MM-DDThh:mm:ss.msmsmsususus` format. The supported range is `-32768-01-01T00:00:00.000000` to `32767-12-31T23:59:59.999999`.

The properties of `datetime()` include `year`, `month`, `day`, `hour`, `minute`, and `second`.

TIMESTAMP

The `TIMESTAMP` data type is used for values that contain both date and time parts. It has a range of `1970-01-01T00:00:01` UTC to `2262-04-11T23:47:16` UTC.

`TIMESTAMP` has the following features:

- Stored and displayed in the form of a timestamp, such as `1615974839`, which means `2021-03-17T17:53:59`.
- Supported `TIMESTAMP` querying methods: `timestamp` and `timestamp()` function.
- Supported `TIMESTAMP` inserting methods: `timestamp`, `timestamp()` function, and `now()` function.
- `timestamp()` function accepts empty parameters to get the timestamp of the current timezone and also accepts a string type parameter.

```
# Return the current time.
nebula> RETURN timestamp();
+-----+
| timestamp() |
+-----+
| 1625469277 |
+-----+

nebula> RETURN timestamp("2022-01-05T06:18:43");
+-----+
| timestamp("2022-01-05T06:18:43") |
+-----+
| 1641363523 |
+-----+
```

Legacy version compatibility

In Nebula Graph versions earlier than 3.0.0, the time string passed into the `timestamp()` function could include milliseconds and microseconds. As of version 3.0.0, the time string passed into the `timestamp()` function cannot include milliseconds and microseconds.

- The underlying storage data type is **int64**.

DURATION

The `DURATION` data type is used to indicate a period of time. Map data that are freely combined by `years`, `months`, `days`, `hours`, `minutes`, and `seconds` indicates the `DURATION`.

`DURATION` has the following features:

- Creating indexes for `DURATION` is not supported.
- `DURATION` can be used to calculate the specified time.

Examples

1. Create a tag named `date1` with three properties: `DATE`, `TIME`, and `DATETIME`.

```
nebula> CREATE TAG IF NOT EXISTS date1(p1 date, p2 time, p3 datetime);
```

2. Insert a vertex named `test1`.

```
nebula> INSERT VERTEX date1(p1, p2, p3) VALUES "test1":(date("2021-03-17"), time("17:53:59"), datetime("2017-03-04T22:30:40.003000[Asia/Shanghai]"));
```

3. Return the content of the property `p1` on `test1`.

```
nebula> CREATE TAG INDEX IF NOT EXISTS date1_index ON date1(p1);
nebula> REBUILD TAG INDEX date1_index;
nebula> MATCH (v:date1) RETURN v.date1.p1;
+-----+
| v.date1.p1.month |
+-----+
| 3 |
+-----+
```

4. Create a tag named `school` with the property of `TIMESTAMP`.

```
nebula> CREATE TAG IF NOT EXISTS school(name string, found_time timestamp);
```

5. Insert a vertex named `dut` with a found-time timestamp of `"1988-03-01T08:00:00"`.

```
# Insert as a timestamp. The corresponding timestamp of 1988-03-01T08:00:00 is 573177600, or 573206400 UTC.
nebula> INSERT VERTEX school(name, found_time) VALUES "DUT":("DUT", 573206400);

# Insert in the form of date and time.
nebula> INSERT VERTEX school(name, found_time) VALUES "DUT":("DUT", timestamp("1988-03-01T08:00:00"));
```

6. Insert a vertex named `dut` and store time with `now()` or `timestamp()` functions.

```
# Use now() function to store time
nebula> INSERT VERTEX school(name, found_time) VALUES "dut":("dut", now());

# Use timestamp() function to store time
nebula> INSERT VERTEX school(name, found_time) VALUES "dut":("dut", timestamp());
```

You can also use `WITH` statement to set a specific date and time, or to perform calculations. For example:

```
nebula> WITH time({hour: 12, minute: 31, second: 14, millisecond:111, microsecond: 222}) AS d RETURN d;
+-----+
| d      |
+-----+
| 12:31:14.111222 |
+-----+

nebula> WITH date({year: 1984, month: 10, day: 11}) AS x RETURN x + 1;
+-----+
| (x+1)  |
+-----+
| 1984-10-12 |
+-----+

nebula> WITH date('1984-10-11') as x, duration({years: 12, days: 14, hours: 99, minutes: 12}) as d \
RETURN x + d AS sum, x - d AS diff;
+-----+
| sum      | diff      |
+-----+
| 1996-10-29 | 1972-09-23 |
+-----+
```

Last update: January 14, 2022

4.2.5 NULL

You can set the properties for vertices or edges to `NULL`. Also, you can set the `NOT NULL` constraint to make sure that the property values are `NOT NULL`. If not specified, the property is set to `NULL` by default.

Logical operations with NULL

Here is the truth table for `AND`, `OR`, `XOR`, and `NOT`.

a	b	a AND b	a OR b	a XOR b	NOT a
false	false	false	false	false	true
false	null	false	null	null	true
false	true	false	true	true	true
true	false	false	true	true	false
true	null	null	true	null	false
true	true	true	true	false	false
null	false	false	null	null	null
null	null	null	null	null	null
null	true	null	true	null	null

OpenCypher compatibility

The comparisons and operations about `NULL` are different from openCypher. There may be changes later.

COMPARISONS WITH NULL

The comparison operations with `NULL` are incompatible with openCypher.

OPERATIONS AND RETURN WITH NULL

The `NULL` operations and `RETURN` with `NULL` are incompatible with openCypher.

Examples

USE NOT NULL

Create a tag named `player`. Specify the property `name` as `NOT NULL`.

```
nebula> CREATE TAG IF NOT EXISTS player(name string NOT NULL, age int);
```

Use `SHOW` to create tag statements. The property `name` is `NOT NULL`. The property `age` is `NULL` by default.

```
nebula> SHOW CREATE TAG player;
+-----+
| Tag      | Create Tag                                     |
+-----+
| "student" | "CREATE TAG `player` (                         |
|           |   `name` string NOT NULL,                     |
|           |   `age` int64 NULL                            |
|           | ) ttl_duration = 0, ttl_col = ""             |
+-----+
```

Insert the vertex `Kobe`. The property `age` can be `NULL`.

```
nebula> INSERT VERTEX player(name, age) VALUES "Kobe":("Kobe",null);
```

USE NOT NULL AND SET THE DEFAULT

Create a tag named `player`. Specify the property `age` as `NOT NULL`. The default value is `18`.

```
nebula> CREATE TAG IF NOT EXISTS player(name string, age int NOT NULL DEFAULT 18);
```

Insert the vertex `Kobe`. Specify the property `name` only.

```
nebula> INSERT VERTEX player(name) VALUES "Kobe":("Kobe");
```

Query the vertex `Kobe`. The property `age` is `18` by default.

```
nebula> FETCH PROP ON player "Kobe" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 18, name: "Kobe"} |
+-----+
```

Last update: January 14, 2022

4.2.6 Lists

The list is a composite data type. A list is a sequence of values. Individual elements in a list can be accessed by their positions.

A list starts with a left square bracket `[` and ends with a right square bracket `]`. A list contains zero, one, or more expressions. List elements are separated from each other with commas `(,)`. Whitespace around elements is ignored in the list, thus line breaks, tab stops, and blanks can be used for formatting.

OpenCypher compatibility

A composite data type (i.e. set, map, and list) **CANNOT** be stored as properties of vertices or edges.

List operations

You can use the preset `list function` to operate the list, or use the index to filter the elements in the list.

INDEX SYNTAX

```
[M]
[M..N]
[M..]
[..N]
```

The index of nGQL supports queries from front to back, starting from 0. 0 means the first element, 1 means the second element, and so on. It also supports queries from back to front, starting from -1. -1 means the last element, -2 means the penultimate element, and so on.

- `[M]`: represents the element whose index is `M`.
- `[M..N]`: represents the elements whose indexes are greater or equal to `M` but smaller than `N`. Return empty when `N` is 0.
- `[M..]`: represents the elements whose indexes are greater or equal to `M`.
- `[..N]`: represents the elements whose indexes are smaller than `N`. Return empty when `N` is 0.

Note

- Return empty if the index is out of bounds, while return normally if the index is within the bound.
- Return empty if $M \geq N$.
- When querying a single element, if `M` is null, return `BAD_TYPE`. When conducting a range query, if `M` or `N` is null, return `null`.

Examples

```
# The following query returns the list [1,2,3].
nebula> RETURN list[1, 2, 3] AS a;
+-----+
| a      |
+-----+
| [1, 2, 3] |
+-----+

# The following query returns the element whose index is 3 in the list [1,2,3,4,5]. In a list, the index starts from 0, and thus the return element is 4.
nebula> RETURN range(1,5)[3];
+-----+
| range(1,5)[3] |
+-----+
| 4              |
+-----+

# The following query returns the element whose index is -2 in the list [1,2,3,4,5]. The index of the last element in a list is -1, and thus the return element is 4.
nebula> RETURN range(1,5)[-2];
+-----+
| range(1,5)[-2] |
+-----+
| 4              |
+-----+

# The following query returns the elements whose indexes are from 0 to 3 (not including 3) in the list [1,2,3,4,5].
nebula> RETURN range(1,5)[0..3];
+-----+
```

```

| range(1,5)[0..3] |
+-----+
| [1, 2, 3]      |
+-----+

# The following query returns the elements whose indexes are greater than 2 in the list [1,2,3,4,5].
nebula> RETURN range(1,5)[3..] AS a;
+-----+
| a      |
+-----+
| [4, 5] |
+-----+

# The following query returns the elements whose indexes are smaller than 3.
nebula> WITH list[1, 2, 3, 4, 5] AS a \
      RETURN a[..3] AS r;
+-----+
| r      |
+-----+
| [1, 2, 3] |
+-----+

# The following query filters the elements whose indexes are greater than 2 in the list [1,2,3,4,5], calculate them respectively, and returns them.
nebula> RETURN [n IN range(1,5) WHERE n > 2 | n + 10] AS a;
+-----+
| a      |
+-----+
| [13, 14, 15] |
+-----+

# The following query returns the elements from the first to the penultimate (inclusive) in the list [1, 2, 3].
nebula> YIELD list[1, 2, 3][0..-1] AS a;
+-----+
| a      |
+-----+
| [1, 2] |
+-----+

# The following query returns the elements from the first (exclusive) to the third backward in the list [1, 2, 3, 4, 5].
nebula> YIELD list[1, 2, 3, 4, 5][-3..-1] AS a;
+-----+
| a      |
+-----+
| [3, 4] |
+-----+

# The following query sets the variables and returns the elements whose indexes are 1 and 2.
nebula> $var = YIELD 1 AS f, 3 AS t; \
      YIELD list[1, 2, 3][$var.f..$var.t] AS a;
+-----+
| a      |
+-----+
| [2, 3] |
+-----+

# The following query returns empty because the index is out of bound. It will return normally when the index is within the bound.
nebula> RETURN list[1, 2, 3, 4, 5] [0..10] AS a;
+-----+
| a      |
+-----+
| [1, 2, 3, 4, 5] |
+-----+

nebula> RETURN list[1, 2, 3] [-5..5] AS a;
+-----+
| a      |
+-----+
| [1, 2, 3] |
+-----+

# The following query returns empty because there is a [0..0].
nebula> RETURN list[1, 2, 3, 4, 5] [0..0] AS a;
+-----+
| a      |
+-----+
| []     |
+-----+

# The following query returns empty because of M ≥ N.
nebula> RETURN list[1, 2, 3, 4, 5] [3..1] AS a;
+-----+
| a      |
+-----+
| []     |
+-----+

# When conduct a range query, if `M` or `N` is null, return `null`.
nebula> WITH list[1,2,3] AS a \
      RETURN a[0..null] as r;
+-----+
| r      |
+-----+
| __NULL__ |
+-----+

```

```
# The following query calculates the elements in the list [1,2,3,4,5] respectively and returns them without the list head.
nebula> RETURN tail([n IN range(1, 5) | 2 * n - 10]) AS a;
+-----+
| a      |
+-----+
| [-6, -4, -2, 0] |
+-----+

# The following query takes the elements in the list [1,2,3] as true and return.
nebula> RETURN [n IN range(1, 3) WHERE true | n] AS r;
+-----+
| r      |
+-----+
| [1, 2, 3] |
+-----+

# The following query returns the length of the list [1,2,3].
nebula> RETURN size(list[1,2,3]);
+-----+
| size(list[1,2,3]) |
+-----+
| 3                |
+-----+

# The following query calculates the elements in the list [92,90] and runs a conditional judgment in a where clause.
nebula> GO FROM "player100" OVER follow WHERE properties(edge).degree NOT IN [x IN [92, 90] | x + $$player.age] \
YIELD dst(edge) AS id, properties(edge).degree AS degree;
+-----+
| id      | degree |
+-----+
| "player101" | 95    |
| "player102" | 90    |
+-----+

# The following query takes the query result of the MATCH statement as the elements in a list. Then it calculates and returns them.
nebula> MATCH p = (n:player{name:"Tim Duncan"})-[:follow]->(m) \
RETURN [n IN nodes(p) | n.age + 100] AS r;
+-----+
| r      |
+-----+
| [142, 136] |
| [142, 133] |
+-----+
```

OpenCypher compatibility

- In openCypher, return `null` when querying a single out-of-bound element. However, in nGQL, return `OUT_OF_RANGE` when querying a single out-of-bound element.

```
nebula> RETURN range(0,5)[-12];
+-----+
| range(0,5)[-12] |
+-----+
| OUT_OF_RANGE    |
+-----+
```

- A composite data type (i.e., set, map, and list) **CAN NOT** be stored as properties for vertices or edges.

It is recommended to modify the graph modeling method. The composite data type should be modeled as an adjacent edge of a vertex, rather than its property. Each adjacent edge can be dynamically added or deleted. The rank values of the adjacent edges can be used for sequencing.

- Patterns are not supported in the list. For example, `[(src)-[]->(m) | m.name]`.

Last update: January 14, 2022

4.2.7 Sets

The set is a composite data type. A set is a set of values. Unlike a List, values in a set are unordered and each value must be unique.

A set starts with a left curly bracket `{` and ends with a right curly bracket `}`. A set contains zero, one, or more expressions. Set elements are separated from each other with commas `,`. Whitespace around elements is ignored in the set, thus line breaks, tab stops, and blanks can be used for formatting.

OpenCypher compatibility

- A composite data type (i.e. set, map, and list) **CANNOT** be stored as properties of vertices or edges.
- A set is not a data type in openCypher, but in nGQL, users can use the set.

Examples

```
# The following query returns the set {1,2,3}.
nebula> RETURN set{1, 2, 3} AS a;
+-----+
| a      |
+-----+
| {3, 2, 1} |
+-----+

# The following query returns the set {1,2}, Because the set does not allow repeating elements, and the order is unordered.
nebula> RETURN set{1, 2, 1} AS a;
+-----+
| a      |
+-----+
| {2, 1} |
+-----+

# The following query checks whether the set has the specified element 1.
nebula> RETURN 1 IN set{1, 2} AS a;
+-----+
| a      |
+-----+
| true   |
+-----+

# The following query counts the number of elements in the set.
nebula> YIELD size(set{1, 2, 1}) AS a;
+---+
| a  |
+---+
| 2  |
+---+

# The following query returns a set of target vertex property values.
nebula> GO FROM "player100" OVER follow \
      YIELD set{properties($$).name,properties($$).age} as a;
+-----+
| a      |
+-----+
| {36, "Tony Parker"} |
| {41, "Manu Ginobili"} |
+-----+
```

Last update: January 14, 2022

4.2.8 Maps

The map is a composite data type. Maps are unordered collections of key-value pairs. In maps, the key is a string. The value can have any data type. You can get the map element by using `map['key']`.

A map starts with a left curly bracket `{` and ends with a right curly bracket `}`. A map contains zero, one, or more key-value pairs. Map elements are separated from each other with commas `,`. Whitespace around elements is ignored in the map, thus line breaks, tab stops, and blanks can be used for formatting.

OpenCypher compatibility

- A composite data type (i.e. set, map, and list) **CANNOT** be stored as properties of vertices or edges.
- Map projection is not supported.

Examples

```
# The following query returns the simple map.
nebula> YIELD map{key1: 'Value1', Key2: 'Value2'} as a;
+-----+
| a      |
+-----+
| {Key2: "Value2", key1: "Value1"} |
+-----+

# The following query returns the list type map.
nebula> YIELD map{listKey: [{inner: 'Map1'}, {inner: 'Map2'}]} as a;
+-----+
| a      |
+-----+
| {listKey: [{inner: "Map1"}, {inner: "Map2"}]} |
+-----+

# The following query returns the hybrid type map.
nebula> RETURN map{a: LIST[1,2], b: SET{1,2,1}, c: "hee"} as a;
+-----+
| a      |
+-----+
| {a: [1, 2], b: {2, 1}, c: "hee"} |
+-----+

# The following query returns the specified element in a map.
nebula> RETURN map{a: LIST[1,2], b: SET{1,2,1}, c: "hee"}["b"] AS b;
+-----+
| b      |
+-----+
| {2, 1} |
+-----+

# The following query checks whether the map has the specified key, not support checks whether the map has the specified value yet.
nebula> RETURN "a" IN MAP{a:1, b:2} AS a;
+-----+
| a      |
+-----+
| true   |
+-----+
```

Last update: January 14, 2022

4.2.9 Type Conversion/Type coercions

Converting an expression of a given type to another type is known as type conversion.

Legacy version compatibility

- nGQL 1.0 adopts the `c`-style of type conversion (implicitly or explicitly): `(type_name)expression`. For example, the results of `YIELD (int)(TRUE)` is `1`. But it is error-prone to users who are not familiar with the C language.
- since nGQL 2.0, the openCypher way of type coercions is adopted.

Type coercions functions

Function	Description
<code>toBoolean()</code>	Converts a string value to a boolean value.
<code>toFloat()</code>	Converts an integer or string value to a floating point number.
<code>toInteger()</code>	Converts a floating point or string value to an integer value.
<code>type()</code>	Returns the string representation of the relationship type.

Examples

```

nebula> UNWIND [true, false, 'true', 'false', NULL] AS b \
        RETURN toBoolean(b) AS b;
+-----+
| b      |
+-----+
| true   |
| false  |
| true   |
| false  |
| __NULL__|
+-----+

nebula> RETURN toFloat(1), toFloat('1.3'), toFloat('1e3'), toFloat('not a number');
+-----+-----+-----+-----+
| toFloat(1) | toFloat("1.3") | toFloat("1e3") | toFloat("not a number") |
+-----+-----+-----+-----+
| 1.0        | 1.3            | 1000.0         | __NULL__                |
+-----+-----+-----+-----+

nebula> RETURN toInteger(1), toInteger('1'), toInteger('1e3'), toInteger('not a number');
+-----+-----+-----+-----+
| toInteger(1) | toInteger("1") | toInteger("1e3") | toInteger("not a number") |
+-----+-----+-----+-----+
| 1            | 1              | 1000             | __NULL__                  |
+-----+-----+-----+-----+

nebula> MATCH (a:player)-[e]-() \
        RETURN type(e);
+-----+
| type(e) |
+-----+
| "follow" |
| "follow" |
+-----+

nebula> MATCH (a:player {name: "Tim Duncan"}) \
        WHERE toInteger(right(id(a),3)) == 100 \
        RETURN a;
+-----+-----+
| a      |
+-----+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
+-----+-----+

nebula> MATCH (n:player) \
        WITH n LIMIT toInteger(ceil(1.8)) \
        RETURN count(*) AS count;
+-----+
| count |
+-----+
| 2     |
+-----+

```


Last update: February 8, 2022

4.2.10 Geography

Geography is a data type composed of latitude and longitude that represents geospatial information. Nebula Graph currently supports Point, LineString, and Polygon in [Simple Features](#) and some functions in [SQL-MM 3](#), such as part of the core geo parsing, construction, formatting, conversion, predicates, and dimensions.

Type description

A point is the basic data type of geography, which is determined by a latitude and a longitude. For example, `"POINT(3 8)"` means that the longitude is `3°` and the latitude is `8°`. Multiple points can form a linestring or a polygon.

Shape	Example	Description
Point	<code>"POINT(3 8)"</code>	Specifies the data type as a point.
LineString	<code>"LINESTRING(3 8, 4.7 73.23)"</code>	Specifies the data type as a linestring.
Polygon	<code>"POLYGON((0 1, 1 2, 2 3, 0 1))"</code>	Specifies the data type as a polygon.

Examples

For functions about the geography data type, see [Geography functions](#).

```
//Create a Tag to allow storing any geography data type.
nebula> CREATE TAG IF NOT EXISTS any_shape(geo geography);

//Create a Tag to allow storing a point only.
nebula> CREATE TAG IF NOT EXISTS only_point(geo geography(point));

//Create a Tag to allow storing a linestring only.
nebula> CREATE TAG IF NOT EXISTS only_linestring(geo geography(linestring));

//Create a Tag to allow storing a polygon only.
nebula> CREATE TAG IF NOT EXISTS only_polygon(geo geography(polygon));

//Create an Edge type to allow storing any geography data type.
nebula> CREATE EDGE IF NOT EXISTS any_shape_edge(geo geography);

//Create a vertex to store the geography of a polygon.
nebula> INSERT VERTEX any_shape(geo) VALUES "103":(ST_GeogFromText("POLYGON((0 1, 1 2, 2 3, 0 1))"));

//Create an edge to store the geography of a polygon.
nebula> INSERT EDGE any_shape_edge(geo) VALUES "201"->"302":(ST_GeogFromText("POLYGON((0 1, 1 2, 2 3, 0 1))"));

//Query the geography of Vertex 103.
nebula> FETCH PROP ON any_shape "103" YIELD ST_ASText(any_shape.geo);
+-----+
| VertexID | ST_ASText(any_shape.geo) |
+-----+
| "103"    | "POLYGON((0 1, 1 2, 2 3, 0 1))" |
+-----+

//Query the geography of the edge which traverses from Vertex 201 to Vertex 302.
nebula> FETCH PROP ON any_shape_edge "201"->"302" YIELD ST_ASText(any_shape_edge.geo);
+-----+
| any_shape_edge._src | any_shape_edge._dst | any_shape_edge._rank | ST_ASText(any_shape_edge.geo) |
+-----+
| "201"              | "302"              | 0                    | "POLYGON((0 1, 1 2, 2 3, 0 1))" |
+-----+

//Create an index for the geography of the Tag any_shape and run LOOKUP.
nebula> CREATE TAG INDEX IF NOT EXISTS any_shape_geo_index ON any_shape(geo);
nebula> REBUILD TAG INDEX any_shape_geo_index;
nebula> LOOKUP ON any_shape YIELD ST_ASText(any_shape.geo);
+-----+
| VertexID | ST_ASText(any_shape.geo) |
+-----+
| "103"    | "POLYGON((0 1, 1 2, 2 3, 0 1))" |
+-----+
```

When creating an index for geography properties, you can specify the parameters for the index.

Parameter	Default value	Description
<code>s2_max_level</code>	<code>30</code>	The maximum level of S2 cell used in the covering. Allowed values: <code>1 ~ 30</code> . Setting it to less than the default means that Nebula Graph will be forced to generate coverings using larger cells.
<code>s2_max_cells</code>	<code>8</code>	The maximum number of S2 cells used in the covering. Provides a limit on how much work is done exploring the possible coverings. Allowed values: <code>1 ~ 30</code> . You may want to use higher values for odd-shaped regions such as skinny rectangles.

Note

Specifying the above two parameters does not affect the Point type of property. The `s2_max_level` value of the Point type is forced to be `30`.

```
nebula> CREATE TAG INDEX IF NOT EXISTS any_shape_geo_index ON any_shape(geo) with (s2_max_level=30, s2_max_cells=8);
```

Last update: January 14, 2022

4.3 Variables and composite queries

4.3.1 Composite queries (clause structure)

Composite queries put data from different queries together. They then use filters, group-bys, or sorting before returning the combined return results.

Nebula Graph supports three methods to run composite queries (or sub-queries):

- (openCypher) Clauses are chained together, and they feed intermediate result sets between each other.
- (Native nGQL) More than one query can be batched together, separated by semicolons (;). The result of the last query is returned as the result of the batch.
- (Native nGQL) Queries can be piped together by using the pipe (|). The result of the previous query can be used as the input of the next query.

OpenCypher compatibility

In a composite query, **do not** put together openCypher and native nGQL clauses in one statement. For example, this statement is undefined: `MATCH ... | GO ... | YIELD ...`.

- If you are in the openCypher way (`MATCH`, `RETURN`, `WITH`, etc), do not introduce any pipe or semicolons to combine the sub-clauses.
- If you are in the native nGQL way (`FETCH`, `GO`, `LOOKUP`, etc), you must use pipe or semicolons to combine the sub-clauses.

Undefined behavior

Do not put together `native nGQL` and `openCypher compatible sentences` in one composite statement because this behavior is undefined.

Composite queries are not `transactional` queries (as in SQL/Cypher)

For example, a query is composed of three sub-queries: `A B C`, `A | B | C` or `A; B; C`. In that A is a read operation, B is a computation operation, and C is a write operation. If any part fails in the execution, the whole result will be undefined. There is no rollback. What is written depends on the query executor.

Note

OpenCypher has no requirement of `transaction`.

Examples

- OpenCypher compatibility statement

```
# Connect multiple queries with clauses.
nebula> MATCH p=(v:player{name:"Tim Duncan"})--() \
        WITH nodes(p) AS n \
```

```
UNWIND n AS n1 \
RETURN DISTINCT n1;
```

- Native nGQL (Semicolon queries)

```
# Only return edges.
nebula> SHOW TAGS; SHOW EDGES;

# Insert multiple vertices.
nebula> INSERT VERTEX player(name, age) VALUES "player100":("Tim Duncan", 42); \
        INSERT VERTEX player(name, age) VALUES "player101":("Tony Parker", 36); \
        INSERT VERTEX player(name, age) VALUES "player102":("LaMarcus Aldridge", 33);
```

- Native nGQL (Pipe queries)

```
# Connect multiple queries with pipes.
nebula> GO FROM "player100" OVER follow YIELD dst(edge) AS id | \
        GO FROM $-.id OVER serve YIELD properties($$).name AS Team, \
        properties($^).name AS Player;

+-----+-----+
| Team      | Player      |
+-----+-----+
| "Spurs"    | "Tony Parker" |
| "Hornets"  | "Tony Parker" |
| "Spurs"    | "Manu Ginobili" |
+-----+-----+
```

Last update: January 14, 2022

4.3.2 User-defined variables

User-defined variables allow passing the result of one statement to another.

OpenCypher compatibility

In openCypher, when you refer to the vertex, edge, or path of a variable, you need to name it first. For example:

```
nebula> MATCH (v:player{name:"Tim Duncan"}) RETURN v;
+-----+
| v |
+-----+
| ("player100" :player{name: "Tim Duncan", age: 42}) |
+-----+
```

The user-defined variable in the preceding query is `v`.

Native nGQL

User-defined variables are written as `$var_name`. The `var_name` consists of letters, numbers, or underline characters. Any other characters are not permitted.

The user-defined variables are valid only at the current execution (namely, in this composite query). When the execution ends, the user-defined variables will be automatically expired. The user-defined variables in one statement **CANNOT** be used in any other clients, executions, or sessions.

You can use user-defined variables in composite queries. Details about composite queries, see [Composite queries](#).

Note

User-defined variables are case-sensitive.

Example

```
nebula> $var = GO FROM "player100" OVER follow YIELD dst(edge) AS id; \
GO FROM $var.id OVER serve YIELD properties($$).name AS Team, \
properties($^).name AS Player;
+-----+
| Team | Player |
+-----+
| "Spurs" | "Tony Parker" |
| "Hornets" | "Tony Parker" |
| "Spurs" | "Manu Ginobili" |
+-----+
```

Last update: January 14, 2022

4.3.3 Property reference

You can refer to the properties of a vertex or an edge in `WHERE` and `YIELD` syntax.

Note

This function applies to native nGQL only.

Property reference for vertex

FOR SOURCE VERTEX

```
$^.<tag_name>.<prop_name>
```

Parameter	Description
<code>\$^</code>	is used to get the property of the source vertex.
<code>tag_name</code>	is the tag name of the vertex.
<code>prop_name</code>	specifies the property name.

FOR DESTINATION VERTEX

```
$$.<tag_name>.<prop_name>
```

Parameter	Description
<code>\$\$</code>	is used to get the property of the destination vertex.
<code>tag_name</code>	is the tag name of the vertex.
<code>prop_name</code>	specifies the property name.

Property reference for edge

FOR USER-DEFINED EDGE PROPERTY

```
<edge_type>.<prop_name>
```

Parameter	Description
<code>edge_type</code>	is the edge type of the edge.
<code>prop_name</code>	specifies the property name of the edge type.

FOR BUILT-IN PROPERTIES

Apart from the user-defined edge property, there are four built-in properties in each edge:

Parameter	Description
<code>_src</code>	source vertex ID of the edge
<code>_dst</code>	destination vertex ID of the edge
<code>_type</code>	edge type
<code>_rank</code>	the rank value for the edge

Examples

The following query returns the `name` property of the `player` tag on the source vertex and the `age` property of the `player` tag on the destination vertex.

```
nebula> GO FROM "player100" OVER follow YIELD $^.player.name AS startName, $$player.age AS endAge;
+-----+-----+
| startName | endAge |
+-----+-----+
| "Tim Duncan" | 36 |
| "Tim Duncan" | 41 |
+-----+-----+
```

The following query returns the `degree` property of the edge type `follow`.

```
nebula> GO FROM "player100" OVER follow YIELD follow.degree;
+-----+
| follow.degree |
+-----+
| 95 |
+-----+
```

The following query returns the source vertex, the destination vertex, the edge type, and the edge rank value of the edge type `follow`.

```
nebula> GO FROM "player100" OVER follow YIELD follow._src, follow._dst, follow._type, follow._rank;
+-----+-----+-----+-----+
| follow._src | follow._dst | follow._type | follow._rank |
+-----+-----+-----+-----+
| "player100" | "player101" | 17 | 0 |
| "player100" | "player125" | 17 | 0 |
+-----+-----+-----+-----+
```

Legacy version compatibility

Nebula Graph 2.6.0 and later versions support the new [Schema function](#). The statements in the above examples are written as follows in 2.6.0.

```
GO FROM "player100" OVER follow YIELD properties($^).name AS startName, properties($$).age AS endAge;
GO FROM "player100" OVER follow YIELD properties(edge).degree;
GO FROM "player100" OVER follow YIELD src(edge), dst(edge), type(edge), rank(edge);
```

In 2.6.0, Nebula Graph is still compatible with the old syntax.

Last update: January 14, 2022

4.4 Operators

4.4.1 Comparison operators

Nebula Graph supports the following comparison operators.

Name	Description
<code>=</code>	Assigns a value
<code>+</code>	Addition operator
<code>-</code>	Minus operator
<code>*</code>	Multiplication operator
<code>/</code>	Division operator
<code>==</code>	Equal operator
<code>!=</code> , <code><></code>	Not equal operator
<code>></code>	Greater than operator
<code>>=</code>	Greater than or equal operator
<code><</code>	Less than operator
<code><=</code>	Less than or equal operator
<code>%</code>	Modulo operator
<code>-</code>	Changes the sign of the argument
<code>IS NULL</code>	NULL check
<code>IS NOT NULL</code>	Not NULL check
<code>IS EMPTY</code>	EMPTY check
<code>IS NOT EMPTY</code>	Not EMPTY check

The result of the comparison operation is `true` or `false`.

Note

- Comparability between values of different types is often undefined. The result could be `NULL` or others.
- `EMPTY` is currently used only for checking, and does not support functions or operations such as `GROUP BY`, `count()`, `sum()`, `max()`, `hash()`, `collect()`, `+` or `*`.

OpenCypher compatibility

openCypher does not have `EMPTY`. Thus `EMPTY` is not supported in `MATCH` statements.

Examples

```
==
```

String comparisons are case-sensitive. Values of different types are not equal.

Note

The equal operator is `==` in nGQL, while in openCypher it is `=`.

```
nebula> RETURN 'A' == 'a', toUpper('A') == toUpper('a'), toLower('A') == toLower('a');
+-----+-----+-----+
| ("A"=="a") | (toUpper("A")==toUpper("a")) | (toLower("A")==toLower("a")) |
+-----+-----+-----+
| false      | true                          | true                          |
+-----+-----+-----+

nebula> RETURN '2' == 2, toInteger('2') == 2;
+-----+-----+
| ("2"==2) | (toInteger("2")==2) |
+-----+-----+
| false    | true                |
+-----+-----+
```

>

```
nebula> RETURN 3 > 2;
+-----+
| (3>2) |
+-----+
| true  |
+-----+

nebula> WITH 4 AS one, 3 AS two \
      RETURN one > two AS result;
+-----+
| result |
+-----+
| true   |
+-----+
```

>=

```
nebula> RETURN 2 >= "2", 2 >= 2;
+-----+-----+
| (2>="2") | (2>=2) |
+-----+-----+
| __NULL__ | true   |
+-----+-----+
```

<

```
nebula> YIELD 2.0 < 1.9;
+-----+
| (2<1.9) |
+-----+
| false   |
+-----+
```

<=

```
nebula> YIELD 0.11 <= 0.11;
+-----+
| (0.11<=0.11) |
+-----+
| true          |
+-----+
```

!=

```
nebula> YIELD 1 != '1';
+-----+
| (1!="1") |
+-----+
| true     |
+-----+
```

IS [NOT] NULL

```
nebula> RETURN null IS NULL AS value1, null == null AS value2, null != null AS value3;
+-----+-----+-----+
| value1 | value2 | value3 |
+-----+-----+-----+
| true   | __NULL__ | __NULL__ |
+-----+-----+-----+

nebula> RETURN length(NULL), size(NULL), count(NULL), NULL IS NULL, NULL IS NOT NULL, sin(NULL), NULL + NULL, [1, NULL] IS NULL;
+-----+-----+-----+-----+-----+-----+-----+-----+
| 0 | 0 | 0 | true | false | null | null | null |
+-----+-----+-----+-----+-----+-----+-----+-----+
```

```

| length(NULL) | size(NULL) | count(NULL) | NULL IS NULL | NULL IS NOT NULL | sin(NULL) | (NULL+NULL) | [1,NULL] IS NULL |
+-----+
| __NULL__ | __NULL__ | 0 | true | false | __NULL__ | __NULL__ | false |
+-----+

nebula> WITH {name: null} AS map \
RETURN map.name IS NOT NULL;
+-----+
| map.name IS NOT NULL |
+-----+
| false |
+-----+

nebula> WITH {name: 'Mats', name2: 'Pontus'} AS map1, \
{name: null} AS map2, {notName: 0, notName2: null } AS map3 \
RETURN map1.name IS NULL, map2.name IS NOT NULL, map3.name IS NULL;
+-----+
| map1.name IS NULL | map2.name IS NOT NULL | map3.name IS NULL |
+-----+
| false | false | true |
+-----+

nebula> MATCH (n:player) \
RETURN n.player.age IS NULL, n.player.name IS NOT NULL, n.player.empty IS NULL;
+-----+
| n.player.age IS NULL | n.player.name IS NOT NULL | n.player.empty IS NULL |
+-----+
| false | true | true |
| false | true | true |
...

```

IS [NOT] EMPTY

```

nebula> RETURN null IS EMPTY;
+-----+
| NULL IS EMPTY |
+-----+
| false |
+-----+

nebula> RETURN "a" IS NOT EMPTY;
+-----+
| "a" IS NOT EMPTY |
+-----+
| true |
+-----+

nebula> GO FROM "player100" OVER * WHERE properties($$).name IS NOT EMPTY YIELD dst(edge);
+-----+
| dst(EDGE) |
+-----+
| "team204" |
| "player101" |
| "player125" |
+-----+

```

Last update: January 14, 2022

4.4.2 Boolean operators

Nebula Graph supports the following boolean operators.

Name	Description
AND	Logical AND
NOT	Logical NOT
OR	Logical OR
XOR	Logical XOR

For the precedence of the operators, refer to [Operator Precedence](#).

For the logical operations with `NULL`, refer to [NULL](#).

Legacy version compatibility

- Non-zero numbers cannot be converted to boolean values.

Last update: February 8, 2022

4.4.3 Pipe operators

Multiple queries can be combined using pipe operators in nGQL.

OpenCypher compatibility

Pipe operators apply to native nGQL only.

Syntax

One major difference between nGQL and SQL is how sub-queries are composed.

- In SQL, sub-queries are nested in the query statements.
- In nGQL, the shell style `PIPE (|)` is introduced into the sub-queries.

Examples

```
nebula> GO FROM "player100" OVER follow \
      YIELD dst(edge) AS dstid, properties($$).name AS Name | \
      GO FROM $-dstid OVER Follow YIELD dst(edge);
```

```
+-----+
| dst(EDGE) |
+-----+
| "player100" |
| "player102" |
| "player125" |
| "player100" |
+-----+
```

If there is no `YIELD` clause to define the output, the destination vertex ID is returned by default. If a `YIELD` clause is applied, the output is defined by the `YIELD` clause.

Users must define aliases in the `YIELD` clause for the reference operator `$-` to use, just like `$-.dstid` in the preceding example.

Performance tips

In Nebula Graph, pipes will affect the performance. Take `A | B` as an example, the effects are as follows:

1. Pipe operators operate synchronously. That is, the data can enter the pipe clause as a whole after the execution of clause `A` before the pipe operator is completed.
2. Pipe operators need to be serialized and deserialized, which is executed in a single thread.
3. If `A` sends a large amount of data to `|`, the entire query request may be very slow. You can try to split this statement.
 - a. Send `A` from the application,
 - b. Split the return results on the application,
 - c. Send to multiple `graphd` processes concurrently,
 - d. Every `graphd` process executes part of `B`.

This is usually much faster than executing a complete `A | B` with a single `graphd` process.

Last update: January 14, 2022

4.4.4 Reference operators

NGQL provides reference operators to represent a property in a `WHERE` or `YIELD` clause, or the output of the statement before the pipe operator in a composite query.

OpenCypher compatibility

Reference operators apply to native nGQL only.

Reference operator List

Reference operator	Description
<code>\$^</code>	Refers to a source vertex property. For more information, see Property reference .
<code>\$\$</code>	Refers to a destination vertex property. For more information, see Property reference .
<code>\$-</code>	Refers to the output of the statement before the pipe operator in a composite query. For more information, see Pipe .

Examples

```
# The following example returns the age of the source vertex and the destination vertex.
nebula> GO FROM "player100" OVER follow YIELD properties($^).age AS SrcAge, properties($$).age AS DestAge;
+-----+-----+
| SrcAge | DestAge |
+-----+-----+
| 42     | 36      |
| 42     | 41      |
+-----+-----+

# The following example returns the name and team of the players that player100 follows.
nebula> GO FROM "player100" OVER follow \
  YIELD dst(edge) AS id | \
  GO FROM $-.id OVER serve \
  YIELD $^.player.name AS Player, properties($$).name AS Team;
+-----+-----+
| Player | Team |
+-----+-----+
| "Tony Parker" | "Spurs" |
| "Tony Parker" | "Hornets" |
| "Manu Ginobili" | "Spurs" |
+-----+-----+
```

Last update: January 14, 2022

4.4.5 Set operators

This topic will describe the set operators, including `UNION`, `UNION ALL`, `INTERSECT`, and `MINUS`. To combine multiple queries, use these set operators.

All set operators have equal precedence. If a nGQL statement contains multiple set operators, Nebula Graph will evaluate them from left to right unless parentheses explicitly specify another order.

OpenCypher compatibility

Set operators apply to native nGQL only.

UNION, UNION DISTINCT, and UNION ALL

```
<left> UNION [DISTINCT | ALL] <right> [ UNION [DISTINCT | ALL] <right> ...]
```

- Operator `UNION DISTINCT` (or by short `UNION`) returns the union of two sets A and B without duplicated elements.
- Operator `UNION ALL` returns the union of two sets A and B with duplicated elements.
- The `<left>` and `<right>` must have the same number of columns and data types. Different data types are converted according to the [Type Conversion](#).

EXAMPLES

```
# The following statement returns the union of two query results without duplicated elements.
nebula> GO FROM "player102" OVER follow YIELD dst(edge) \
      UNION \
      GO FROM "player100" OVER follow YIELD dst(edge);
+-----+
| dst(EDGE) |
+-----+
| "player100" |
| "player101" |
| "player125" |
+-----+

# The following statement returns the union of two query results with duplicated elements.
nebula> GO FROM "player102" OVER follow YIELD dst(edge) \
      UNION ALL \
      GO FROM "player100" OVER follow YIELD dst(edge);
+-----+
| dst(EDGE) |
+-----+
| "player100" |
| "player101" |
| "player101" |
| "player125" |
+-----+

# UNION can also work with the YIELD statement. The DISTINCT keyword will check duplication by all the columns for every line, and remove duplicated lines if every
column is the same.
nebula> GO FROM "player102" OVER follow \
      YIELD dst(edge) AS id, properties(edge).degree AS Degree, properties($$).age AS Age \
      UNION /* DISTINCT */ \
      GO FROM "player100" OVER follow \
      YIELD dst(edge) AS id, properties(edge).degree AS Degree, properties($$).age AS Age;
+-----+-----+-----+
| id      | Degree | Age |
+-----+-----+-----+
| "player100" | 75    | 42  |
| "player101" | 75    | 36  |
| "player101" | 95    | 36  |
| "player125" | 95    | 41  |
+-----+-----+-----+
```

INTERSECT

```
<left> INTERSECT <right>
```

- Operator `INTERSECT` returns the intersection of two sets A and B (denoted by $A \cap B$).
- Similar to `UNION`, the `left` and `right` must have the same number of columns and data types. Different data types are converted according to the [Type Conversion](#).

EXAMPLE

```
nebula> GO FROM "player102" OVER follow \
      YIELD dst(edge) AS id, properties(edge).degree AS Degree, properties($$).age AS Age \
      INTERSECT \
      GO FROM "player100" OVER follow \
      YIELD dst(edge) AS id, properties(edge).degree AS Degree, properties($$).age AS Age;
+-----+-----+
| id | Degree | Age |
+-----+-----+
+-----+-----+
```

MINUS

```
<left> MINUS <right>
```

Operator `MINUS` returns the subtraction (or difference) of two sets A and B (denoted by $A - B$). Always pay attention to the order of `left` and `right`. The set $A - B$ consists of elements that are in A but not in B.

EXAMPLE

```
nebula> GO FROM "player100" OVER follow YIELD dst(edge) \
      MINUS \
      GO FROM "player102" OVER follow YIELD dst(edge);
+-----+
| dst(EDGE) |
+-----+
| "player125" |
+-----+

nebula> GO FROM "player102" OVER follow YIELD dst(edge) \
      MINUS \
      GO FROM "player100" OVER follow YIELD dst(edge);
+-----+
| dst(EDGE) |
+-----+
| "player100" |
+-----+
```

Precedence of the set operators and pipe operators

Please note that when a query contains a pipe `|` and a set operator, the pipe takes precedence. Refer to [Pipe](#) for details. The query `GO FROM 1 UNION GO FROM 2 | GO FROM 3` is the same as the query `GO FROM 1 UNION (GO FROM 2 | GO FROM 3)`.

EXAMPLES

```
nebula> GO FROM "player102" OVER follow \
      YIELD dst(edge) AS play_dst \
      UNION \
      GO FROM "team200" OVER serve REVERSELY \
      YIELD src(edge) AS play_src \
      | GO FROM $.play_src OVER follow YIELD dst(edge) AS play_dst;
+-----+
| play_dst |
+-----+
| "player100" |
| "player101" |
| "player117" |
| "player105" |
+-----+
```



```

nebula> GO FROM "player102" OVER follow YIELD follow._dst AS play_dst \
UNION \
GO FROM "team200" OVER serve REVERSELY YIELD serve._dst AS play_dst \
| GO FROM $-.play_dst OVER follow YIELD follow._dst AS play_dst;

```

The above query executes the statements in the red bar first and then executes the statement in the green box.

The parentheses can change the execution priority. For example:

```

nebula> (GO FROM "player102" OVER follow \
YIELD dst(edge) AS play_dst \
UNION \
GO FROM "team200" OVER serve REVERSELY \
YIELD src(edge) AS play_dst) \
| GO FROM $-.play_dst OVER follow YIELD dst(edge) AS play_dst;

```

In the above query, the statements within the parentheses take precedence. That is, the `UNION` operation will be executed first, and its output will be executed as the input of the next operation with pipes.

Last update: January 14, 2022

4.4.6 String operators

You can use the following string operators for concatenating, querying, and matching.

Name	Description
+	Concatenates strings.
CONTAINS	Performs searchings in strings.
(NOT) IN	Checks whether a value is within a set of values.
(NOT) STARTS WITH	Performs matchings at the beginning of a string.
(NOT) ENDS WITH	Performs matchings at the end of a string.
Regular expressions	Perform string matchings using regular expressions.

Note

All the string searchings or matchings are case-sensitive.

Examples

+

```
nebula> RETURN 'a' + 'b';
+-----+
| ("a"+"b") |
+-----+
| "ab"      |
+-----+
nebula> UNWIND 'a' AS a UNWIND 'b' AS b RETURN a + b;
+-----+
| (a+b) |
+-----+
| "ab"  |
+-----+
```

CONTAINS

The `CONTAINS` operator requires string types on both left and right sides.

```
nebula> MATCH (s:player)-[e:serve]->(t:team) WHERE id(s) == "player101" \
AND t.team.name CONTAINS "ets" RETURN s.player.name, e.start_year, e.end_year, t.team.name;
+-----+-----+-----+-----+
| s.player.name | e.start_year | e.end_year | t.team.name |
+-----+-----+-----+-----+
| "Tony Parker" | 2018         | 2019         | "Hornets"    |
+-----+-----+-----+-----+

nebula> GO FROM "player101" OVER serve WHERE (STRING)properties(edge).start_year CONTAINS "19" AND \
properties($^).name CONTAINS "ny" \
YIELD properties($^).name, properties(edge).start_year, properties(edge).end_year, properties($$).name;
+-----+-----+-----+-----+
| properties($^).name | properties(EDGE).start_year | properties(EDGE).end_year | properties($$).name |
+-----+-----+-----+-----+
| "Tony Parker"      | 1999                         | 2018                       | "Spurs"              |
+-----+-----+-----+-----+

nebula> GO FROM "player101" OVER serve WHERE !(properties($$).name CONTAINS "ets") \
YIELD properties($^).name, properties(edge).start_year, properties(edge).end_year, properties($$).name;
+-----+-----+-----+-----+
| properties($^).name | properties(EDGE).start_year | properties(EDGE).end_year | properties($$).name |
+-----+-----+-----+-----+
| "Tony Parker"      | 1999                         | 2018                       | "Spurs"              |
+-----+-----+-----+-----+
```

(NOT) IN

```
nebula> RETURN 1 IN [1,2,3], "Yao" NOT IN ["Yi", "Tim", "Kobe"], NULL IN ["Yi", "Tim", "Kobe"];
+-----+-----+-----+
| (1 IN [1,2,3]) | ("Yao" NOT IN ["Yi", "Tim", "Kobe"]) | (NULL IN ["Yi", "Tim", "Kobe"]) |
+-----+-----+-----+
```

true	true	__NULL__	
+-----+	+-----+	+-----+	+-----+

(NOT) STARTS WITH

```
nebula> RETURN 'apple' STARTS WITH 'app', 'apple' STARTS WITH 'a', 'apple' STARTS WITH toUpper('a');
+-----+-----+-----+
| ("apple" STARTS WITH "app") | ("apple" STARTS WITH "a") | ("apple" STARTS WITH toUpper("a")) |
+-----+-----+-----+
| true                        | true                      | false                             |
+-----+-----+-----+
```

```
nebula> RETURN 'apple' STARTS WITH 'b', 'apple' NOT STARTS WITH 'app';
+-----+-----+
| ("apple" STARTS WITH "b") | ("apple" NOT STARTS WITH "app") |
+-----+-----+
| false                    | false                            |
+-----+-----+
```

(NOT) ENDS WITH

```
nebula> RETURN 'apple' ENDS WITH 'app', 'apple' ENDS WITH 'e', 'apple' ENDS WITH 'E', 'apple' ENDS WITH 'b';
+-----+-----+-----+-----+
| ("apple" ENDS WITH "app") | ("apple" ENDS WITH "e") | ("apple" ENDS WITH "E") | ("apple" ENDS WITH "b") |
+-----+-----+-----+-----+
| false                    | true                    | false                    | false                    |
+-----+-----+-----+-----+
```

REGULAR EXPRESSIONS**Note**

Regular expressions cannot work with native nGQL statements (`GO`, `FETCH`, `LOOKUP`, etc.). Use it in openCypher only (`MATCH`, `WHERE`, etc.).

Nebula Graph supports filtering by using regular expressions. The regular expression syntax is inherited from `std::regex`. You can match on regular expressions by using `=~ 'regex'`. For example:

```
nebula> RETURN "384748.39" =~ "\d+(\.\d{2})?";
+-----+
| ("384748.39" =~ "\d+(\.\d{2})?") |
+-----+
| true                             |
+-----+
```

```
nebula> MATCH (v:player) WHERE v.player.name =~ 'Tony.*' RETURN v.player.name;
+-----+
| v.player.name |
+-----+
| "Tony Parker" |
+-----+
```

Last update: January 14, 2022

4.4.7 List operators

Nebula Graph supports the following list operators:

List operator	Description
+	Concatenates lists.
IN	Checks if an element exists in a list.
[]	Accesses an element(s) in a list using the index operator.

Examples

```

nebula> YIELD [1,2,3,4,5]+[6,7] AS myList;
+-----+
| myList |
+-----+
| [1, 2, 3, 4, 5, 6, 7] |
+-----+

nebula> RETURN size([NULL, 1, 2]);
+-----+
| size([NULL,1,2]) |
+-----+
| 3 |
+-----+

nebula> RETURN NULL IN [NULL, 1];
+-----+
| (NULL IN [NULL,1]) |
+-----+
| __NULL__ |
+-----+

nebula> WITH [2, 3, 4, 5] AS numberlist \
  UNWIND numberlist AS number \
  WITH number \
  WHERE number IN [2, 3, 8] \
  RETURN number;
+-----+
| number |
+-----+
| 2 |
| 3 |
+-----+

nebula> WITH ['Anne', 'John', 'Bill', 'Diane', 'Eve'] AS names RETURN names[1] AS result;
+-----+
| result |
+-----+
| "John" |
+-----+

```

Last update: January 14, 2022

4.4.8 Operator precedence

The following list shows the precedence of nGQL operators in descending order. Operators that are shown together on a line have the same precedence.

- `-` (negative number)
- `!`, `NOT`
- `*`, `/`, `%`
- `-`, `+`
- `==`, `>=`, `>`, `<=`, `<`, `<>`, `!=`
- `AND`
- `OR`, `XOR`
- `=` (assignment)

For operators that occur at the same precedence level within an expression, evaluation proceeds left to right, with the exception that assignments evaluate right to left.

The precedence of operators determines the order of evaluation of terms in an expression. To modify this order and group terms explicitly, use parentheses.

Examples

```
nebula> RETURN 2+3*5;
+-----+
| (2+(3*5)) |
+-----+
| 17        |
+-----+

nebula> RETURN (2+3)*5;
+-----+
| ((2+3)*5) |
+-----+
| 25        |
+-----+
```

OpenCypher compatibility

In openCypher, comparisons can be chained arbitrarily, e.g., `x < y <= z` is equivalent to `x < y AND y <= z` in openCypher.

But in nGQL, `x < y <= z` is equivalent to `(x < y) <= z`. The result of `(x < y)` is a boolean. Compare it with an integer `z`, and you will get the final result `NULL`.

Last update: January 14, 2022

4.5 Functions and expressions

4.5.1 Built-in math functions

Function descriptions

Nebula Graph supports the following built-in math functions:

Function	Description
<code>double abs(double x)</code>	Returns the absolute value of the argument.
<code>double floor(double x)</code>	Returns the largest integer value smaller than or equal to the argument. (Rounds down)
<code>double ceil(double x)</code>	Returns the smallest integer greater than or equal to the argument. (Rounds up)
<code>double round(double x, int y)</code>	Returns the rounded value of x. y specifies the rounding index (position). If y is greater than 0, round at the yth position to the right of the decimal point. If y is less than 0, round at the yth position to the left of the decimal point. Pay attention to the floating-point precision when using this function.
<code>double sqrt(double x)</code>	Returns the square root of the argument.
<code>double cbrt(double x)</code>	Returns the cubic root of the argument.
<code>double hypot(double x, double y)</code>	Returns the hypotenuse of a right-angled triangle.
<code>double pow(double x, double y)</code>	Returns the result of (x^y) .
<code>double exp(double x)</code>	Returns the result of (e^x) .
<code>double exp2(double x)</code>	Returns the result of (2^x) .
<code>double log(double x)</code>	Returns the base-e logarithm of the argument.
<code>double log2(double x)</code>	Returns the base-2 logarithm of the argument.
<code>double log10(double x)</code>	Returns the base-10 logarithm of the argument.
<code>double sin(double x)</code>	Returns the sine of the argument.
<code>double asin(double x)</code>	Returns the inverse sine of the argument.
<code>double cos(double x)</code>	Returns the cosine of the argument.
<code>double acos(double x)</code>	Returns the inverse cosine of the argument.
<code>double tan(double x)</code>	Returns the tangent of the argument.
<code>double atan(double x)</code>	Returns the inverse tangent of the argument.
<code>double rand()</code>	Returns a random floating point number in the range from 0 (inclusive) to 1 (exclusive); i.e. [0,1).
<code>int rand32(int min, int max)</code>	Returns a random 32-bit integer in <code>[min, max)</code> . If you set only one argument, it is parsed as <code>max</code> and <code>min</code> is 0 by default. If you set no argument, the system returns a random signed 32-bit integer.
<code>int rand64(int min, int max)</code>	Returns a random 64-bit integer in <code>[min, max)</code> . If you set only one argument, it is parsed as <code>max</code> and <code>min</code> is 0 by default. If you set no argument, the system returns a random signed 64-bit integer.
<code>collect()</code>	Puts all the collected values into a list.
<code>avg()</code>	Returns the average value of the argument.
<code>count()</code>	Returns the number of records.
<code>max()</code>	Returns the maximum value.
<code>min()</code>	Returns the minimum value.
<code>std()</code>	Returns the population standard deviation.

Function	Description
sum()	Returns the sum value.
bit_and()	Bitwise AND.
bit_or()	Bitwise OR.
bit_xor()	Bitwise XOR.
int size()	Returns the number of elements in a list or a map.
int range(int start, int end, int step)	Returns a list of integers from [start,end] in the specified steps. step is 1 by default.
int sign(double x)	Returns the signum of the given number. If the number is 0, the system returns 0. If the number is negative, the system returns -1. If the number is positive, the system returns 1.
double e()	Returns the base of the natural logarithm, e (2.718281828459045).
double pi()	Returns the mathematical constant pi (3.141592653589793).
double radians()	Converts degrees to radians. radians(180) returns 3.141592653589793.

Note

If the argument is `NULL`, the output is undefined.

Example

```
# The following statement supports aggregate functions.
nebula> GO FROM "player100" OVER follow YIELD dst(edge) AS dst, properties($$).age AS age \
| GROUP BY $-.dst \
YIELD \
$-.dst AS dst, \
toInteger((sum($-.age)/count($-.age))+avg(distinct $-.age+1)+1 AS statistics;
+-----+-----+
| dst      | statistics |
+-----+-----+
| "player125" | 84.0      |
| "player101" | 74.0      |
+-----+-----+
Got 2 rows (time spent 4739/5064 us)
```

Last update: January 14, 2022

4.5.2 Built-in string functions

Nebula Graph supports the following built-in string functions:

Note

Like SQL, the position index of nGQL starts from `1`, while in C language it starts from `0`.

Function	Description
<code>int strcasecmp(string a, string b)</code>	Compares string a and b without case sensitivity. When <code>a = b</code> , the return value is 0. When <code>a > b</code> , the return value is greater than 0. When <code>a < b</code> , the return value is less than 0.
<code>string lower(string a)</code>	Returns the argument in lowercase.
<code>string toLower(string a)</code>	The same as <code>lower()</code> .
<code>string upper(string a)</code>	Returns the argument in uppercase.
<code>string toUpper(string a)</code>	The same as <code>upper()</code> .
<code>int length(string a)</code>	Returns the length of the given string in bytes.
<code>string trim(string a)</code>	Removes leading and trailing spaces.
<code>string ltrim(string a)</code>	Removes leading spaces.
<code>string rtrim(string a)</code>	Removes trailing spaces.
<code>string left(string a, int count)</code>	Returns a substring consisting of <code>count</code> characters from the left side of string a. If string a is shorter than <code>count</code> , the system returns string a.
<code>string right(string a, int count)</code>	Returns a substring consisting of <code>count</code> characters from the right side of string a. If string a is shorter than <code>count</code> , the system returns string a.
<code>string lpad(string a, int size, string letters)</code>	Left-pads string a with string <code>letters</code> and returns a substring with the length of <code>size</code> .
<code>string rpad(string a, int size, string letters)</code>	Right-pads string a with string <code>letters</code> and returns a substring with the length of <code>size</code> .
<code>string substr(string a, int pos, int count)</code>	Returns a substring extracting <code>count</code> characters starting from the specified position <code>pos</code> of string a.
<code>string substring(string a, int pos, int count)</code>	The same as <code>substr()</code> .
<code>string reverse(string)</code>	Returns a string in reverse order.
<code>string replace(string a, string b, string c)</code>	Replaces string b in string a with string c.
<code>list split(string a, string b)</code>	Splits string a at string b and returns a list of strings.
<code>string toString()</code>	Takes in any data type and converts it into a string.
<code>int hash()</code>	Takes in any data type and encodes it into a hash value.

Note

If the argument is `NULL`, the return is undefined.

Explanations for the return of `substr()` and `substring()`

- The position index starts from `0`.
- If `pos` is `0`, the whole string is returned.
- If `pos` is greater than the maximum string index, an empty string is returned.
- If `pos` is a negative number, `BAD_DATA` is returned.
- If `count` is omitted, the function returns the substring starting at the position given by `pos` and extending to the end of the string.
- If `count` is `0`, an empty string is returned.
- Using `NULL` as any of the argument of `substr()` will cause an issue.

OpenCypher compatibility

- In openCypher, if `a` is `null`, `null` is returned.
- In openCypher, if `pos` is `0`, the returned substring starts from the first character, and extend to `count` characters.
- In openCypher, if either `pos` or `count` is `null` or a negative integer, an issue is raised.

Last update: January 14, 2022

4.5.3 Built-in date and time functions

Nebula Graph supports the following built-in date and time functions:

Function	Description
<code>int now()</code>	Returns the current date and time of the system time zone.
<code>timestamp timestamp()</code>	Returns the current date and time of the system time zone.
<code>date date()</code>	Returns the current UTC date based on the current system.
<code>time time()</code>	Returns the current UTC time based on the current system.
<code>datetime datetime()</code>	Returns the current UTC date and time based on the current system.
<code>map duration()</code>	Returns the period of time. It can be used to calculate the specified time.

For more information, see [Date and time types](#).

Examples

```
nebula> RETURN now(), timestamp(), date(), time(), datetime();
+-----+-----+-----+-----+-----+
| now() | timestamp() | date() | time() | datetime() |
+-----+-----+-----+-----+-----+
| 1640057560 | 1640057560 | 2021-12-21 | 03:32:40.351000 | 2021-12-21T03:32:40.351000 |
+-----+-----+-----+-----+-----+
```

Last update: January 14, 2022

4.5.4 Schema functions

Nebula Graph supports the following schema functions.

For nGQL statements

Note

- The following functions are available in `YIELD` and `WHERE` clauses.

Function	Description
<code>id(vertex)</code>	Returns the ID of a vertex. The data type of the result is the same as the vertex ID.
<code>map properties(vertex)</code>	Returns the properties of a vertex.
<code>map properties(edge)</code>	Returns the properties of an edge.
<code>string type(edge)</code>	Returns the edge type of an edge.
<code>src(edge)</code>	Returns the source vertex ID of an edge. The data type of the result is the same as the vertex ID.
<code>dst(edge)</code>	Returns the destination vertex ID of an edge. The data type of the result is the same as the vertex ID.
<code>int rank(edge)</code>	Returns the rank value of an edge.
<code>vertex</code>	Returns the information of vertices, including VIDs, tags, properties, and values.
<code>edge</code>	Returns the information of edges, including edge types, source vertices, destination vertices, ranks, properties, and values.
<code>vertices</code>	Returns the information of vertices in a subgraph. For more information, see GET SUBGRAPH .
<code>edges</code>	Returns the information of edges in a subgraph. For more information, see GET SUBGRAPH .
<code>path</code>	Returns the information of a path. For more information, see FIND PATH .

Note

Since `vertex`, `edge`, `vertices`, `edges`, and `path` are keywords, you need to use `AS <alias>` to set the alias, such as

```
GO FROM "player100" OVER follow YIELD edge AS e;
```

For statements compatible with openCypher

Function	Description
id(<vertex>)	Returns the ID of a vertex. The data type of the result is the same as the vertex ID.
list tags(<vertex>)	Returns the Tag of a vertex, which serves the same purpose as labels().
list labels(<vertex>)	Returns the Tag of a vertex, which serves the same purpose as tags(). This function is used for compatibility with openCypher syntax.
map properties(<vertex_or_edge>)	Returns the properties of a vertex or an edge.
string type(<edge>)	Returns the edge type of an edge.
src(<edge>)	Returns the source vertex ID of an edge. The data type of the result is the same as the vertex ID.
dst(<edge>)	Returns the destination vertex ID of an edge. The data type of the result is the same as the vertex ID.
vertex startNode(<path>)	Visits an edge or a path and returns its source vertex ID.
string endNode(<path>)	Visits an edge or a path and returns its destination vertex ID.
int rank(<edge>)	Returns the rank value of an edge.

Examples

```

nebula> GO FROM "player100" OVER follow REVERSELY \
      YIELD src(edge) AS destination;
+-----+
| destination |
+-----+
| "player101" |
| "player102" |
...

nebula> LOOKUP ON player WHERE player.age > 45 YIELD id(vertex);
+-----+
| id(VERTEX) |
+-----+
| "player144" |
| "player140" |
+-----+

nebula> MATCH (a:player) WHERE id(a) == "player100" \
      RETURN tags(a), labels(a), properties(a);
+-----+-----+-----+
| tags(a) | labels(a) | properties(a) |
+-----+-----+-----+
| ["player"] | ["player"] | {age: 42, name: "Tim Duncan"} |
+-----+-----+-----+

nebula> MATCH p = (a :player {name : "Tim Duncan"})-[r:serve]-(t) \
      RETURN type(r), rank(r);
+-----+-----+
| type(r) | rank(r) |
+-----+-----+
| "serve" | 0 |
+-----+-----+

nebula> MATCH p = (a :player {name : "Tim Duncan"})-[r:serve]-(t) \
      RETURN startNode(p), endNode(p);
+-----+-----+-----+
| startNode(p) | endNode(p) |
+-----+-----+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) | ("team204" :team{name: "Spurs"}) |
+-----+-----+-----+

```

Last update: January 14, 2022

4.5.5 CASE expressions

The `CASE` expression uses conditions to filter the result of an nGQL query statement. It is usually used in the `YIELD` and `RETURN` clauses. nGQL provides two forms of `CASE` expressions just like openCypher: the simple form and the generic form.

The `CASE` expression will traverse all the conditions. When the first condition is met, the `CASE` expression stops reading the conditions and returns the result. If no conditions are met, it returns the result in the `ELSE` clause. If there is no `ELSE` clause and no conditions are met, it returns `NULL`.

The simple form of CASE expressions

SYNTAX

```
CASE <comparer>
WHEN <value> THEN <result>
[WHEN ...]
[ELSE <default>]
END
```

Caution

Always remember to end the `CASE` expression with an `END`.

Parameter	Description
<code>comparer</code>	A value or a valid expression that outputs a value. This value is used to compare with the <code>value</code> .
<code>value</code>	It will be compared with the <code>comparer</code> . If the <code>value</code> matches the <code>comparer</code> , then this condition is met.
<code>result</code>	The <code>result</code> is returned by the <code>CASE</code> expression if the <code>value</code> matches the <code>comparer</code> .
<code>default</code>	The <code>default</code> is returned by the <code>CASE</code> expression if no conditions are met.

EXAMPLES

```
nebula> RETURN \
CASE 2+3 \
WHEN 4 THEN 0 \
WHEN 5 THEN 1 \
ELSE -1 \
END \
AS result;
+-----+
| result |
+-----+
| 1      |
+-----+
```

```
nebula> GO FROM "player100" OVER follow \
YIELD properties($$).name AS Name, \
CASE properties($$).age > 35 \
WHEN true THEN "Yes" \
WHEN false THEN "No" \
ELSE "Nah" \
END \
AS Age_above_35;
+-----+-----+
| Name          | Age_above_35 |
+-----+-----+
| "Tony Parker" | "Yes"        |
| "Manu Ginobili" | "Yes"        |
+-----+-----+
```

The generic form of CASE expressions

SYNTAX

```

CASE
WHEN <condition> THEN <result>
[WHEN ...]
[ELSE <default>]
END

```

Parameter	Description
condition	If the <code>condition</code> is evaluated as true, the <code>result</code> is returned by the <code>CASE</code> expression.
result	The <code>result</code> is returned by the <code>CASE</code> expression if the <code>condition</code> is evaluated as true.
default	The <code>default</code> is returned by the <code>CASE</code> expression if no conditions are met.

EXAMPLES

```

nebula> YIELD \
  CASE WHEN 4 > 5 THEN 0 \
  WHEN 3+4==7 THEN 1 \
  ELSE 2 \
  END \
  AS result;
+-----+
| result |
+-----+
| 1      |
+-----+

```

```

nebula> MATCH (v:player) WHERE v.player.age > 30 \
  RETURN v.player.name AS Name, \
  CASE \
  WHEN v.player.name STARTS WITH "T" THEN "Yes" \
  ELSE "No" \
  END \
  AS Starts_with_T;
+-----+-----+
| Name          | Starts_with_T |
+-----+-----+
| "Tim"         | "Yes"         |
| "LaMarcus Aldridge" | "No"         |
| "Tony Parker" | "Yes"         |
+-----+-----+

```

Differences between the simple form and the generic form

To avoid the misuse of the simple form and the generic form, it is important to understand their differences. The following example can help explain them.

```

nebula> GO FROM "player100" OVER follow \
  YIELD properties($$).name AS Name, properties($$).age AS Age, \
  CASE properties($$).age \
  WHEN properties($$).age > 35 THEN "Yes" \
  ELSE "No" \
  END \
  AS Age_above_35;
+-----+-----+-----+
| Name          | Age | Age_above_35 |
+-----+-----+-----+
| "Tony Parker" | 36  | "No"         |
| "Manu Ginobili" | 41  | "No"         |
+-----+-----+-----+

```

The preceding `GO` query is intended to output `Yes` when the player's age is above 35. However, in this example, when the player's age is 36, the actual output is not as expected: It is `No` instead of `Yes`.

This is because the query uses the `CASE` expression in the simple form, and a comparison between the values of `$$player.age` and `$$player.age > 35` is made. When the player age is 36:

- The value of `$$player.age` is `36`. It is an integer.
- `$$player.age > 35` is evaluated to be `true`. It is a boolean.

The values of `$$player.age` and `$$player.age > 35` do not match. Therefore, the condition is not met and `No` is returned.

Last update: February 8, 2022

4.5.6 List functions

Nebula Graph supports the following list functions:

Function	Description
keys(expr)	Returns a list containing the string representations for all the property names of vertices, edges, or maps.
labels(vertex)	Returns the list containing all the tags of a vertex.
nodes(path)	Returns the list containing all the vertices in a path.
range(start, end [, step])	Returns the list containing all the fixed-length steps in [start,end] . step is 1 by default.
relationships(path)	Returns the list containing all the relationships in a path.
reverse(list)	Returns the list reversing the order of all elements in the original list.
tail(list)	Returns all the elements of the original list, excluding the first one.
head(list)	Returns the first element of a list.
last(list)	Returns the last element of a list.
coalesce(list)	Returns the first not null value in a list.
reduce()	See reduce() function .

Note

If the argument is `NULL`, the output is undefined.

Examples

```

nebula> WITH [NULL, 4923, 'abc', 521, 487] AS ids \
      RETURN reverse(ids), tail(ids), head(ids), last(ids), coalesce(ids);
+-----+-----+-----+-----+-----+
| reverse(ids) | tail(ids) | head(ids) | last(ids) | coalesce(ids) |
+-----+-----+-----+-----+-----+
| [487, 521, "abc", 4923, __NULL__] | [4923, "abc", 521, 487] | __NULL__ | 487 | 4923 |
+-----+-----+-----+-----+-----+

nebula> MATCH (a:player)-[r]->() \
      WHERE id(a) == "player100" \
      RETURN labels(a), keys(r);
+-----+-----+
| labels(a) | keys(r) |
+-----+-----+
| ["player"] | ["degree"] |
| ["player"] | ["degree"] |
| ["player"] | ["end_year", "start_year"] |
+-----+-----+

nebula> MATCH p = (a:player)-[]->(b)-[]->(c:team) \
      WHERE a.player.name == "Tim Duncan" AND c.team.name == "Spurs" \
      RETURN nodes(p);
+-----+-----+
| nodes(p) |
+-----+-----+
| [{"player100":player{age: 42, name: "Tim Duncan"}}, {"player101":player{age: 36, name: "Tony Parker"}}, {"team204":team{name: "Spurs"}}] |
| [{"player100":player{age: 42, name: "Tim Duncan"}}, {"player125":player{age: 41, name: "Manu Ginobili"}}, {"team204":team{name: "Spurs"}}] |
+-----+-----+

nebula> MATCH p = (a:player)-[]->(b)-[]->(c:team) WHERE a.player.name == "Tim Duncan" AND c.team.name == "Spurs" RETURN relationships(p);
+-----+-----+
| relationships(p) |
+-----+-----+
| [[:follow "player100"->"player101" @0 {degree: 95}], [:serve "player101"->"team204" @0 {end_year: 2018, start_year: 1999}]] |
| [[:follow "player100"->"player125" @0 {degree: 95}], [:serve "player125"->"team204" @0 {end_year: 2018, start_year: 2002}]] |
+-----+-----+

```

Last update: January 14, 2022

4.5.7 count() function

The `count()` function counts the number of the specified values or rows.

- (Native nGQL) You can use `count()` and `GROUP BY` together to group and count the number of specific values. Use `YIELD` to return.
- (OpenCypher style) You can use `count()` and `RETURN`. `GROUP BY` is not necessary.

Syntax

```
count({expr | *})
```

- `count(*)` returns the number of rows (including NULL).
- `count(expr)` returns the number of non-NULL values that meet the expression.
- `count()` and `size()` are different.

EXAMPLES

```
nebula> WITH [NULL, 1, 1, 2, 2] As a UNWIND a AS b \
      RETURN count(b), count(*), count(DISTINCT b);
+-----+-----+-----+
| count(b) | count(*) | count(distinct b) |
+-----+-----+-----+
| 4        | 5        | 2                  |
+-----+-----+-----+
```

```
# The statement in the following example searches for the people whom `player101` follows and people who follow `player101`, i.e. a bidirectional query.
nebula> GO FROM "player101" OVER follow BIDIRECT \
      YIELD properties($$).name AS Name \
      | GROUP BY $-.Name YIELD $-.Name, count(*);
+-----+-----+
| $-.Name          | count(*) |
+-----+-----+
| "LaMarcus Aldridge" | 2        |
| "Tim Duncan"       | 2        |
| "Marco Belinelli"   | 1        |
| "Manu Ginobili"     | 1        |
| "Boris Diaw"        | 1        |
| "Dejounte Murray"  | 1        |
+-----+-----+
```

The preceding example retrieves two columns:

- `$-.Name` : the names of the people.
- `count(*)` : how many times the names show up.

Because there are no duplicate names in the `basketballplayer` dataset, the number `2` in the column `count(*)` shows that the person in that row and `player101` have followed each other.

```
# a: The statement in the following example retrieves the age distribution of the players in the dataset.
nebula> LOOKUP ON player \
      YIELD player.age As playerage \
      | GROUP BY $-.playerage \
      YIELD $-.playerage as age, count(*) AS number \
      | ORDER BY $-.number DESC, $-.age DESC;
+-----+-----+
| age | number |
+-----+-----+
| 34  | 4      |
| 33  | 4      |
| 30  | 4      |
| 29  | 4      |
| 38  | 3      |
+-----+-----+
...

# b: The statement in the following example retrieves the age distribution of the players in the dataset.
nebula> MATCH (n:player) \
      RETURN n.player.age as age, count(*) as number \
      ORDER BY number DESC, age DESC;
+-----+-----+
| age | number |
+-----+-----+
```

```
+-----+
| 34 | 4 |
| 33 | 4 |
| 30 | 4 |
| 29 | 4 |
| 38 | 3 |
+-----+
...
```

The statement in the following example counts the number of edges that Tim Duncan relates.

```
nebula> MATCH (v:player{name:"Tim Duncan"}) -- (v2) \
        RETURN count(DISTINCT v2);
```

```
+-----+
| count(distinct v2) |
+-----+
| 11                  |
+-----+
```

The statement in the following example counts the number of edges that Tim Duncan relates and returns two columns (no DISTINCT and DISTINCT) in multi-hop queries.

```
nebula> MATCH (n:player {name : "Tim Duncan"})-[]->(friend:player)-[]->(fof:player) \
        RETURN count(fof), count(DISTINCT fof);
```

```
+-----+
| count(fof) | count(distinct fof) |
+-----+
| 4          | 3                     |
+-----+
```

Last update: January 14, 2022

4.5.8 collect()

The `collect()` function returns a list containing the values returned by an expression. Using this function aggregates data by merging multiple records or values into a single list.

The aggregate function `collect()` works like `GROUP BY` in SQL.

Examples

```
nebula> UNWIND [1, 2, 1] AS a \
        RETURN a;

+---+
| a |
+---+
| 1 |
| 2 |
| 1 |
+---+

nebula> UNWIND [1, 2, 1] AS a \
        RETURN collect(a);

+-----+
| collect(a) |
+-----+
| [1, 2, 1] |
+-----+

nebula> UNWIND [1, 2, 1] AS a \
        RETURN a, collect(a), size(collect(a));

+---+-----+-----+
| a | collect(a) | size(COLLECT(a)) |
+---+-----+-----+
| 2 | [2]         | 1                 |
| 1 | [1, 1]      | 2                 |
+---+-----+-----+

# The following examples sort the results in descending order, limit output rows to 3, and collect the output into a list.
nebula> UNWIND ["c", "b", "a", "d"] AS p \
        WITH p AS q \
        ORDER BY q DESC LIMIT 3 \
        RETURN collect(q);

+-----+
| collect(q) |
+-----+
| ["d", "c", "b"] |
+-----+

nebula> WITH [1, 1, 2, 2] AS coll \
        UNWIND coll AS x \
        WITH DISTINCT x \
        RETURN collect(x) AS ss;

+-----+
| ss |
+-----+
| [1, 2] |
+-----+

nebula> MATCH (n:player) \
        RETURN collect(n.player.age);

+-----+
| collect(n.player.age) |
+-----+
| [32, 32, 34, 29, 41, 40, 33, 25, 40, 37, ...
...

# The following example aggregates all the players' names by their ages.
nebula> MATCH (n:player) \
        RETURN n.player.age AS age, collect(n.player.name);

+-----+
| age | collect(n.player.name) |
+-----+
| 24 | ["Giannis Antetokounmpo"] |
| 20 | ["Luka Doncic"] |
| 25 | ["Joel Embiid", "Kyle Anderson"] |
+-----+
...
```

Last update: January 14, 2022

4.5.9 reduce() function

This topic will describe the `reduce` function.

OpenCypher Compatibility

In openCypher, the `reduce()` function is not defined. nGQL will implement the `reduce()` function in the Cypher way.

Syntax

The `reduce()` function applies an expression to each element in a list one by one, chains the result to the next iteration by taking it as the initial value, and returns the final result. This function iterates each element `e` in the given list, runs the expression on `e`, accumulates the result with the initial value, and store the new result in the accumulator as the initial value of the next iteration. It works like the fold or reduce method in functional languages such as Lisp and Scala.

```
reduce(<accumulator> = <initial>, <variable> IN <list> | <expression>)
```

Parameter	Description
accumulator	A variable that will hold the accumulated results as the list is iterated.
initial	An expression that runs once to give an initial value to the <code>accumulator</code> .
variable	A variable in the list that will be applied to the expression successively.
list	A list or a list of expressions.
expression	This expression will be run on each element in the list once and store the result value in the <code>accumulator</code> .

Note

The type of the value returned depends on the parameters provided, along with the semantics of the expression.

Examples

```
nebula> RETURN reduce(totalNum = 10, n IN range(1, 3) | totalNum + n) AS r;
+----+
| r   |
+----+
| 16  |
+----+

nebula> RETURN reduce(totalNum = -4 * 5, n IN [1, 2] | totalNum + n * 2) AS r;
+----+
| r   |
+----+
| -14 |
+----+

nebula> MATCH p = (n:player{name:"LeBron James"})<-[follow]-(m) \
RETURN nodes(p)[0].age AS src1, nodes(p)[1].age AS dst2, \
       reduce(totalAge = 100, n IN nodes(p) | totalAge + n.age) AS sum;
+-----+-----+-----+
| src1 | dst2 | sum |
+-----+-----+-----+
| 34   | 31   | 165 |
| 34   | 29   | 163 |
| 34   | 33   | 167 |
| 34   | 26   | 160 |
| 34   | 34   | 168 |
| 34   | 37   | 171 |
+-----+-----+-----+

nebula> LOOKUP ON player WHERE player.name == "Tony Parker" YIELD id(vertex) AS VertexID \
| GO FROM $.VertexID over follow \
WHERE properties(edge).degree != reduce(totalNum = 5, n IN range(1, 3) | properties($$).age + totalNum + n) \
YIELD properties($$).name AS id, properties($$).age AS age, properties(edge).degree AS degree;
+-----+-----+-----+
| id   | age | degree |
+-----+-----+-----+
| "Tim Duncan" | 42 | 95 |
| "LaMarcus Aldridge" | 33 | 90 |
```

	"Manu Ginobili"		41		95	
+	-----	+	-----	+	-----	+

Last update: January 14, 2022

4.5.10 hash function

The `hash()` function returns the hash value of the argument. The argument can be a number, a string, a list, a boolean, null, or an expression that evaluates to a value of the preceding data types.

The source code of the `hash()` function (MurmurHash2), seed (`0xc70f6907UL`), and other parameters can be found in `MurmurHash2.h`.

For Java, the hash function operates as follows.

```
MurmurHash2.hash64("to_be_hashed".getBytes(), "to_be_hashed".getBytes().length, 0xc70f6907)
```

Legacy version compatibility

In nGQL 1.0, when nGQL does not support string VIDs, a common practice is to hash the strings first and then use the values as VIDs. But in nGQL 2.0, both string VIDs and integer VIDs are supported, so there is no need to use `hash()` to set VIDs.

Hash a number

```
nebula> YIELD hash(-123);
+-----+
| hash(-123) |
+-----+
| -123      |
+-----+
```

Hash a string

```
nebula> YIELD hash("to_be_hashed");
+-----+
| hash(to_be_hashed) |
+-----+
| -1098333533029391540 |
+-----+
```

Hash a list

```
nebula> YIELD hash([1,2,3]);
+-----+
| hash([1,2,3]) |
+-----+
| 11093822460243 |
+-----+
```

Hash a boolean

```
nebula> YIELD hash(true);
+-----+
| hash(true) |
+-----+
| 1          |
+-----+

nebula> YIELD hash(false);
+-----+
| hash(false) |
+-----+
| 0          |
+-----+
```

Hash NULL

```
nebula> YIELD hash(NULL);
+-----+
| hash(NULL) |
+-----+
| -1         |
+-----+
```


Hash an expression

```
nebu1a> YIELD hash(toLower("HELLO NEBULA"));
+-----+
| hash(toLower("HELLO NEBULA")) |
+-----+
| -8481157362655072082          |
+-----+
```

Last update: January 14, 2022

4.5.11 concat function

The `concat()` and `concat_ws()` functions return strings concatenated by one or more strings.

`concat()` function

The `concat()` function requires at least two or more strings. All the parameters are concatenated into one string.

- If there is only one string, the string itself is returned.
- If any one of the strings is `NULL`, `NULL` is returned.

SYNTAX

```
concat(string1,string2,...)
```

EXAMPLES

```
//This example concatenates 1, 2, and 3.
nebula> RETURN concat("1","2","3") AS r;
+-----+
| r      |
+-----+
| "123"  |
+-----+

//In this example, one of the string is NULL.
nebula> RETURN concat("1","2",NULL) AS r;
+-----+
| r      |
+-----+
| __NULL__ |
+-----+

nebula> GO FROM "player100" over follow \
        YIELD concat(src(edge), properties($^).age, properties($$).name, properties(edge).degree) AS A;
+-----+
| A      |
+-----+
| "player10042Tony Parker95" |
| "player10042Manu Ginobili95" |
+-----+
```

`concat_ws()` function

The `concat_ws()` function connects two or more strings with a predefined separator.

- If the separator is `NULL`, the `concat_ws()` function returns `NULL`.
- If the separator is not `NULL` and there is only one string, the string itself is returned.
- If the separator is not `NULL` and there is a `NULL` in the strings, `NULL` is ignored during the concatenation.

SYNTAX

```
concat_ws(separator,string1,string2,... )
```

EXAMPLES

```
//This example concatenates a, b, and c with the separator +.
nebula> RETURN concat_ws("+","a","b","c") AS r;
+-----+
| r      |
+-----+
| "a+b+c" |
+-----+

//In this example, the separator is NULL.
nebula> RETURN concat_ws(NULL,"a","b","c") AS r;
+-----+
| r      |
+-----+
| __NULL__ |
+-----+

//In this example, the separator is + and there is a NULL in the strings.
```

```

nebula> RETURN concat_ws("+","a",NULL,"b","c") AS r;
+-----+
| r      |
+-----+
| "a+b+c" |
+-----+

//In this example, the separator is + and there is only one string.
nebula> RETURN concat_ws("+","a") AS r;
+-----+
| r      |
+-----+
| "a"    |
+-----+

nebula> GO FROM "player100" over follow \
      YIELD concat_ws(" ",src(edge), properties($^).age, properties($$).name, properties(edge).degree) AS A;
+-----+
| A      |
+-----+
| "player100 42 Tony Parker 95" |
| "player100 42 Manu Ginobili 95" |
+-----+

```

Last update: January 14, 2022

4.5.12 Predicate functions

Predicate functions return `true` or `false`. They are most commonly used in `WHERE` clauses.

Nebula Graph supports the following predicate functions:

Functions	Description
<code>exists()</code>	Returns <code>true</code> if the specified property exists in the vertex, edge or map. Otherwise, returns <code>false</code> .
<code>any()</code>	Returns <code>true</code> if the specified predicate holds for at least one element in the given list. Otherwise, returns <code>false</code> .
<code>all()</code>	Returns <code>true</code> if the specified predicate holds for all elements in the given list. Otherwise, returns <code>false</code> .
<code>none()</code>	Returns <code>true</code> if the specified predicate holds for no element in the given list. Otherwise, returns <code>false</code> .
<code>single()</code>	Returns <code>true</code> if the specified predicate holds for exactly one of the elements in the given list. Otherwise, returns <code>false</code> .

Note

NULL is returned if the list is NULL or all of its elements are NULL.

Compatibility

In openCypher, only function `exists()` is defined and specified. The other functions are implement-dependent.

Syntax

```
<predicate>(<variable> IN <list> WHERE <condition>)
```

Examples

```
nebula> RETURN any(n IN [1, 2, 3, 4, 5, NULL] \
    WHERE n > 2) AS r;
+-----+
| r      |
+-----+
| true   |
+-----+

nebula> RETURN single(n IN range(1, 5) \
    WHERE n == 3) AS r;
+-----+
| r      |
+-----+
| true   |
+-----+

nebula> RETURN none(n IN range(1, 3) \
    WHERE n == 0) AS r;
+-----+
| r      |
+-----+
| true   |
+-----+

nebula> WITH [1, 2, 3, 4, 5, NULL] AS a \
    RETURN any(n IN a WHERE n > 2);
+-----+
| any(n IN a WHERE (n>2)) |
+-----+
| true                     |
+-----+

nebula> MATCH p = (n:player{name:"LeBron James"})<-[:follow]-(m) \
    RETURN nodes(p)[0].name AS n1, nodes(p)[1].name AS n2, \
    all(n IN nodes(p) WHERE n.name NOT STARTS WITH "D") AS b;
+-----+
| n1      | n2      | b      |
+-----+
| LeBron | LeBron | true   |
+-----+
```

```

| "LeBron James" | "Danny Green" | false |
| "LeBron James" | "Dejounte Murray" | false |
| "LeBron James" | "Chris Paul" | true |
| "LeBron James" | "Kyrie Irving" | true |
| "LeBron James" | "Carmelo Anthony" | true |
| "LeBron James" | "Dwyane Wade" | false |
+-----+

nebula> MATCH p = (n:player{name:"LeBron James"})-[:follow]->(m) \
RETURN single(n IN nodes(p) WHERE n.age > 40) AS b;
+-----+
| b |
+-----+
| true |
+-----+

nebula> MATCH (n:player) \
RETURN exists(n.player.id), n IS NOT NULL;
+-----+
| exists(n.id) | n IS NOT NULL |
+-----+
| false | true |
...

nebula> MATCH (n:player) \
WHERE exists(n['name']) RETURN n;
+-----+
| n |
+-----+
| ("Grant Hill" :player{age: 46, name: "Grant Hill"}) |
| ("Marc Gasol" :player{age: 34, name: "Marc Gasol"}) |
+-----+
...
```

Last update: January 14, 2022

4.5.13 Geography functions

Geography functions are used to generate or perform operations on the value of the geography data type.

For descriptions of the geography data types, see [Geography](#).

Descriptions

Function	Return Type	Description
ST_Point(longitude, latitude)	GEOGRAPHY	Creates the geography that contains a point.
ST_GeogFromText(wkt_string)	GEOGRAPHY	Returns the geography corresponding to the input WKT string.
ST_ASText(geography)	STRING	Returns the WKT string of the input geography.
ST_Centroid(geography)	GEOGRAPHY	Returns the centroid of the input geography in the form of the single point geography.
ST_IsValid(geography)	BOOL	Returns whether the input geography is valid.
ST_Intersects(geography_1, geography_2)	BOOL	Returns whether geography_1 and geography_2 have intersections.
ST_Covers(geography_1, geography_2)	BOOL	Returns whether geography_1 completely contains geography_2. If there is no point outside geography_1 in geography_2, return True.
ST_CoveredBy(geography_1, geography_2)	BOOL	Returns whether geography_2 completely contains geography_1. If there is no point outside geography_2 in geography_1, return True.
ST_DWithin(geography_1, geography_2, distance)	BOOL	If the distance between one point (at least) in geography_1 and one point in geography_2 is less than or equal to the distance specified by the distance parameter (measured by meters), return True.
ST_Distance(geography_1, geography_2)	FLOAT	Returns the smallest possible distance (measured by meters) between two non-empty geographies.
S2_CellIdFromPoint(point_geography)	INT	Returns the S2 Cell ID that covers the point geography.
S2_CoveringCellIds(geography)	ARRAY<INT64>	Returns an array of S2 Cell IDs that cover the input geography.

Examples

```

nebula> RETURN ST_ASText(ST_Point(1,1));
+-----+
| ST_ASText(ST_Point(1,1)) |
+-----+
| "POINT(1 1)"           |
+-----+

nebula> RETURN ST_ASText(ST_GeogFromText("POINT(3 8)"));
+-----+
| ST_ASText(ST_GeogFromText("POINT(3 8)")) |
+-----+
| "POINT(3 8)"           |
+-----+

nebula> RETURN ST_ASTEXT(ST_Centroid(ST_GeogFromText("LineString(0 1,1 0)")));
+-----+
| ST_ASTEXT(ST_Centroid(ST_GeogFromText("LineString(0 1,1 0)"))) |
+-----+
| "POINT(0.5000380800773782 0.5000190382261059)" |
+-----+

nebula> RETURN ST_IsValid(ST_GeogFromText("POINT(3 8)"));
+-----+

```

```

| ST_IsValid(ST_GeogFromText("POINT(3 0)")) |
+-----+
| true |
+-----+

nebula> RETURN ST_Intersects(ST_GeogFromText("LineString(0 1,1 0)"),ST_GeogFromText("LineString(0 0,1 1)"));
+-----+
| ST_Intersects(ST_GeogFromText("LineString(0 1,1 0)"),ST_GeogFromText("LineString(0 0,1 1)")) |
+-----+
| true |
+-----+

nebula> RETURN ST_Covers(ST_GeogFromText("POLYGON((0 0,10 0,10 10,0 10,0 0))"),ST_Point(1,2));
+-----+
| ST_Covers(ST_GeogFromText("POLYGON((0 0,10 0,10 10,0 10,0 0))"),ST_Point(1,2)) |
+-----+
| true |
+-----+

nebula> RETURN ST_CoveredBy(ST_Point(1,2),ST_GeogFromText("POLYGON((0 0,10 0,10 10,0 10,0 0 0))"));
+-----+
| ST_CoveredBy(ST_Point(1,2),ST_GeogFromText("POLYGON((0 0,10 0,10 10,0 10,0 0 0))")) |
+-----+
| true |
+-----+

nebula> RETURN ST_dwithin(ST_GeogFromText("Point(0 0)"),ST_GeogFromText("Point(10 10)"),2000000000.0);
+-----+
| ST_dwithin(ST_GeogFromText("Point(0 0)"),ST_GeogFromText("Point(10 10)"),2000000000.0) |
+-----+
| true |
+-----+

nebula> RETURN ST_Distance(ST_GeogFromText("Point(0 0)"),ST_GeogFromText("Point(10 10)"));
+-----+
| ST_Distance(ST_GeogFromText("Point(0 0)"),ST_GeogFromText("Point(10 10)")) |
+-----+
| 1568523.0187677438 |
+-----+

nebula> RETURN S2_CellIdFromPoint(ST_GeogFromText("Point(1 1)"));
+-----+
| S2_CellIdFromPoint(ST_GeogFromText("Point(1 1)")) |
+-----+
| 1153277837650709461 |
+-----+

nebula> RETURN S2_CoveringCellIds(ST_GeogFromText("POLYGON((0 1, 1 2, 2 3, 0 1))"));
+-----+
+
| S2_CoveringCellIds(ST_GeogFromText("POLYGON((0 1, 1 2, 2 3, 0 1))")) |
+-----+
+
| [1152391494368201343, 1153466862374223872, 1153554823304445952, 1153836298281156608, 1153959443583467520, 1154240918560178176, 1160503736791990272, 1160591697722212352] |
+-----+
+

```

Last update: January 14, 2022

4.5.14 User-defined functions

OpenCypher compatibility

User-defined functions (UDF) and storage processes are not yet supported nor designed in Nebula Graph 3.0.0.

Last update: January 14, 2022

4.6 General queries statements

4.6.1 MATCH

The `MATCH` statement supports searching based on pattern matching.

A `MATCH` statement defines a search pattern and uses it to match data stored in Nebula Graph and to retrieve them in the form defined in the `RETURN` clause.

The examples in this topic use the `basketballplayer` dataset as the sample dataset.

Syntax

The syntax of `MATCH` is relatively more flexible compared with that of other query statements such as `GO` or `LOOKUP`. But generally, it can be summarized as follows.

```
MATCH <pattern> [<clause_1>] RETURN <output> [<clause_2>];
```

- `pattern`: For the detailed description of patterns, see [Patterns](#). The `MATCH` statement supports matching one or multiple patterns. Multiple patterns are separated by commas (.). For example: `(a)-[]->(b), (c)-[]->(d)`.
- `clause_1`: The `WHERE`, `WITH`, `UNWIND`, and `OPTIONAL MATCH` clauses are supported, and the `MATCH` clause can also be used.
- `output`: Define the output to be returned. You can rename the output column by using `AS`.
- `clause_2`: The `ORDER BY` and `LIMIT` clauses are supported.

Precautions

Legacy version compatibility

Starting from Nebula Graph version 3.0.0, in order to distinguish the properties of different tags, you need to specify a tag name when querying properties. The original statement `RETURN variable_name.property_name` is changed to `RETURN variable_name.<tag_name>.property_name`.

- The `MATCH` statement retrieves data according to the `RETURN` clause.
- The path type of the `MATCH` statement is `trail`. That is, only vertices can be repeatedly visited in the graph traversal. Edges cannot be repeatedly visited. For details, see [path](#).
- In a valid `MATCH` statement, the VID of a specific vertex must be specified with the `id()` function in the `WHERE` clause. There is no need to create an index.
- When traversing all vertices and edges with `MATCH`, such as `MATCH (v) RETURN v LIMIT N`, there is no need to create an index, but you need to use `LIMIT` to limit the number of output results.
- When traversing all vertices of the specified Tag or edge of the specified Edge Type, such as `MATCH (v:player) RETURN v LIMIT N`, there is no need to create an index, but you need to use `LIMIT` to limit the number of output results.
- In addition to the foregoing, make sure there is at least one index in the `MATCH` statement. How to create native indexes, see [CREATE INDEX](#).

Using patterns in MATCH statements

CREATE INDEXES

```
# The following example creates an index on both the name property of the tag player and the edge type follow.
nebula> CREATE TAG INDEX IF NOT EXISTS name ON player(name(20));
nebula> CREATE EDGE INDEX IF NOT EXISTS follow_index on follow();
```

```
# The following example rebuilds the index.
nebula> REBUILD TAG INDEX name;
+-----+
| New Job Id |
+-----+
| 121        |
+-----+

nebula> REBUILD EDGE INDEX follow_index;
+-----+
| New Job Id |
+-----+
| 122        |
+-----+

# The following example makes sure the index is rebuilt successfully.
nebula> SHOW JOB 121;
+-----+-----+-----+-----+-----+
| Job Id(TaskId) | Command(Dest) | Status | Start Time | Stop Time |
+-----+-----+-----+-----+-----+
| 121            | "REBUILD_TAG_INDEX" | "FINISHED" | 2021-05-27T02:18:02.000000 | 2021-05-27T02:18:02.000000 |
| 0              | "storeded1"        | "FINISHED" | 2021-05-27T02:18:02.000000 | 2021-05-27T02:18:02.000000 |
| 1              | "storeded0"        | "FINISHED" | 2021-05-27T02:18:02.000000 | 2021-05-27T02:18:02.000000 |
| 2              | "storeded2"        | "FINISHED" | 2021-05-27T02:18:02.000000 | 2021-05-27T02:18:02.000000 |
+-----+-----+-----+-----+-----+

nebula> SHOW JOB 122;
+-----+-----+-----+-----+-----+
| Job Id(TaskId) | Command(Dest) | Status | Start Time | Stop Time |
+-----+-----+-----+-----+-----+
| 122            | "REBUILD_EDGE_INDEX" | "FINISHED" | 2021-05-27T02:18:11.000000 | 2021-05-27T02:18:11.000000 |
| 0              | "storeded1"        | "FINISHED" | 2021-05-27T02:18:11.000000 | 2021-05-27T02:18:21.000000 |
| 1              | "storeded0"        | "FINISHED" | 2021-05-27T02:18:11.000000 | 2021-05-27T02:18:21.000000 |
| 2              | "storeded2"        | "FINISHED" | 2021-05-27T02:18:11.000000 | 2021-05-27T02:18:21.000000 |
+-----+-----+-----+-----+-----+
```

MATCH VERTICES

Legacy version compatibility

In Nebula Graph versions earlier than 3.0.0, nGQL does not support `MATCH (v) RETURN v`. As of version 3.0.0, nGQL support `MATCH (v) RETURN v`, there is no need to create an index, but you need to use `LIMIT` to limit the number of output results.

You can use a user-defined variable in a pair of parentheses to represent a vertex in a pattern. For example: `(v)`.

```
nebula> MATCH (v) \
RETURN v \
LIMIT 3;
+-----+
| v |
+-----+
| ("player102" :player{age: 33, name: "LaMarcus Aldridge"}) |
| ("player106" :player{age: 25, name: "Kyle Anderson"}) |
| ("player115" :player{age: 40, name: "Kobe Bryant"}) |
+-----+
```

MATCH TAGS

Note

In Nebula Graph versions earlier than 3.0.0, the prerequisite for matching a tag is that the tag itself has an index or a certain property of the tag has an index. As of version 3.0.0, there is no need to create an index for matching a tag, but you need to use `LIMIT` to limit the number of output results.

You can specify a tag with `:<tag_name>` after the vertex in a pattern.

```
nebula> MATCH (v:player) \
RETURN v;
+-----+
| v |
+-----+
| ("player105" :player{age: 31, name: "Danny Green"}) |
| ("player109" :player{age: 34, name: "Tiago Splitter"}) |
| ("player111" :player{age: 38, name: "David West"}) |
...
+-----+
```

To match vertices with multiple tags, use colons (:).

```

nebula> CREATE TAG actor (name string, age int);
nebula> INSERT VERTEX actor(name, age) VALUES "player100":("Tim Duncan", 42);
nebula> MATCH (v:player:actor) \
  RETURN v \
  LIMIT 10;
+-----+
| v |
+-----+
| ("player100" :actor{age: 42, name: "Tim Duncan"} :player{age: 42, name: "Tim Duncan"}) |
+-----+

```

MATCH VERTEX PROPERTIES

Note

The prerequisite for matching a vertex property is that the tag itself has an index of the corresponding property. Otherwise, you cannot execute the `MATCH` statement to match the property.

You can specify a vertex property with `{<prop_name>: <prop_value>}` after the tag in a pattern.

```

# The following example uses the name property to match a vertex.
nebula> MATCH (v:player{name:"Tim Duncan"}) \
  RETURN v;
+-----+
| v |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
+-----+

```

The `WHERE` clause can do the same thing:

```

nebula> MATCH (v:player) \
  WHERE v.player.name == "Tim Duncan" \
  RETURN v;
+-----+
| v |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
+-----+

```

OpenCypher compatibility

In openCypher 9, `=` is the equality operator. However, in nGQL, `==` is the equality operator and `=` is the assignment operator (as in C++ or Java).

MATCH VIDS

You can use the VID to match a vertex. The `id()` function can retrieve the VID of a vertex.

```

nebula> MATCH (v) \
  WHERE id(v) == 'player101' \
  RETURN v;
+-----+
| v |
+-----+
| ("player101" :player{age: 36, name: "Tony Parker"}) |
+-----+

```

To match multiple VIDs, use `WHERE id(v) IN [vid_list]`.

```

nebula> MATCH (v:player { name: 'Tim Duncan' })--(v2) \
  WHERE id(v2) IN ["player101", "player102"] \
  RETURN v2;
+-----+
| v2 |
+-----+
| ("player101" :player{age: 36, name: "Tony Parker"}) |
| ("player101" :player{age: 36, name: "Tony Parker"}) |
| ("player102" :player{age: 33, name: "LaMarcus Aldridge"}) |
+-----+

```

MATCH CONNECTED VERTICES

You can use the `--` symbol to represent edges of both directions and match vertices connected by these edges.

Legacy version compatibility

In nGQL 1.x, the `--` symbol is used for inline comments. Starting from nGQL 2.x, the `--` symbol represents an incoming or outgoing edge.

```
nebula> MATCH (v:player{name:"Tim Duncan"})--(v2) \
        RETURN v2.player.name AS Name;
+-----+
| Name  |
+-----+
| "Manu Ginobili" |
| "Manu Ginobili" |
| "Tiago Splitter" |
| ...    |
```

You can add a `>` or `<` to the `--` symbol to specify the direction of an edge.

In the following example, `-->` represents an edge that starts from `v` and points to `v2`. To `v`, this is an outgoing edge, and to `v2` this is an incoming edge.

```
nebula> MATCH (v:player{name:"Tim Duncan"})-->(v2:player) \
        RETURN v2.player.name AS Name;
+-----+
| Name  |
+-----+
| "Manu Ginobili" |
| "Tony Parker"   |
+-----+
```

To query the properties of the target vertices, use the `CASE` expression.

```
nebula> MATCH (v:player{name:"Tim Duncan"})--(v2) \
        RETURN \
        CASE WHEN v2.team.name IS NOT NULL \
        THEN v2.team.name \
        WHEN v2.player.name IS NOT NULL \
        THEN v2.player.name END AS Name;
+-----+
| Name  |
+-----+
| "Manu Ginobili" |
| "Manu Ginobili" |
| "Spurs"         |
| "Dejounte Murray" |
| ...            |
```

To extend the pattern, you can add more vertices and edges.

```
nebula> MATCH (v:player{name:"Tim Duncan"})-->(v2)<--(v3) \
        RETURN v3.player.name AS Name;
+-----+
| Name  |
+-----+
| "Dejounte Murray" |
| "LaMarcus Aldridge" |
| "Marco Belinelli" |
| ...            |
```

If you do not need to refer to a vertex, you can omit the variable representing it in the parentheses.

```
nebula> MATCH (v:player{name:"Tim Duncan"})-->()<--(v3) \
        RETURN v3.player.name AS Name;
+-----+
| Name  |
+-----+
| "Dejounte Murray" |
| "LaMarcus Aldridge" |
| "Marco Belinelli" |
| ...            |
```

MATCH PATHS

Connected vertices and edges form a path. You can use a user-defined variable to name a path as follows.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-->(v2) \
        RETURN p;
+-----+
| p     |
+-----+
```

```
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:serve@0 {end_year: 2016, start_year: 1997}]->("team204" :team{name: "Spurs"})> |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})> |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player125" :player{age: 41, name: "Manu Ginobili"})> |
+-----+
```

OpenCypher compatibility

In nGQL, the `@` symbol represents the rank of an edge, but openCypher has no such concept.

MATCH EDGES

OpenCypher compatibility

In Nebula Graph versions earlier than 3.0.0, the prerequisite for matching an edge is that the edge itself has an index or a certain property of the edge has an index. As of version 3.0.0, there is no need to create an index for matching an edge, but you need to use `LIMIT` to limit the number of output results and you must specify the direction of the edge.

```
nebula> MATCH ()<-[e]-() \
        RETURN e \
        LIMIT 3;
+-----+
| e |
+-----+
| [:follow "player101"->"player102" @0 {degree: 90}] |
| [:follow "player103"->"player102" @0 {degree: 70}] |
| [:follow "player135"->"player102" @0 {degree: 80}] |
+-----+
```

MATCH EDGE TYPES

Just like vertices, you can specify edge types with `<edge_type>` in a pattern. For example: `-[e:follow]-`.

OpenCypher compatibility

In Nebula Graph versions earlier than 3.0.0, the prerequisite for matching an edge type is that the edge type itself has an index or a certain property of the edge type has an index. As of version 3.0.0, there is no need to create an index for matching an edge type, but you need to use `LIMIT` to limit the number of output results and you must specify the direction of the edge.

```
nebula> MATCH ()-[e:follow]->() \
        RETURN e \
        limit 3;
+-----+
| e |
+-----+
| [:follow "player102"->"player100" @0 {degree: 75}] |
| [:follow "player102"->"player101" @0 {degree: 75}] |
| [:follow "player129"->"player116" @0 {degree: 90}] |
+-----+

# Before you execute the following statement, you must create an index on the edge type itself or a certain property of the edge type
nebula> MATCH ()-[e:follow]-() \
        RETURN e;
+-----+
| e |
+-----+
| [:follow "player126"->"player116" @0 {degree: 13}] |
| [:follow "player142"->"player117" @0 {degree: 90}] |
| [:follow "player136"->"player117" @0 {degree: 90}] |
| [:follow "player136"->"player148" @0 {degree: 85}] |
...
+-----+
```

MATCH EDGE TYPE PROPERTIES

Note

The prerequisite for matching an edge type property is that the edge type itself has an index of the corresponding property. Otherwise, you cannot execute the `MATCH` statement to match the property.

You can specify edge type properties with `<prop_name>: <prop_value>` in a pattern. For example: `[e:follow{likeness:95}]`.

```
nebula> MATCH (v:player{name:"Tim Duncan"})-[e:follow{degree:95}]->(v2) \
        RETURN e;
+-----+
```

```

| e |
+-----+
| [:follow "player100"->"player101" @0 {degree: 95}] |
| [:follow "player100"->"player125" @0 {degree: 95}] |
+-----+

```

MATCH MULTIPLE EDGE TYPES

The `|` symbol can help matching multiple edge types. For example: `[e:follow|serve]`. The English colon (`:`) before the first edge type cannot be omitted, but the English colon before the subsequent edge type can be omitted, such as `[e:follow|serve]`.

```

nebula> MATCH (v:player{name:"Tim Duncan"})-[e:follow|serve]->(v2) \
        RETURN e;
+-----+
| e |
+-----+
| [:follow "player100"->"player101" @0 {degree: 95}] |
| [:follow "player100"->"player125" @0 {degree: 95}] |
| [:serve "player100"->"team204" @0 {end_year: 2016, start_year: 1997}] |
+-----+

```

MATCH MULTIPLE EDGES

You can extend a pattern to match multiple edges in a path.

```

nebula> MATCH (v:player{name:"Tim Duncan"})-[]->(v2)<-[e:serve]-(v3) \
        RETURN v2, v3;
+-----+
| v2 | v3 |
+-----+
| ("team204" :team{name: "Spurs"}) | ("player104" :player{age: 32, name: "Marco Belinelli"}) |
| ("team204" :team{name: "Spurs"}) | ("player101" :player{age: 36, name: "Tony Parker"}) |
| ("team204" :team{name: "Spurs"}) | ("player102" :player{age: 33, name: "LaMarcus Aldridge"}) |
...

```

MATCH FIXED-LENGTH PATHS

You can use the `<:edge_type*<hop>` pattern to match a fixed-length path. `hop` must be a non-negative integer.

```

nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*2]->(v2) \
        RETURN DISTINCT v2 AS Friends;
+-----+
| Friends |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
| ("player125" :player{age: 41, name: "Manu Ginobili"}) |
| ("player102" :player{age: 33, name: "LaMarcus Aldridge"}) |
+-----+

```

If `hop` is 0, the pattern will match the source vertex of the path.

```

nebula> MATCH (v:player{name:"Tim Duncan"})-[*0]->(v2) \
        RETURN v2;
+-----+
| v2 |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
+-----+

```

Note

When you conditionally filter on multi-hop edges, such as `-[e:follow*2]->`, note that the `e` is a list of edges instead of a single edge.

For example, the following statement is correct from the syntax point of view which may not get your expected query result, because the `e` is a list without the `.degree` property.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*2]->(v2) \
  WHERE e.degree > 1 \
  RETURN DISTINCT v2 AS Friends;
```

The correct statement is as follows:

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*2]->(v2) \
  WHERE ALL(e_ in e WHERE e_.degree > 0) \
  RETURN DISTINCT v2 AS Friends;
```

Further, the following statement is for filtering the properties of the first-hop edge in multi-hop edges:

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*2]->(v2) \
  WHERE e[0].degree > 98 \
  RETURN DISTINCT v2 AS Friends;
```

MATCH VARIABLE-LENGTH PATHS

You can use the `:<edge_type>*[minHop]..<maxHop>` pattern to match variable-length paths.

Parameter	Description
<code>minHop</code>	Optional. It represents the minimum length of the path. <code>minHop</code> must be a non-negative integer. The default value is 1.
<code>maxHop</code>	Required. It represents the maximum length of the path. <code>maxHop</code> must be a non-negative integer. It has no default value.

OpenCypher compatibility

In openCypher, `maxHop` is optional and defaults to infinity. When no bounds are given, `..` can be omitted. However, in nGQL, `maxHop` is required. And `..` cannot be omitted.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*1..3]->(v2) \
  RETURN v2 AS Friends;
+-----+
| Friends |
+-----+
| ("player101" :player{age: 36, name: "Tony Parker"}) |
| ("player125" :player{age: 41, name: "Manu Ginobili"}) |
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
| ... |
```

You can use the `DISTINCT` keyword to aggregate duplicate results.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*1..3]->(v2:player) \
  RETURN DISTINCT v2 AS Friends, count(v2);
+-----+-----+
| Friends | count(v2) |
+-----+-----+
| ("player102" :player{age: 33, name: "LaMarcus Aldridge"}) | 1 |
| ("player100" :player{age: 42, name: "Tim Duncan"}) | 4 |
| ("player101" :player{age: 36, name: "Tony Parker"}) | 3 |
| ("player125" :player{age: 41, name: "Manu Ginobili"}) | 3 |
+-----+-----+
```

If `minHop` is `0`, the pattern will match the source vertex of the path. Compared to the preceding statement, the following example uses `0` as the `minHop`. So in the following result set, `"Tim Duncan"` is counted one more time than it is in the preceding result set because it is the source vertex.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e:follow*0..3]->(v2:player) \
  RETURN DISTINCT v2 AS Friends, count(v2);
+-----+-----+
```

```

| Friends                                     | count(v2) |
+-----+-----+
| ("player102" :player{age: 33, name: "LaMarcus Aldridge"}) | 1          |
| ("player100" :player{age: 42, name: "Tim Duncan"})         | 5          |
| ("player125" :player{age: 41, name: "Manu Ginobili"})      | 3          |
| ("player101" :player{age: 36, name: "Tony Parker"})        | 3          |
+-----+-----+

```

MATCH VARIABLE-LENGTH PATHS WITH MULTIPLE EDGE TYPES

You can specify multiple edge types in a fixed-length or variable-length pattern. In this case, `hop`, `minHop`, and `maxHop` take effect on all edge types.

```

nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e:follow|serve*2]->(v2) \
RETURN DISTINCT v2;
+-----+
| v2                                     |
+-----+
| ("team204" :team{name: "Spurs"})      |
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
| ("team215" :team{name: "Hornets"})    |
| ("player125" :player{age: 41, name: "Manu Ginobili"}) |
| ("player102" :player{age: 33, name: "LaMarcus Aldridge"}) |
+-----+

```

MATCH MULTIPLE PATTERNS

You can separate multiple patterns with commas (,).

```

nebula> MATCH (v1:player{name:"Tim Duncan"}), (v2:team{name:"Spurs"}) \
RETURN v1,v2;
+-----+-----+
| v1                                     | v2          |
+-----+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) | ("team204" :team{name: "Spurs"}) |
+-----+-----+

```

Retrieve with multiple match

Multiple `MATCH` can be used when different patterns have different filtering criteria and return the rows that exactly match the pattern.

```

nebula> MATCH (m)-[]->(n) WHERE id(m)="player100" \
MATCH (n)-[]->(l) WHERE id(n)="player125" \
RETURN id(m),id(n),id(l);
+-----+-----+-----+
| id(m)   | id(n)   | id(l)   |
+-----+-----+-----+
| "player100" | "player125" | "team204" |
| "player100" | "player125" | "player100" |
+-----+-----+-----+

```

Retrieve with optional match

See [OPTIONAL MATCH](#).

Performance

In Nebula Graph, the performance and resource usage of the `MATCH` statement have been optimized. But we still recommend to use `GO`, `LOOKUP`, `|`, and `FETCH` instead of `MATCH` when high performance is required.

Last update: January 18, 2022

4.6.2 OPTIONAL MATCH

The `OPTIONAL MATCH` clause is used to search for the pattern described in it. `OPTIONAL MATCH` matches patterns against your graph database, just like `MATCH` does. The difference is that if no matches are found, `OPTIONAL MATCH` will use a null for missing parts of the pattern.

OpenCypher Compatibility

This topic applies to the openCypher syntax in nGQL only.

Example

The example of the use of `OPTIONAL MATCH` in the `MATCH` statement is as follows:

```
nebula> MATCH (m)-[]->(n) WHERE id(m)=="player100" \
        OPTIONAL MATCH (n)-[]->(l) WHERE id(n)=="player125" \
        RETURN id(m),id(n),id(l);
```

id(m)	id(n)	id(l)
"player100"	"team204"	__NULL__
"player100"	"player101"	__NULL__
"player100"	"player125"	"team204"
"player100"	"player125"	"player100"

Using multiple `MATCH` instead of `OPTIONAL MATCH` returns rows that match the pattern exactly. The example is as follows:

```
nebula> MATCH (m)-[]->(n) WHERE id(m)=="player100" \
        MATCH (n)-[]->(l) WHERE id(n)=="player125" \
        RETURN id(m),id(n),id(l);
```

id(m)	id(n)	id(l)
"player100"	"player125"	"team204"
"player100"	"player125"	"player100"

Last update: January 14, 2022

4.6.3 LOOKUP

The `LOOKUP` statement traverses data based on indexes. You can use `LOOKUP` for the following purposes:

- Search for the specific data based on conditions defined by the `WHERE` clause.
- List vertices with a tag: retrieve the VID of all vertices with a tag.
- List edges with an edge type: retrieve the source vertex IDs, destination vertex IDs, and ranks of all edges with an edge type.
- Count the number of vertices or edges with a tag or an edge type.

OpenCypher compatibility

This topic applies to native nGQL only.

Precautions

- Correct use of indexes can speed up queries, but indexes can dramatically reduce the write performance. The performance reduction can be 90% or even more. **DO NOT** use indexes in production environments unless you are fully aware of their influences on your service.
- If the specified property is not indexed when using the `LOOKUP` statement, Nebula Graph randomly selects one of the available indexes.

For example, the tag `player` has two properties, `name` and `age`. Both the tag `player` itself and the property `name` have indexes, but the property `age` has no indexes. When running `LOOKUP ON player WHERE player.age == 36 YIELD player.name;`, Nebula Graph randomly uses one of the indexes of the tag `player` and the property `name`.

Legacy version compatibility

Before the release 2.5.0, if the specified property is not indexed when using the `LOOKUP` statement, Nebula Graph reports an error and does not use other indexes.

Prerequisites

Before using the `LOOKUP` statement, make sure that at least one index is created. If there are already related vertices, edges, or properties before an index is created, the user must **rebuild the index** after creating the index to make it valid.

Syntax

```
LOOKUP ON {<vertex_tag> | <edge_type>}
[WHERE <expression> [AND <expression> ...]]
YIELD <return_list> [AS <alias>];

<return_list>
  <prop_name> [AS <col_alias>] [, <prop_name> [AS <prop_alias>] ...];
```

- `WHERE <expression>`: filters data with specified conditions. Both `AND` and `OR` are supported between different expressions. For more information, see [WHERE](#).
- `YIELD`: Define the output to be returned. For details, see [YIELD](#).
- `AS`: Set an alias.

Limitations of using WHERE in LOOKUP

The WHERE clause in a LOOKUP statement does not support the following operations:

- \$- and \$^.
- In relational expressions, operators are not supported to have field names on both sides, such as tagName.prop1 > tagName.prop2.
- Nested AliasProp expressions in operation expressions and function expressions are not supported.
- The XOR and NOT operations are not supported.

Retrieve vertices

The following example returns vertices whose name is Tony Parker and the tag is player.

```
nebula> CREATE TAG INDEX IF NOT EXISTS index_player ON player(name(30), age);

nebula> REBUILD TAG INDEX index_player;
+-----+
| New Job Id |
+-----+
| 15         |
+-----+

nebula> LOOKUP ON player \
    WHERE player.name == "Tony Parker" \
    YIELD id(vertex);
+-----+
| id(VERTEX) |
+-----+
| "player101" |
+-----+

nebula> LOOKUP ON player \
    WHERE player.name == "Tony Parker" \
    YIELD properties(vertex).name AS name, properties(vertex).age AS age;
+-----+-----+
| name      | age |
+-----+-----+
| "Tony Parker" | 36 |
+-----+-----+

nebula> LOOKUP ON player \
    WHERE player.age > 45 \
    YIELD id(vertex);
+-----+
| id(VERTEX) |
+-----+
| "player144" |
| "player140" |
+-----+

nebula> LOOKUP ON player \
    WHERE player.name STARTS WITH "B" \
    AND player.age IN [22,30] \
    YIELD properties(vertex).name, properties(vertex).age;
+-----+-----+
| properties(VERTEX).name | properties(VERTEX).age |
+-----+-----+
| "Ben Simmons"          | 22                      |
| "Blake Griffin"        | 30                      |
+-----+-----+

nebula> LOOKUP ON player \
    WHERE player.name == "Kobe Bryant" \
    YIELD id(vertex) AS VertexID, properties(vertex).name AS name \
    GO FROM $-.VertexID OVER serve \
    YIELD $-.name, properties(edge).start_year, properties(edge).end_year, properties($$).name;
+-----+-----+-----+-----+
| $-.name      | properties(EDGE).start_year | properties(EDGE).end_year | properties($$).name |
+-----+-----+-----+-----+
| "Kobe Bryant" | 1996                        | 2016                      | "Lakers"            |
+-----+-----+-----+-----+
```

Retrieve edges

The following example returns edges whose degree is 90 and the edge type is follow.

```
nebula> CREATE EDGE INDEX IF NOT EXISTS index_follow ON follow(degree);

nebula> REBUILD EDGE INDEX index_follow;
+-----+
| New Job Id |
+-----+
```

```

+-----+
| 62      |
+-----+

nebula> LOOKUP ON follow \
      WHERE follow.degree == 90 YIELD edge AS e;
+-----+
| e       |
+-----+
| [:follow "player109"->"player125" @0 {degree: 90}] |
| [:follow "player118"->"player120" @0 {degree: 90}] |
| [:follow "player118"->"player131" @0 {degree: 90}] |
...

nebula> LOOKUP ON follow \
      WHERE follow.degree == 90 \
      YIELD properties(edge).degree;
+-----+
| SrcVID | DstVID | Ranking | properties(EDGE).degree |
+-----+
| "player150" | "player143" | 0 | 90 |
| "player150" | "player137" | 0 | 90 |
| "player148" | "player136" | 0 | 90 |
...

nebula> LOOKUP ON follow \
      WHERE follow.degree == 60 \
      YIELD dst(edge) AS DstVID, properties(edge).degree AS Degree | \
      GO FROM $-.DstVID OVER serve \
      YIELD $-.DstVID, properties(edge).start_year, properties(edge).end_year, properties($$).name;
+-----+
| $-.DstVID | properties(EDGE).start_year | properties(EDGE).end_year | properties($$).name |
+-----+
| "player105" | 2010 | 2018 | "Spurs" |
| "player105" | 2009 | 2010 | "Cavaliers" |
| "player105" | 2018 | 2019 | "Raptors" |
+-----+

```

List vertices or edges with a tag or an edge type

To list vertices or edges with a tag or an edge type, at least one index must exist on the tag, the edge type, or its property.

For example, if there is a `player` tag with a `name` property and an `age` property, to retrieve the VID of all vertices tagged with `player`, there has to be an index on the `player` tag itself, the `name` property, or the `age` property.

- The following example shows how to retrieve the VID of all vertices tagged with `player`.

```
nebula> CREATE TAG IF NOT EXISTS player(name string,age int);

nebula> CREATE TAG INDEX IF NOT EXISTS player_index on player();

nebula> REBUILD TAG INDEX player_index;
+-----+
| New Job Id |
+-----+
| 66         |
+-----+

nebula> INSERT VERTEX player(name,age) \
VALUES "player100":("Tim Duncan", 42), "player101":("Tony Parker", 36);

The following statement retrieves the VID of all vertices with the tag `player`. It is similar to `MATCH (n:player) RETURN id(n) /*, n */`.

nebula> LOOKUP ON player YIELD id(vertex);
+-----+
| id(VERTEX) |
+-----+
| "player100" |
| "player101" |
...
```

- The following example shows how to retrieve the source Vertex IDs, destination vertex IDs, and ranks of all edges of the `follow` edge type.

```
nebula> CREATE EDGE IF NOT EXISTS follow(degree int);

nebula> CREATE EDGE INDEX IF NOT EXISTS follow_index on follow();

nebula> REBUILD EDGE INDEX follow_index;
+-----+
| New Job Id |
+-----+
| 88         |
+-----+

nebula> INSERT EDGE follow(degree) \
VALUES "player100"->"player101":(95);

The following statement retrieves all edges with the edge type `follow`. It is similar to `MATCH (s)-[e:follow]->(d) RETURN id(s), rank(e), id(d) /*, type(e) */`.

nebula> LOOKUP ON follow YIELD edge AS e;
+-----+
| e |
+-----+
| [:follow "player105"->"player100" @0 {degree: 70}] |
| [:follow "player105"->"player116" @0 {degree: 80}] |
| [:follow "player109"->"player100" @0 {degree: 80}] |
...
```

Count the numbers of vertices or edges

The following example shows how to count the number of vertices tagged with `player` and edges of the `follow` edge type.

```
nebula> LOOKUP ON player YIELD id(vertex)|\
YIELD COUNT(*) AS Player_Number;
+-----+
| Player_Number |
+-----+
| 51            |
+-----+

nebula> LOOKUP ON follow YIELD edge AS e| \
YIELD COUNT(*) AS Follow_Number;
+-----+
| Follow_Number |
+-----+
| 81            |
+-----+
```

Note

You can also use `SHOW STATS` to count the numbers of vertices or edges.

Last update: January 14, 2022

4.6.4 GO

GO traverses in a graph with specified filters and returns results.

OpenCypher compatibility

This topic applies to native nGQL only.

Syntax

```
GO [[<M> TO] <N> STEPS ] FROM <vertex_list>
OVER <edge_type_list> [{REVERSELY | BIDIRECT}]
[ WHERE <conditions> ]
YIELD [DISTINCT] <return_list>
[ {SAMPLE <sample_list> | <limit_by_list_clause>} ]
[ | GROUP BY {col_name | expr | position} YIELD <col_name> ]
[ | ORDER BY <expression> [{ASC | DESC}] ]
[ | LIMIT [<offset>,<N>] <number_rows>];

<vertex_list> ::=
    <vid> [, <vid> ...]

<edge_type_list> ::=
    edge_type [, edge_type ...]
    | *
```

```
<return_list> ::=
  <col_name> [AS <col_alias>] [, <col_name> [AS <col_alias>] ...]
```

- **<N> STEPS**: specifies the hop number. If not specified, the default value for **N** is **one**. When **N** is **zero**, Nebula Graph does not traverse any edges and returns nothing.

Note

The path type of the **GO** statement is **walk**, which means both vertices and edges can be repeatedly visited in graph traversal. For more information, see [Path](#).

- **M TO N STEPS**: traverses from **M** to **N** hops. When **M** is **zero**, the output is the same as that of **M** is **one**. That is, the output of **GO 0 TO 2** and **GO 1 TO 2** are the same.
- **<vertex_list>**: represents a list of vertex IDs separated by commas, or a special place holder **\$.id**. For more information, see [Pipe](#).
- **<edge_type_list>**: represents a list of edge types which the traversal can go through.
- **REVERSELY | BIDIRECT**: defines the direction of the query. By default, the **GO** statement searches for outgoing edges of **<vertex_list>**. If **REVERSELY** is set, **GO** searches for incoming edges. If **BIDIRECT** is set, **GO** searches for edges of both directions.
- **WHERE <expression>**: specifies the traversal filters. You can use the **WHERE** clause for the source vertices, the edges, and the destination vertices. You can use it together with **AND**, **OR**, **NOT**, and **XOR**. For more information, see [WHERE](#).

Note

There are some restrictions for the **WHERE** clause when you traverse along with multiple edge types. For example, **WHERE edge1.prop1 > edge2.prop2** is not supported.

- **YIELD [DISTINCT] <return_list>**: defines the output to be returned. It is recommended to use the [Schema function](#) to fill in **<return_list>**. **src(edge)**, **dst(edge)**, **type(edge)**, **rank(edge)**, etc., are currently supported, while nested functions are not. For more information, see [YIELD](#).
- **SAMPLE <sample_list>**: takes samples from the result set. For more information, see [SAMPLE](#).
- **<limit_by_list_clause>**: limits the number of outputs during the traversal process. For more information, see [LIMIT](#).
- **GROUP BY**: groups the output into subgroups based on the value of the specified property. For more information, see [GROUP BY](#). After grouping, you need to use **YIELD** again to define the output that needs to be returned.
- **ORDER BY**: sorts outputs with specified orders. For more information, see [ORDER BY](#).

Note

When the sorting method is not specified, the output orders can be different for the same query.

- **LIMIT [<offset>,] <number_rows>**: limits the number of rows of the output. For more information, see [LIMIT](#).

Examples

```
# The following example returns the teams that player 102 serves.
nebula> GO FROM "player102" OVER serve YIELD dst(edge);
+-----+
| dst(EDGE) |
+-----+
| "team203" |
| "team204" |
+-----+
```

```
# The following example returns the friends of player 102 with 2 hops.
nebula> GO 2 STEPS FROM "player102" OVER follow YIELD dst(edge);
+-----+
| dst(EDGE) |
+-----+
| "player101" |
```



```
| "player125" |
| "player100" |
| "player102" |
| "player125" |
+-----+
```

The following example adds a filter for the traversal.

```
nebula> GO FROM "player100", "player102" OVER serve \
  WHERE properties(edge).start_year > 1995 \
  YIELD DISTINCT properties($$).name AS team_name, properties(edge).start_year AS start_year, properties($^).name AS player_name;
```

```
+-----+
| team_name | start_year | player_name |
+-----+
| "Spurs"   | 1997       | "Tim Duncan" |
| "Trail Blazers" | 2006       | "LaMarcus Aldridge" |
| "Spurs"   | 2015       | "LaMarcus Aldridge" |
+-----+
```

The following example traverses along with multiple edge types. If there is no value for a property, the output is UNKNOWN_PROP.

```
nebula> GO FROM "player100" OVER follow, serve \
  YIELD properties(edge).degree, properties(edge).start_year;
```

```
+-----+
| properties(EDGE).degree | properties(EDGE).start_year |
+-----+
| 95                      | UNKNOWN_PROP                |
| 95                      | UNKNOWN_PROP                |
| UNKNOWN_PROP            | 1997                        |
+-----+
```

The following example returns the neighbor vertices in the incoming direction of player 100.

```
nebula> GO FROM "player100" OVER follow REVERSELY \
  YIELD src(edge) AS destination;
```

```
+-----+
| destination |
+-----+
| "player101" |
| "player102" |
...
```

This MATCH query shares the same semantics with the preceding GO query.

```
nebula> MATCH (v)-[e:follow]- (v2) WHERE id(v) == 'player100' \
  RETURN id(v2) AS destination;
```

```
+-----+
| destination |
+-----+
| "player101" |
| "player102" |
+-----+
...
```

The following example retrieves the friends of player 100 and the teams that they serve.

```
nebula> GO FROM "player100" OVER follow REVERSELY \
  YIELD src(edge) AS id | \
  GO FROM $.id OVER serve \
  WHERE properties($^).age > 20 \
  YIELD properties($^).name AS FriendOf, properties($$).name AS Team;
```

```
+-----+
| FriendOf | Team |
+-----+
| "Boris Diaw" | "Spurs" |
| "Boris Diaw" | "Jazz" |
| "Boris Diaw" | "Suns" |
...
```

This MATCH query shares the same semantics with the preceding GO query.

```
nebula> MATCH (v)-[e:follow]- (v2)-[e2:serve]->(v3) \
  WHERE id(v) == 'player100' \
  RETURN v2.player.name AS FriendOf, v3.team.name AS Team;
```

```
+-----+
| FriendOf | Team |
+-----+
| "Boris Diaw" | "Spurs" |
| "Boris Diaw" | "Jazz" |
| "Boris Diaw" | "Suns" |
...
```

The following example retrieves the friends of player 100 within 1 or 2 hops.

```
nebula> GO 1 TO 2 STEPS FROM "player100" OVER follow \
  YIELD dst(edge) AS destination;
```

```
+-----+
| destination |
+-----+
| "player101" |
| "player125" |
...
```

This MATCH query shares the same semantics with the preceding GO query.

```
nebula> MATCH (v) -[e:follow*1..2]->(v2) \
  WHERE id(v) == "player100" \
```

```

RETURN id(v2) AS destination;
+-----+
| destination |
+-----+
| "player100" |
| "player102" |
| ...         |

```

```

# The following example the outputs according to age.
nebula> GO 2 STEPS FROM "player100" OVER follow \
YIELD src(edge) AS src, dst(edge) AS dst, properties($$).age AS age \
| GROUP BY $-.dst \
YIELD $-.dst AS dst, collect_set($-.src) AS src, collect($-.age) AS age;
+-----+-----+-----+
| dst      | src              | age    |
+-----+-----+-----+
| "player125" | ["player101"]    | [41]   |
| "player100" | ["player125", "player101"] | [42, 42] |
| "player102" | ["player101"]    | [33]   |
+-----+-----+-----+

```

```

# The following example groups the outputs and restricts the number of rows of the outputs.
nebula> $a = GO FROM "player100" OVER follow YIELD src(edge) AS src, dst(edge) AS dst; \
GO 2 STEPS FROM $a.dst OVER follow \
YIELD $a.src AS src, $a.dst, src(edge), dst(edge) \
| ORDER BY $-.src | OFFSET 1 LIMIT 2;
+-----+-----+-----+-----+
| src      | $a.dst          | follow_src | follow_dst |
+-----+-----+-----+-----+
| "player100" | "player125"    | "player100" | "player101" |
| "player100" | "player101"    | "player100" | "player125" |
+-----+-----+-----+-----+

```

```

# The following example determines if $$player.name IS NOT EMPTY.
nebula> GO FROM "player100" OVER follow WHERE properties($$).name IS NOT EMPTY YIELD dst(edge);
+-----+
| follow_dst |
+-----+
| "player125" |
| "player101" |
+-----+

```

Last update: January 18, 2022

4.6.5 FETCH

The `FETCH` statement retrieves the properties of the specified vertices or edges.

OpenCypher Compatibility

This topic applies to native nGQL only.

Fetch vertex properties

SYNTAX

```
FETCH PROP ON {<tag_name>[, tag_name ...] | *}
<vid> [, vid ...]
YIELD <return_list> [AS <alias>];
```

Parameter	Description
<code>tag_name</code>	The name of the tag.
<code>*</code>	Represents all the tags in the current graph space.
<code>vid</code>	The vertex ID.
<code>YIELD</code>	Define the output to be returned. For details, see <code>YIELD</code> .
<code>AS</code>	Set an alias.

FETCH VERTEX PROPERTIES BY ONE TAG

Specify a tag in the `FETCH` statement to fetch the vertex properties by that tag.

```
nebula> FETCH PROP ON player "player100" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 42, name: "Tim Duncan"} |
+-----+
```

FETCH SPECIFIC PROPERTIES OF A VERTEX

Use a `YIELD` clause to specify the properties to be returned.

```
nebula> FETCH PROP ON player "player100" \
      YIELD properties(vertex).name AS name;
+-----+
| name |
+-----+
| "Tim Duncan" |
+-----+
```

FETCH PROPERTIES OF MULTIPLE VERTICES

Specify multiple VIDs (vertex IDs) to fetch properties of multiple vertices. Separate the VIDs with commas.

```
nebula> FETCH PROP ON player "player101", "player102", "player103" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 33, name: "LaMarcus Aldridge"} |
| {age: 40, name: "Tony Parker"} |
| {age: 32, name: "Rudy Gay"} |
+-----+
```

FETCH VERTEX PROPERTIES BY MULTIPLE TAGS

Specify multiple tags in the `FETCH` statement to fetch the vertex properties by the tags. Separate the tags with commas.

```
# The following example creates a new tag t1.
nebula> CREATE TAG IF NOT EXISTS t1(a string, b int);
```

```
# The following example attaches t1 to the vertex "player100".
nebula> INSERT VERTEX t1(a, b) VALUES "player100":("Hello", 100);

# The following example fetches the properties of vertex "player100" by the tags player and t1.
nebula> FETCH PROP ON player, t1 "player100" YIELD vertex AS v;
+-----+
| v      |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"} :t1{a: "Hello", b: 100}) |
+-----+
```

You can combine multiple tags with multiple VIDs in a `FETCH` statement.

```
nebula> FETCH PROP ON player, t1 "player100", "player103" YIELD vertex AS v;
+-----+
| v      |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"} :t1{a: "Hello", b: 100}) |
| ("player103" :player{age: 32, name: "Rudy Gay"}) |
+-----+
```

FETCH VERTEX PROPERTIES BY ALL TAGS

Set an asterisk symbol `*` to fetch properties by all tags in the current graph space.

```
nebula> FETCH PROP ON * "player100", "player106", "team200" YIELD vertex AS v;
+-----+
| v      |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"} :t1{a: "Hello", b: 100}) |
| ("player106" :player{age: 25, name: "Kyle Anderson"}) |
| ("team200" :team{name: "Warriors"}) |
+-----+
```

Fetch edge properties

SYNTAX

```
FETCH PROP ON <edge_type> <src_vid> -> <dst_vid>[@<rank>] [, <src_vid> -> <dst_vid> ...]
YIELD <output>;
```

Parameter	Description
<code>edge_type</code>	The name of the edge type.
<code>src_vid</code>	The VID of the source vertex. It specifies the start of an edge.
<code>dst_vid</code>	The VID of the destination vertex. It specifies the end of an edge.
<code>rank</code>	The rank of the edge. It is optional and defaults to <code>0</code> . It distinguishes an edge from other edges with the same edge type, source vertex, destination vertex, and rank.
<code>YIELD</code>	Define the output to be returned. For details, see YIELD .

FETCH ALL PROPERTIES OF AN EDGE

The following statement fetches all the properties of the `serve` edge that connects vertex `"player100"` and vertex `"team204"`.

```
nebula> FETCH PROP ON serve "player100" -> "team204" YIELD properties(edge);
+-----+
| properties(EDGE) |
+-----+
| {end_year: 2016, start_year: 1997} |
+-----+
```

FETCH SPECIFIC PROPERTIES OF AN EDGE

Use a `YIELD` clause to fetch specific properties of an edge.

```
nebula> FETCH PROP ON serve "player100" -> "team204" \
YIELD properties(edge).start_year;
+-----+
| properties(EDGE).start_year |
+-----+
| 1997 |
+-----+
```

FETCH PROPERTIES OF MULTIPLE EDGES

Specify multiple edge patterns (`<src_vid> -> <dst_vid>[@<rank>]`) to fetch properties of multiple edges. Separate the edge patterns with commas.

```
nebula> FETCH PROP ON serve "player100" -> "team204", "player133" -> "team202" YIELD edge AS e;
+-----+
| e      |
+-----+
| [:serve "player100"->"team204" @0 {end_year: 2016, start_year: 1997}] |
| [:serve "player133"->"team202" @0 {end_year: 2011, start_year: 2002}] |
+-----+
```

Fetch properties based on edge rank

If there are multiple edges with the same edge type, source vertex, and destination vertex, you can specify the rank to fetch the properties on the correct edge.

```
# The following example inserts edges with different ranks and property values.
nebula> insert edge serve(start_year,end_year) \
  values "player100"->"team204"@1:(1998, 2017);

nebula> insert edge serve(start_year,end_year) \
  values "player100"->"team204"@2:(1990, 2018);

# By default, the FETCH statement returns the edge whose rank is 0.
nebula> FETCH PROP ON serve "player100" -> "team204" YIELD edge AS e;
+-----+
| e      |
+-----+
| [:serve "player100"->"team204" @0 {end_year: 2016, start_year: 1997}] |
+-----+

# To fetch on an edge whose rank is not 0, set its rank in the FETCH statement.
nebula> FETCH PROP ON serve "player100" -> "team204"@1 YIELD edge AS e;
+-----+
| e      |
+-----+
| [:serve "player100"->"team204" @1 {end_year: 2017, start_year: 1998}] |
+-----+
```

Use FETCH in composite queries

A common way to use `FETCH` is to combine it with native nGQL such as `GO`.

The following statement returns the `degree` values of the `follow` edges that start from vertex `"player101"`.

```
nebula> GO FROM "player101" OVER follow \
  YIELD src(edge) AS s, dst(edge) AS d \
  | FETCH PROP ON follow $-s -> $-d \
  YIELD properties(edge).degree;
+-----+
| properties(EDGE).degree |
+-----+
| 95                       |
| 90                       |
| 95                       |
+-----+
```

Or you can use user-defined variables to construct similar queries.

```
nebula> $var = GO FROM "player101" OVER follow \
  YIELD src(edge) AS s, dst(edge) AS d; \
  FETCH PROP ON follow $var.s -> $var.d \
  YIELD properties(edge).degree;
+-----+
| properties(EDGE).degree |
+-----+
| 95                       |
| 90                       |
| 95                       |
+-----+
```

For more information about composite queries, see [Composite queries \(clause structure\)](#).

Last update: January 14, 2022

4.6.6 SHOW

SHOW CHARSET

The `SHOW CHARSET` statement shows the available character sets.

Currently available types are `utf8` and `utf8mb4`. The default charset type is `utf8`. Nebula Graph extends the `utf8` to support four-byte characters. Therefore `utf8` and `utf8mb4` are equivalent.

SYNTAX

```
SHOW CHARSET;
```

EXAMPLE

```
nebula> SHOW CHARSET;
+-----+-----+-----+-----+
| Charset | Description | Default collation | Maxlen |
+-----+-----+-----+-----+
| "utf8"  | "UTF-8 Unicode" | "utf8_bin"        | 4      |
+-----+-----+-----+-----+
```

Parameter	Description
Charset	The name of the character set.
Description	The description of the character set.
Default collation	The default collation of the character set.
Maxlen	The maximum number of bytes required to store one character.

Last update: February 8, 2022

SHOW COLLATION

The `SHOW COLLATION` statement shows the collations supported by Nebula Graph.

Currently available types are: `utf8_bin`, `utf8_general_ci`, `utf8mb4_bin`, and `utf8mb4_general_ci`.

- When the character set is `utf8`, the default collate is `utf8_bin`.
- When the character set is `utf8mb4`, the default collate is `utf8mb4_bin`.
- Both `utf8mb4_bin` and `utf8mb4_general_ci` are case-insensitive.

SYNTAX

```
SHOW COLLATION;
```

EXAMPLE

```
nebula> SHOW COLLATION;
+-----+-----+
| Collation | Charset |
+-----+-----+
| "utf8_bin" | "utf8" |
+-----+-----+
```

Parameter	Description
<code>Collation</code>	The name of the collation.
<code>Charset</code>	The name of the character set with which the collation is associated.

Last update: January 14, 2022

SHOW CREATE SPACE

The `SHOW CREATE SPACE` statement shows the creating statement of the specified graph space.

For details about the graph space information, see [CREATE SPACE](#).

SYNTAX

```
SHOW CREATE SPACE <space_name>;
```

EXAMPLE

```

nebula> SHOW CREATE SPACE basketballplayer;
+-----+
+-----+-----+
| Space          | Create                                     |
+-----+-----+
| "basketballplayer" | "CREATE SPACE `basketballplayer` (partition_num = 10, replica_factor = 1, charset = utf8, collate = utf8_bin, vid_type = FIXED_STRING(32)) ON default" |
+-----+-----+

```

Last update: January 14, 2022

SHOW CREATE TAG/EDGE

The `SHOW CREATE TAG` statement shows the basic information of the specified tag. For details about the tag, see [CREATE TAG](#).

The `SHOW CREATE EDGE` statement shows the basic information of the specified edge type. For details about the edge type, see [CREATE EDGE](#).

SYNTAX

```
SHOW CREATE {TAG <tag_name> | EDGE <edge_name>;}
```

EXAMPLES

```
nebula> SHOW CREATE TAG player;
+-----+-----+
| Tag      | Create Tag      |
+-----+-----+
| "player" | "CREATE TAG `player` (  
|          |   `name` string NULL,  
|          |   `age` int64 NULL  
|          | ) ttl_duration = 0, ttl_col = "" |
+-----+-----+

nebula> SHOW CREATE EDGE follow;
+-----+-----+
| Edge      | Create Edge      |
+-----+-----+
| "follow"  | "CREATE EDGE `follow` (  
|          |   `degree` int64 NULL  
|          | ) ttl_duration = 0, ttl_col = "" |
+-----+-----+
```

Last update: January 14, 2022

SHOW HOSTS

The `SHOW HOSTS` statement shows the host and version information of Graph Service, Storage Service, and Meta Service.

SYNTAX

```
SHOW HOSTS [GRAPH | STORAGE | META];
```

Note

For a Nebula Graph cluster installed with the source code, the version of the cluster will not be displayed in the output after executing the command `SHOW HOSTS (GRAPH | STORAGE | META)` with the service name.

EXAMPLES

```
nebula> SHOW HOSTS;
+-----+-----+-----+-----+-----+-----+-----+
| Host      | Port | Status | Leader count | Leader distribution | Partition distribution | Version |
+-----+-----+-----+-----+-----+-----+-----+
| "storaged0" | 9779 | "ONLINE" | 8           | "docs:5, basketballplayer:3" | "docs:5, basketballplayer:3" | "3.0.0" |
| "storaged1" | 9779 | "ONLINE" | 9           | "basketballplayer:4, docs:5" | "docs:5, basketballplayer:4" | "3.0.0" |
| "storaged2" | 9779 | "ONLINE" | 8           | "basketballplayer:3, docs:5" | "docs:5, basketballplayer:3" | "3.0.0" |
+-----+-----+-----+-----+-----+-----+-----+

nebula> SHOW HOSTS GRAPH;
+-----+-----+-----+-----+-----+-----+
| Host      | Port | Status | Role | Git Info Sha | Version |
+-----+-----+-----+-----+-----+-----+
| "graphd"  | 9669 | "ONLINE" | "GRAPH" | "3ba41bd" | "3.0.0" |
| "graphd1" | 9669 | "ONLINE" | "GRAPH" | "3ba41bd" | "3.0.0" |
| "graphd2" | 9669 | "ONLINE" | "GRAPH" | "3ba41bd" | "3.0.0" |
+-----+-----+-----+-----+-----+-----+

nebula> SHOW HOSTS STORAGE;
+-----+-----+-----+-----+-----+-----+
| Host      | Port | Status | Role | Git Info Sha | Version |
+-----+-----+-----+-----+-----+-----+
| "storaged0" | 9779 | "ONLINE" | "STORAGE" | "3ba41bd" | "3.0.0" |
| "storaged1" | 9779 | "ONLINE" | "STORAGE" | "3ba41bd" | "3.0.0" |
| "storaged2" | 9779 | "ONLINE" | "STORAGE" | "3ba41bd" | "3.0.0" |
+-----+-----+-----+-----+-----+-----+

nebula> SHOW HOSTS META;
+-----+-----+-----+-----+-----+-----+
| Host      | Port | Status | Role | Git Info Sha | Version |
+-----+-----+-----+-----+-----+-----+
| "metad2"  | 9559 | "ONLINE" | "META" | "3ba41bd" | "3.0.0" |
| "metad0"  | 9559 | "ONLINE" | "META" | "3ba41bd" | "3.0.0" |
| "metad1"  | 9559 | "ONLINE" | "META" | "3ba41bd" | "3.0.0" |
+-----+-----+-----+-----+-----+-----+
```

Last update: February 10, 2022

SHOW INDEX STATUS

The `SHOW INDEX STATUS` statement shows the status of jobs that rebuild native indexes, which helps check whether a native index is successfully rebuilt or not.

SYNTAX

```
SHOW {TAG | EDGE} INDEX STATUS;
```

EXAMPLES

```
nebula> SHOW TAG INDEX STATUS;
+-----+-----+
| Name                                | Index Status |
+-----+-----+
| "date1_index"                      | "FINISHED"   |
| "basketballplayer_all_tag_indexes" | "FINISHED"   |
| "any_shape_geo_index"              | "FINISHED"   |
+-----+-----+

nebula> SHOW EDGE INDEX STATUS;
+-----+-----+
| Name                                | Index Status |
+-----+-----+
| "follow_index"                     | "FINISHED"   |
+-----+-----+
```

RELATED TOPICS

- [Job manager and the JOB statements](#)
- [REBUILD NATIVE INDEX](#)

Last update: January 14, 2022

SHOW INDEXES

The `SHOW INDEXES` statement shows the names of existing native indexes.

SYNTAX

```
SHOW {TAG | EDGE} INDEXES;
```

EXAMPLES

```
nebula> SHOW TAG INDEXES;
+-----+-----+-----+
| Index Name | By Tag | Columns |
+-----+-----+-----+
| "fix"      | "fix_string" | ["p1"] |
| "player_index_0" | "player" | ["name"] |
| "player_index_1" | "player" | ["name", "age"] |
| "var"      | "var_string" | ["p1"] |
+-----+-----+-----+

nebula> SHOW EDGE INDEXES;
+-----+-----+-----+
| Index Name | By Edge | Columns |
+-----+-----+-----+
| "follow_index" | "follow" | [] |
+-----+-----+-----+
```

Legacy version compatibility

In Nebula Graph 2.x, `SHOW TAG/EDGE INDEXES` only returns `Names`.

Last update: February 8, 2022

SHOW PARTS

The `SHOW PARTS` statement shows the information of a specified partition or all partitions in a graph space.

SYNTAX

```
SHOW PARTS [<part_id>];
```

EXAMPLES

```
nebula> SHOW PARTS;
+-----+-----+-----+
| Partition ID | Leader           | Peers           | Losts |
+-----+-----+-----+
| 1            | "192.168.2.1:9779" | "192.168.2.1:9779" | ""    |
| 2            | "192.168.2.2:9779" | "192.168.2.2:9779" | ""    |
| 3            | "192.168.2.3:9779" | "192.168.2.3:9779" | ""    |
| 4            | "192.168.2.1:9779" | "192.168.2.1:9779" | ""    |
| 5            | "192.168.2.2:9779" | "192.168.2.2:9779" | ""    |
| 6            | "192.168.2.3:9779" | "192.168.2.3:9779" | ""    |
| 7            | "192.168.2.1:9779" | "192.168.2.1:9779" | ""    |
| 8            | "192.168.2.2:9779" | "192.168.2.2:9779" | ""    |
| 9            | "192.168.2.3:9779" | "192.168.2.3:9779" | ""    |
| 10           | "192.168.2.1:9779" | "192.168.2.1:9779" | ""    |
+-----+-----+-----+

nebula> SHOW PARTS 1;
+-----+-----+-----+
| Partition ID | Leader           | Peers           | Losts |
+-----+-----+-----+
| 1            | "192.168.2.1:9779" | "192.168.2.1:9779" | ""    |
+-----+-----+-----+
```

The descriptions are as follows.

Parameter	Description
Partition ID	The ID of the partition.
Leader	The IP address and the port of the leader.
Peers	The IP addresses and the ports of all the replicas.
Losts	The IP addresses and the ports of replicas at fault.

Last update: January 14, 2022

SHOW ROLES

The `SHOW ROLES` statement shows the roles that are assigned to a user account.

The return message differs according to the role of the user who is running this statement:

- If the user is a `GOD` or `ADMIN` and is granted access to the specified graph space, Nebula Graph shows all roles in this graph space except for `GOD`.
- If the user is a `DBA`, `USER`, or `GUEST` and is granted access to the specified graph space, Nebula Graph shows the user's own role in this graph space.
- If the user does not have access to the specified graph space, Nebula Graph returns `PermissionError`.

For more information about roles, see [Roles and privileges](#).

SYNTAX

```
SHOW ROLES IN <space_name>;
```

EXAMPLE

```
nebula> SHOW ROLES in basketballplayer;
+-----+-----+
| Account | Role Type |
+-----+-----+
| "user1" | "ADMIN"   |
+-----+-----+
```

Last update: January 14, 2022

SHOW SNAPSHOTS

The `SHOW SNAPSHOTS` statement shows the information of all the snapshots.

For how to create a snapshot and backup data, see [Snapshot](#).

ROLE REQUIREMENT

Only the `root` user who has the `GOB` role can use the `SHOW SNAPSHOTS` statement.

SYNTAX

```
SHOW SNAPSHOTS;
```

EXAMPLE

```
nebulia> SHOW SNAPSHOTS;
+-----+-----+-----+
| Name                               | Status | Hosts                               |
+-----+-----+-----+
| "SNAPSHOT_2020_12_16_11_13_55"    | "VALID" | "stored0:9779, stored1:9779, stored2:9779" |
| "SNAPSHOT_2020_12_16_11_14_10"    | "VALID" | "stored0:9779, stored1:9779, stored2:9779" |
+-----+-----+-----+
```

Last update: January 14, 2022

SHOW SPACES

The `SHOW SPACES` statement shows existing graph spaces in Nebula Graph.

For how to create a graph space, see [CREATE SPACE](#).

SYNTAX

```
SHOW SPACES;
```

EXAMPLE

```
nebula> SHOW SPACES;
+-----+
| Name          |
+-----+
| "docs"        |
| "basketballplayer" |
+-----+
```

Last update: January 14, 2022

SHOW STATS

The `SHOW STATS` statement shows the statistics of the graph space collected by the latest `STATS` job.

The statistics include the following information:

- The number of vertices in the graph space
- The number of edges in the graph space
- The number of vertices of each tag
- The number of edges of each edge type

PREREQUISITES

You have to run the `SUBMIT JOB STATS` statement in the graph space where you want to collect statistics. For more information, see [SUBMIT JOB STATS](#).

Caution

The result of the `SHOW STATS` statement is based on the last executed `SUBMIT JOB STATS` statement. If you want to update the result, run `SUBMIT JOB STATS` again. Otherwise the statistics will be wrong.

SYNTAX

```
SHOW STATS;
```

EXAMPLES

```
# Choose a graph space.
nebula> USE basketballplayer;

# Start SUBMIT JOB STATS.
nebula> SUBMIT JOB STATS;
+-----+
| New Job Id |
+-----+
| 98         |
+-----+

# Make sure the job executes successfully.
nebula> SHOW JOB 98;
+-----+-----+-----+-----+-----+
| Job Id(TaskId) | Command(Dest) | Status   | Start Time           | Stop Time           |
+-----+-----+-----+-----+-----+
| 98             | "STATS"       | "FINISHED" | 2021-11-01T09:33:21.000000 | 2021-11-01T09:33:21.000000 |
| 0              | "storaged2"   | "FINISHED" | 2021-11-01T09:33:21.000000 | 2021-11-01T09:33:21.000000 |
| 1              | "storaged0"   | "FINISHED" | 2021-11-01T09:33:21.000000 | 2021-11-01T09:33:21.000000 |
| 2              | "storaged1"   | "FINISHED" | 2021-11-01T09:33:21.000000 | 2021-11-01T09:33:21.000000 |
+-----+-----+-----+-----+-----+

# Show the statistics of the graph space.
nebula> SHOW STATS;
+-----+-----+-----+
| Type   | Name      | Count |
+-----+-----+-----+
| "Tag"  | "player"  | 51    |
| "Tag"  | "team"    | 30    |
| "Edge" | "follow"  | 81    |
| "Edge" | "serve"   | 152   |
| "Space" | "vertices" | 81    |
| "Space" | "edges"   | 233   |
+-----+-----+-----+
```

Last update: January 14, 2022

SHOW TAGS/EDGES

The `SHOW TAGS` statement shows all the tags in the current graph space.

The `SHOW EDGES` statement shows all the edge types in the current graph space.

SYNTAX

```
SHOW {TAGS | EDGES};
```

EXAMPLES

```
nebula> SHOW TAGS;
+-----+
| Name  |
+-----+
| "player" |
| "star"  |
| "team"  |
+-----+

nebula> SHOW EDGES;
+-----+
| Name  |
+-----+
| "follow" |
| "serve"  |
+-----+
```

Last update: January 14, 2022

SHOW USERS

The `SHOW USERS` statement shows the user information.

ROLE REQUIREMENT

Only the `root` user who has the `GOD` role can use the `SHOW USERS` statement.

SYNTAX

```
SHOW USERS;
```

EXAMPLE

```
nebula> SHOW USERS;
+-----+
| Account |
+-----+
| "root"  |
| "user1" |
+-----+
```

Last update: January 14, 2022

SHOW SESSIONS

When a user logs in to the database, a corresponding session will be created and users can query for session information.

The `SHOW SESSIONS` statement shows the information of all the sessions. It can also show a specified session with its ID.

PRECAUTIONS

- The client will call the API `release` to release the session and clear the session information when you run `exit` after the operation ends. If you exit the database in an unexpected way and the session timeout duration is not set via `session_idle_timeout_secs` in `nebula-graphd.conf`, the session will not be released automatically. For those sessions that are not automatically released, you need to delete them manually (TODO: coding).
- `SHOW SESSIONS` queries the session information of all the Graph services.
- `SHOW LOCAL SESSIONS` queries the session information of the currently connected Graph service and does not query the session information of other Graph services.
- `SHOW SESSION <Session_Id>` queries the session information with a specific session id.

SYNTAX

```
SHOW [LOCAL] SESSIONS;
SHOW SESSION <Session_Id>;
```

EXAMPLES

```
nebula> SHOW SESSIONS;
+-----+-----+-----+-----+-----+-----+-----+-----+
| SessionId | UserName | SpaceName | CreateTime | UpdateTime | GraphAddr | Timezone | ClientIp |
+-----+-----+-----+-----+-----+-----+-----+-----+
| 1635128818397714 | "root" | "test" | 2021-10-25T02:26:58.397714 | 2021-10-25T08:31:31.846846 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1635254859271703 | "root" | "basketballplayer" | 2021-10-26T13:27:39.271703 | 2021-10-26T13:51:38.277704 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1634871229727322 | "root" | "basketballplayer" | 2021-10-22T02:53:49.727322 | 2021-10-22T02:53:56.564001 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1635750725840229 | "root" | "basketballplayer" | 2021-11-01T07:12:05.840229 | 2021-11-01T09:42:36.883617 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1635299224732060 | "root" | "basketballplayer" | 2021-10-27T01:47:04.732060 | 2021-10-27T09:04:31.741126 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1634628999765689 | "root" | "" | 2021-10-19T07:36:39.765689 | 2021-10-19T07:36:39.768064 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1634886296595136 | "root" | "basketballplayer" | 2021-10-22T07:04:56.595136 | 2021-10-22T09:48:20.299364 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1634629179882439 | "root" | "basketballplayer" | 2021-10-19T07:39:39.882439 | 2021-10-19T09:34:52.153145 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1635246158961634 | "root" | "basketballplayer" | 2021-10-26T11:02:38.961634 | 2021-10-26T11:02:51.250897 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
| 1634785346839017 | "root" | "basketballplayer" | 2021-10-21T03:02:26.839017 | 2021-10-21T11:07:40.911329 | "127.0.0.1:9669" | 0 | "::ffff:127.0.0.1" |
+-----+-----+-----+-----+-----+-----+-----+-----+

nebula> SHOW SESSION 1635254859271703;
+-----+-----+
| VariableName | Value |
+-----+-----+
| "SessionID" | 1635254859271703 |
| "UserName" | "root" |
| "SpaceName" | "basketballplayer" |
| "CreateTime" | 2021-10-26T13:27:39.271703 |
| "UpdateTime" | 2021-10-26T13:51:38.277704 |
| "GraphAddr" | "127.0.0.1:9669" |
| "Timezone" | 0 |
+-----+-----+
```

```
| "ClientIp" | ">::ffff:127.0.0.1" |
+-----+-----+
```

Parameter	Description
SessionId	The session ID, namely the identifier of a session.
UserName	The username in a session.
SpaceName	The name of the graph space that the user uses currently. It is null ("") when you first log in because there is no specified graph space.
CreateTime	The time when the session is created, namely the time when the user logs in. The time zone is specified by <code>timezone_name</code> in the configuration file.
UpdateTime	The system will update the time when there is an operation. The time zone is specified by <code>timezone_name</code> in the configuration file.
GraphAddr	The IP address and port of the Graph server that hosts the session.
Timezone	A reserved parameter that has no specified meaning for now.
ClientIp	The IP address of the client.

Last update: January 14, 2022

SHOW QUERIES

The `SHOW QUERIES` statement shows the information of working queries in the current session.

Note

To terminate queries, see [Kill Query](#).

PRECAUTIONS

- The `SHOW LOCAL QUERIES` statement gets the status of queries in the current session from the local cache with almost no latency.
- The `SHOW QUERIES` statement gets the information of queries in all the sessions from the Meta Service. The information will be synchronized to the Meta Service according to the interval defined by `session_reclaim_interval_secs`. Therefore the information that you get from the client may belong to the last synchronization interval.

SYNTAX

```
SHOW [LOCAL] QUERIES;
```

EXAMPLES

```
nebula> SHOW LOCAL QUERIES;
+-----+-----+-----+-----+-----+-----+-----+-----+
| SessionID | ExecutionPlanID | User | Host | StartTime | DurationInUsec | Status | Query |
+-----+-----+-----+-----+-----+-----+-----+-----+
| 1625463842921750 | 46 | "root" | ""192.168.x.x":9669" | 2021-07-05T05:44:19.502903 | 0 | "RUNNING" | "SHOW QUERIES;" |
+-----+-----+-----+-----+-----+-----+-----+-----+

nebula> SHOW QUERIES;
+-----+-----+-----+-----+-----+-----+-----+-----+
| SessionID | ExecutionPlanID | User | Host | StartTime | DurationInUsec | Status | Query |
+-----+-----+-----+-----+-----+-----+-----+-----+
| 1625456037718757 | 54 | "user1" | ""192.168.x.x":9669" | 2021-07-05T05:51:08.691318 | 1504502 | "RUNNING" | "MATCH p=(v:player)-[*1..4]-(v2)
RETURN v2 AS Friends;" |
+-----+-----+-----+-----+-----+-----+-----+-----+

# The following statement returns the top 10 queries that have the longest duration.
nebula> SHOW QUERIES | ORDER BY $.DurationInUsec DESC | LIMIT 10;
+-----+-----+-----+-----+-----+-----+-----+-----+
| SessionID | ExecutionPlanID | User | Host | StartTime | DurationInUsec | Status | Query |
+-----+-----+-----+-----+-----+-----+-----+-----+
| 1625471375320831 | 98 | "user2" | ""192.168.x.x":9669" | 2021-07-05T07:50:24.461779 | 2608176 | "RUNNING" | "MATCH (v:player)-[*1..4]-(v2)
RETURN v2 AS Friends;" |
| 1625456037718757 | 99 | "user1" | ""192.168.x.x":9669" | 2021-07-05T07:50:24.910616 | 2159333 | "RUNNING" | "MATCH (v:player)-[*1..4]-(v2)
RETURN v2 AS Friends;" |
+-----+-----+-----+-----+-----+-----+-----+-----+
```

The descriptions are as follows.

Parameter	Description
<code>SessionID</code>	The session ID.
<code>ExecutionPlanID</code>	The ID of the execution plan.
<code>User</code>	The username that executes the query.
<code>Host</code>	The IP address and port of the Graph server that hosts the session.
<code>StartTime</code>	The time when the query starts.
<code>DurationInUsec</code>	The duration of the query. The unit is microsecond.
<code>Status</code>	The current status of the query.
<code>Query</code>	The query statement.

Last update: January 14, 2022

SHOW META LEADER

The `SHOW META LEADER` statement shows the information of the leader in the current Meta cluster.

For more information about the Meta service, see [Meta service](#).

SYNTAX

```
SHOW META LEADER;
```

EXAMPLE

```
nebula> SHOW META LEADER;
+-----+-----+
| Meta Leader | secs from last heart beat |
+-----+-----+
| "127.0.0.1:9559" | 3 |
+-----+-----+
```

Parameter	Description
<code>Meta Leader</code>	Shows the information of the leader in the Meta cluster, including the IP address and port of the server where the leader is located.
<code>secs from last heart beat</code>	Indicates the time interval since the last heartbeat. This parameter is measured in seconds.

Last update: January 14, 2022

4.7 Clauses and options

4.7.1 GROUP BY

The `GROUP BY` clause can be used to aggregate data.

OpenCypher Compatibility

This topic applies to native nGQL only.

You can also use the `count()` function to aggregate data.

```
nebula> MATCH (v:player)-[:follow]-(:player) RETURN v.player.name AS Name, count(*) as cnt ORDER BY cnt DESC;
+-----+-----+
| Name          | cnt |
+-----+-----+
| "Tim Duncan"  | 10  |
| "LeBron James"| 6   |
| "Tony Parker" | 5   |
| "Chris Paul"  | 4   |
| "Manu Ginobili"| 4   |
+-----+-----+
...
```

Syntax

The `GROUP BY` clause groups the rows with the same value. Then operations such as counting, sorting, and calculation can be applied.

The `GROUP BY` clause works after the pipe symbol (`|`) and before a `YIELD` clause.

```
| GROUP BY <var> YIELD <var>, <aggregation_function(var)>
```

The `aggregation_function()` function supports `avg()`, `sum()`, `max()`, `min()`, `count()`, `collect()`, and `std()`.

Examples

The following statement finds all the vertices connected directly to vertex `"player100"`, groups the result set by player names, and counts how many times the name shows up in the result set.

```
nebula> GO FROM "player100" OVER follow BIDIRECT \
  YIELD properties($$).name as Name \
  | GROUP BY $-.Name \
  YIELD $-.Name as Player, count(*) AS Name_Count;
+-----+-----+
| Player          | Name_Count |
+-----+-----+
| "Shaquille O'Neal"| 1          |
| "Tiago Splitter"  | 1          |
| "Manu Ginobili"   | 2          |
| "Boris Diaw"      | 1          |
| "LaMarcus Aldridge"| 1         |
| "Tony Parker"     | 2          |
| "Marco Belinelli" | 1          |
| "Dejounte Murray" | 1          |
| "Danny Green"     | 1          |
| "Aron Baynes"     | 1          |
+-----+-----+
```

Group and calculate with functions

The following statement finds all the vertices connected directly to vertex `"player100"`, groups the result set by source vertices, and returns the sum of degree values.

```
nebula> GO FROM "player100" OVER follow \
  YIELD src(edge) AS player, properties(edge).degree AS degree \
  | GROUP BY $-.player \
  YIELD sum($-.degree);
```

```
+-----+  
| sum($-.degree) |  
+-----+  
| 190             |  
+-----+
```

For more information about the `sum()` function, see [Built-in math functions](#).

Last update: January 14, 2022

4.7.2 LIMIT AND SKIP

The `LIMIT` clause constrains the number of rows in the output. The usage of `LIMIT` in native nGQL statements and openCypher compatible statements is different.

- Native nGQL: Generally, a pipe `|` needs to be used before the `LIMIT` clause. The offset parameter can be set or omitted directly after the `LIMIT` statement.
- OpenCypher compatible statements: No pipes are permitted before the `LIMIT` clause. And you can use `SKIP` to indicate an offset.

Note

When using `LIMIT` in either syntax above, it is important to use an `ORDER BY` clause that constrains the output into a unique order. Otherwise, you will get an unpredictable subset of the output.

Legacy version compatibility

In Nebula Graph 2.6.0, `GO` statements support the new `LIMIT` syntax. Some operators related to `LIMIT` support computing pushdown.

LIMIT in native nGQL statements

In native nGQL, `LIMIT` has general syntax and exclusive syntax in `GO` statements.

GENERAL LIMIT SYNTAX IN NATIVE NGQL STATEMENTS

In native nGQL, the general `LIMIT` syntax works the same as in `SQL`. The `LIMIT` clause accepts one or two parameters. The values of both parameters must be non-negative integers and be used after a pipe. The syntax and description are as follows:

```
... | LIMIT [<offset>,<number_rows>];
```

Parameter	Description
<code>offset</code>	The offset value. It defines the row from which to start returning. The offset starts from <code>0</code> . The default value is <code>0</code> , which returns from the first row.
<code>number_rows</code>	It constrains the total number of returned rows.

For example:

```
# The following example returns the top 3 rows of data from the result.
nebula> LOOKUP ON player YIELD id(vertex)|\
      LIMIT 3;
+-----+
| id(VERTEX) |
+-----+
| "player100" |
| "player101" |
| "player102" |
+-----+

# The following example returns the 3 rows of data starting from the second row of the sorted output.
nebula> GO FROM "player100" OVER follow REVERSELY \
      YIELD properties($$).name AS Friend, properties($$).age AS Age \
      | ORDER BY $-.Age, $-.Friend \
      | LIMIT 1, 3;
+-----+-----+
| Friend          | Age |
+-----+-----+
| "Danny Green"   | 31  |
| "Aron Baynes"   | 32  |
| "Marco Belinelli" | 32  |
+-----+-----+
```

LIMIT IN GO STATEMENTS


In addition to the general syntax in the native nGQL, the `LIMIT` in the `GO` statement also supports limiting the number of output results based on edges.

Syntax:

```
<go_statement> LIMIT <limit_list>;
```

`limit_list` is a list. Elements in the list must be natural numbers, and the number of elements must be the same as the maximum number of `STEPS` in the `GO` statement. The following takes `GO 1 TO 3 STEPS FROM "A" OVER * LIMIT <limit_list>` as an example to introduce this usage of `LIMIT` in detail.

- The list `limit_list` must contain 3 natural numbers, such as `GO 1 TO 3 STEPS FROM "A" OVER * LIMIT [1,2,4]`.
- `1` in `LIMIT [1,2,4]` means that the system automatically selects 1 edge to continue traversal in the first step. `2` means to select 2 edges to continue traversal in the second step. `4` indicates that 4 edges are selected to continue traversal in the third step.
- Because `GO 1 TO 3 STEPS` means to return all the traversal results from the first to third steps, all the red edges and their source and destination vertices in the figure below will be matched by this `GO` statement. And the yellow edges represent there is no path selected when the `GO` statement traverses. If it is not `GO 1 TO 3 STEPS` but `GO 3 STEPS`, it will only match the red edges of the third step and the vertices at both ends.

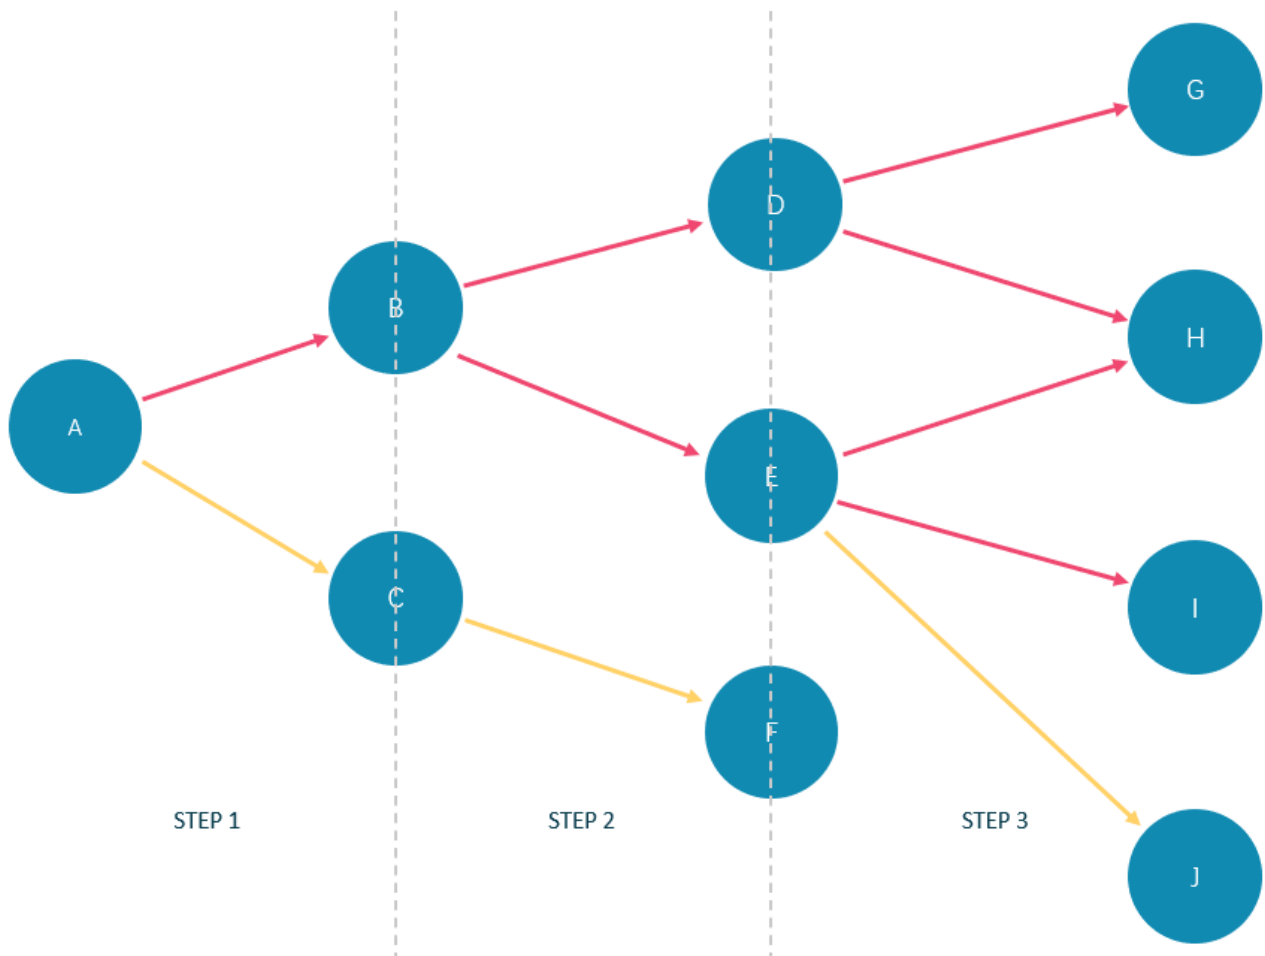

In the basketballplayer dataset, the example is as follows:

```
nebula> GO 3 STEPS FROM "player100" \
  OVER * \
  YIELD properties($$).name AS NAME, properties($$).age AS Age \
  LIMIT [3,3,3];
```

NAME	Age
"Spurs"	UNKNOWN_PROP
"Tony Parker"	36

```

| "Manu Ginobili" | 41 |
+-----+
nebula> GO 3 STEPS FROM "player102" OVER * \
      YIELD dst(edge) \
      LIMIT [rand32(5),rand32(5),rand32(5)];
+-----+
| dst(EDGE) |
+-----+
| "team204" |
| "team215" |
| "player100" |
| "player102" |
+-----+

```

LIMIT in openCypher compatible statements

In openCypher compatible statements such as `MATCH`, there is no need to use a pipe when `LIMIT` is used. The syntax and description are as follows:

```
... [SKIP <offset>] [LIMIT <number_rows>];
```

Parameter	Description
<code>offset</code>	The offset value. It defines the row from which to start returning. The offset starts from <code>0</code> . The default value is <code>0</code> , which returns from the first row.
<code>number_rows</code>	It constrains the total number of returned rows.

Both `offset` and `number_rows` accept expressions, but the result of the expression must be a non-negative integer.

Note

Fraction expressions composed of two integers are automatically floored to integers. For example, `8/6` is floored to `1`.

EXAMPLES OF LIMIT

`LIMIT` can be used alone to return a specified number of results.

```

nebula> MATCH (v:player) RETURN v.player.name AS Name, v.player.age AS Age \
      ORDER BY Age LIMIT 5;
+-----+
| Name | Age |
+-----+
| "Luka Doncic" | 20 |
| "Ben Simmons" | 22 |
| "Kristaps Porzingis" | 23 |
| "Giannis Antetokounmpo" | 24 |
| "Kyle Anderson" | 25 |
+-----+

nebula> MATCH (v:player) RETURN v.player.name AS Name, v.player.age AS Age \
      ORDER BY Age LIMIT rand32(5);
+-----+
| Name | Age |
+-----+
| "Luka Doncic" | 20 |
| "Ben Simmons" | 22 |
| "Kristaps Porzingis" | 23 |
| "Giannis Antetokounmpo" | 24 |
+-----+

```

EXAMPLES OF SKIP

`SKIP` can be used alone to set the offset and return the data after the specified position.

```

nebula> MATCH (v:player{name:"Tim Duncan"}) --> (v2) \
      RETURN v2.player.name AS Name, v2.player.age AS Age \
      ORDER BY Age DESC SKIP 1;
+-----+
| Name | Age |
+-----+
| "Manu Ginobili" | 41 |
| "Tony Parker" | 36 |
+-----+

nebula> MATCH (v:player{name:"Tim Duncan"}) --> (v2) \
      RETURN v2.player.name AS Name, v2.player.age AS Age \

```

```
ORDER BY Age DESC SKIP 1+1;
+-----+-----+
| Name           | Age |
+-----+-----+
| "Tony Parker"  | 36  |
+-----+-----+
```

EXAMPLE OF SKIP AND LIMIT

`SKIP` and `LIMIT` can be used together to return the specified amount of data starting from the specified position.

```
nebula> MATCH (v:player{name:"Tim Duncan"}) --> (v2) \
RETURN v2.player.name AS Name, v2.player.age AS Age \
ORDER BY Age DESC SKIP 1 LIMIT 1;
+-----+-----+
| Name           | Age |
+-----+-----+
| "Manu Ginobili" | 41  |
+-----+-----+
```

Last update: January 14, 2022

4.7.3 SAMPLE


The `SAMPLE` clause takes samples evenly in the result set and returns the specified amount of data.

`SAMPLE` can be used in `GO` statements only. The syntax is as follows:

```
<go_statement> SAMPLE <sample_list>;
```

`sample_list` is a list. Elements in the list must be natural numbers, and the number of elements must be the same as the maximum number of `STEPS` in the `GO` statement. The following takes `GO 1 TO 3 STEPS FROM "A" OVER * SAMPLE <sample_list>` as an example to introduce this usage of `SAMPLE` in detail.

- The list `sample_list` must contain 3 natural numbers, such as `GO 1 TO 3 STEPS FROM "A" OVER * SAMPLE [1,2,4]`.
- `1` in `SAMPLE [1,2,4]` means that the system automatically selects 1 edge to continue traversal in the first step. `2` means to select 2 edges to continue traversal in the second step. `4` indicates that 4 edges are selected to continue traversal in the third step. If there is no matched edge in a certain step or the number of matched edges is less than the specified number, the actual number will be returned.
- Because `GO 1 TO 3 STEPS` means to return all the traversal results from the first to third steps, all the red edges and their source and destination vertices in the figure below will be matched by this `GO` statement. And the yellow edges represent there is no path selected when the `GO` statement traverses. If it is not `GO 1 TO 3 STEPS` but `GO 3 STEPS`, it will only match the red edges of the third step and the vertices at both ends.

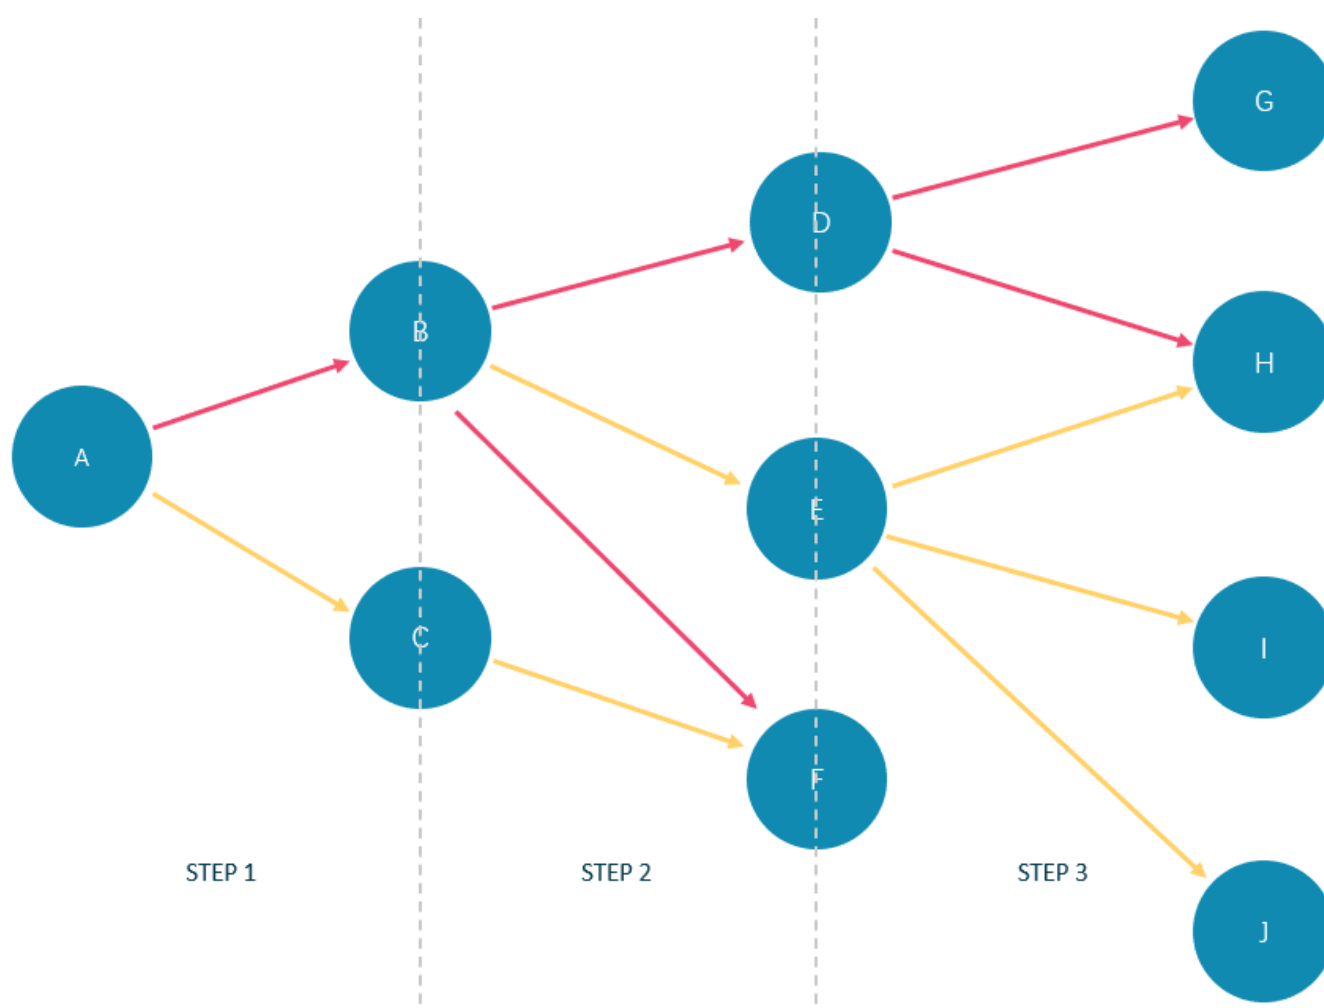

In the basketballplayer dataset, the example is as follows:

```
nebula> GO 3 STEPS FROM "player100" \
OVER * \
```

```

YIELD properties($$).name AS NAME, properties($$).age AS Age \
SAMPLE [1,2,3];
+-----+
| NAME           | Age |
+-----+
| "Spurs"         | UNKNOWN_PROP |
| "Tony Parker"   | 36   |
| "Manu Ginobili" | 41   |
+-----+

nebula> GO 1 TO 3 STEPS FROM "player100" \
OVER * \
YIELD properties($$).name AS NAME, properties($$).age AS Age \
SAMPLE [2,2,2];
+-----+
| NAME           | Age |
+-----+
| "Manu Ginobili" | 41   |
| "Tony Parker"   | 36   |
| "Tim Duncan"    | 42   |
| "LaMarcus Aldridge" | 33   |
| "Tony Parker"   | 36   |
| "Tim Duncan"    | 42   |
+-----+

```

Last update: January 18, 2022

4.7.4 ORDER BY

The `ORDER BY` clause specifies the order of the rows in the output.

- Native nGQL: You must use a pipe (`|`) and an `ORDER BY` clause after `YIELD` clause.
- OpenCypher style: No pipes are permitted. The `ORDER BY` clause follows a `RETURN` clause.

There are two order options:

- `ASC` : Ascending. `ASC` is the default order.
- `DESC` : Descending.

Native nGQL Syntax

```
<YIELD clause>
ORDER BY <expression> [ASC | DESC] [, <expression> [ASC | DESC] ...];
```

Compatibility

In the native nGQL syntax, `$-` must be used after `ORDER BY`. But it is not required in releases prior to 2.5.0.

EXAMPLES

```
nebula> FETCH PROP ON player "player100", "player101", "player102", "player103" \
      YIELD player.age AS age, player.name AS name \
      | ORDER BY $-.age ASC, $-.name DESC;

+-----+
| age | name |
+-----+
| 32 | "Rudy Gay" |
| 33 | "LaMarcus Aldridge" |
| 36 | "Tony Parker" |
| 42 | "Tim Duncan" |
+-----+

nebula> $var = GO FROM "player100" OVER follow \
      YIELD dst(edge) AS dst; \
      ORDER BY $var.dst DESC;

+-----+
| dst |
+-----+
| "player125" |
| "player101" |
+-----+
```

OpenCypher Syntax

```
<RETURN clause>
ORDER BY <expression> [ASC | DESC] [, <expression> [ASC | DESC] ...];
```

EXAMPLES

```
nebula> MATCH (v:player) RETURN v.player.name AS Name, v.player.age AS Age \
      ORDER BY Name DESC;

+-----+
| Name | Age |
+-----+
| "Yao Ming" | 38 |
| "Vince Carter" | 42 |
| "Tracy McGrady" | 39 |
| "Tony Parker" | 36 |
| "Tim Duncan" | 42 |
+-----+
...

# In the following example, nGQL sorts the rows by age first. If multiple people are of the same age, nGQL will then sort them by name.
nebula> MATCH (v:player) RETURN v.player.age AS Age, v.player.name AS Name \
      ORDER BY Age DESC, Name ASC;

+-----+
| Age | Name |
+-----+
| 47 | "Shaquille O'Neal" |
| 46 | "Grant Hill" |
| 45 | "Jason Kidd" |
+-----+
```

```
| 45 | "Steve Nash" |
+-----+
...
```

Order of NULL values

nGQL lists NULL values at the end of the output for ascending sorting, and at the start for descending sorting.

```
nebula> MATCH (v:player{name:"Tim Duncan"}) --> (v2) \
RETURN v2.player.name AS Name, v2.player.age AS Age \
ORDER BY Age;
+-----+
| Name          | Age |
+-----+
| "Tony Parker" | 36  |
| "Manu Ginobili" | 41  |
| "Spurs"       | UNKNOWN_PROP |
+-----+

nebula> MATCH (v:player{name:"Tim Duncan"}) --> (v2) \
RETURN v2.player.name AS Name, v2.player.age AS Age \
ORDER BY Age DESC;
+-----+
| Name          | Age |
+-----+
| "Spurs"       | UNKNOWN_PROP |
| "Manu Ginobili" | 41  |
| "Tony Parker" | 36  |
+-----+
```

Last update: January 14, 2022

4.7.5 RETURN

The `RETURN` clause defines the output of an nGQL query. To return multiple fields, separate them with commas.

`RETURN` can lead a clause or a statement:

- A `RETURN` clause can work in openCypher statements in nGQL, such as `MATCH` or `UNWIND`.
- A `RETURN` statement can work independently to output the result of an expression.

OpenCypher compatibility

This topic applies to the openCypher syntax in nGQL only. For native nGQL, use `YIELD`.

`RETURN` does not support the following openCypher features yet.

- Return variables with uncommon characters, for example:

```
MATCH (`non-english_characters`:player) \
RETURN `non-english_characters`;
```

- Set a pattern in the `RETURN` clause and return all elements that this pattern matches, for example:

```
MATCH (v:player) \
RETURN (v)-[e]->(v2);
```

Map order description

When `RETURN` returns the map data structure, the order of key-value pairs is undefined.

```
nebula> RETURN {age: 32, name: "Marco Belinelli"};
+-----+
| {age:32,name:"Marco Belinelli"} |
+-----+
| {age: 32, name: "Marco Belinelli"} |
+-----+

nebula> RETURN {zage: 32, name: "Marco Belinelli"};
+-----+
| {zage:32,name:"Marco Belinelli"} |
+-----+
| {name: "Marco Belinelli", zage: 32} |
+-----+
```

Return vertices

```
nebula> MATCH (v:player) \
RETURN v;
+-----+
| v |
+-----+
| ("player104" :player{age: 32, name: "Marco Belinelli"}) |
| ("player107" :player{age: 32, name: "Aron Baynes"}) |
| ("player116" :player{age: 34, name: "LeBron James"}) |
| ("player120" :player{age: 29, name: "James Harden"}) |
| ("player125" :player{age: 41, name: "Manu Ginobili"}) |
+-----+
...
```

Return edges

```
nebula> MATCH (v:player)-[e]->() \
RETURN e;
+-----+
| e |
+-----+
| [[:follow "player104"->"player100" @0 {degree: 55}] |
| [[:follow "player104"->"player101" @0 {degree: 50}] |
| [[:follow "player104"->"player105" @0 {degree: 60}] |
| [[:serve "player104"->"team200" @0 {end_year: 2009, start_year: 2007}] |
| [[:serve "player104"->"team208" @0 {end_year: 2016, start_year: 2015}] |
```

```
+-----+
...
+-----+
```

RETURN VIDS

Use the `id()` function to retrieve VIDs.

```
nebula> MATCH (v:player{name:"Tim Duncan"}) \
          RETURN id(v);
+-----+
| id(v)      |
+-----+
| "player100" |
+-----+
```

RETURN TAG

Use the `labels()` function to return the list of tags on a vertex.

```
nebula> MATCH (v:player{name:"Tim Duncan"}) \
          RETURN labels(v);
+-----+
| labels(v)  |
+-----+
| ["player"] |
+-----+
```

To retrieve the *nth* element in the `labels(v)` list, use `labels(v)[n-1]`. The following example shows how to use `labels(v)[0]` to return the first tag in the list.

```
nebula> MATCH (v:player{name:"Tim Duncan"}) \
          RETURN labels(v)[0];
+-----+
| labels(v)[0] |
+-----+
| "player"      |
+-----+
```

Return properties

To return a vertex or edge property, use the `{<vertex_name>|<edge_name>}.<property>` syntax.

```
nebula> MATCH (v:player) \
          RETURN v.player.name, v.player.age \
          LIMIT 3;
+-----+
| v.player.name | v.player.age |
+-----+
| "Danny Green" | 31           |
| "Tiago Splitter" | 34          |
| "David West"   | 38          |
+-----+
```

Use the `properties()` function to return all properties on a vertex or an edge.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-[]->(v2) \
          RETURN properties(v2);
+-----+
| properties(v2) |
+-----+
| {name: "Spurs"} |
| {age: 36, name: "Tony Parker"} |
| {age: 41, name: "Manu Ginobili"} |
+-----+
```

Return edge type

Use the `type()` function to return the matched edge types.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})-[e]->( ) \
          RETURN DISTINCT type(e);
+-----+
| type(e) |
+-----+
| "serve"  |
| "follow" |
+-----+
```

RETURN PATHS

Use `RETURN <path_name>` to return all the information of the matched paths.

```

nebula> MATCH p=(v:player{name:"Tim Duncan"})-[*3]->() \
RETURN p;
+-----+
+
+
|
p
|
+-----+
+
|
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})-[:follow@0 {degree: 90}]-
| >("player102" :player{age: 33, name: "LaMarcus Aldridge"})-[:serve@0 {end_year: 2019, start_year: 2015}]->("team204" :team{name: "Spurs"})> |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})-[:follow@0 {degree: 90}]-
| >("player102" :player{age: 33, name: "LaMarcus Aldridge"})-[:serve@0 {end_year: 2015, start_year: 2006}]->("team203" :team{name: "Trail Blazers"})> |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})-[:follow@0 {degree: 90}]-
| >("player102" :player{age: 33, name: "LaMarcus Aldridge"})-[:follow@0 {degree: 75}]->("player101" :player{age: 36, name: "Tony Parker"})> |
+-----+
+
+
+

```

RETURN VERTICES IN A PATH

Use the `nodes()` function to return all vertices in a path.

```

nebula> MATCH p=(v:player{name:"Tim Duncan"})-[]->(v2) \
        RETURN nodes(p);
+-----+
| nodes(p) |
+-----+
| [{"player100":star:{player{age: 42, name: "Tim Duncan"}}, ("player204":team{name: "Spurs"})}] |
| [{"player100":star:{player{age: 42, name: "Tim Duncan"}}, ("player101":player{name: "Tony Parker", age: 36})}] |
| [{"player100":star:{player{age: 42, name: "Tim Duncan"}}, ("player125":player{name: "Manu Ginobili", age: 41})}] |

```

RETURN EDGES IN A PATH

Use the `relationships()` function to return all edges in a path.

```

nebula> MATCH p=(v:player{name:"Tim Duncan"})-[]->(v2) \
RETURN relationships(p);
+-----+
| relationships(p) |
+-----+
| [[:serve "player100"->"team204"] @0 {end_year: 2016, start_year: 1997}]] |
| [[:follow "player100"->"player101"] @0 {degree: 95}]] |
| [[:follow "player100"->"player125"] @0 {degree: 95}]] |
+-----+

```

RETURN PATH LENGTH

Use the `length()` function to return the length of a path.

```

nebula> MATCH p=(v:player{name:"Tim Duncan"})-[*..2]->(v2) \
RETURN p AS Paths, length(p) AS Length;
+-----+
|
| Paths
| Length |
+-----+
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:serve@0 {end_year: 2016, start_year: 1997}]->("team204" :team{name:
"Spurs"})> | 1 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony
Parker"})> | 1 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player125" :player{age: 41, name: "Manu
Ginobili"})> | 1 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})-[:serve@0 {end_year: 2018,
start_year: 1999}]->("team204" :team{name: "Spurs"})> | 2 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})-[:serve@0 {end_year: 2019,
start_year: 2018}]->("team215" :team{name: "Hornets"})> | 2 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})-[:follow@0 {degree: 95}]-
>("player100" :player{age: 42, name: "Tim Duncan"})> | 2 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})-[:follow@0 {degree: 90}]-
>("player102" :player{age: 33, name: "LaMarcus Aldridge"})> | 2 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player101" :player{age: 36, name: "Tony Parker"})-[:follow@0 {degree: 95}]-
>("player125" :player{age: 41, name: "Manu Ginobili"})> | 2 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player125" :player{age: 41, name: "Manu Ginobili"})-[:serve@0 {end_year: 2018,
start_year: 2002}]->("team204" :team{name: "Spurs"})> | 2 |
| <("player100" :player{age: 42, name: "Tim Duncan"})-[:follow@0 {degree: 95}]->("player125" :player{age: 41, name: "Manu Ginobili"})-[:follow@0 {degree: 90}]-
>("player100" :player{age: 42, name: "Tim Duncan"})> | 2 |
+-----+

```

Return all elements

To return all the elements that this pattern matches, use an asterisk (*).

```

nebula> MATCH (v:player{name:"Tim Duncan"}) \
RETURN *;
+-----+
| v |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
+-----+

nebula> MATCH (v:player{name:"Tim Duncan"})-[e]->(v2) \
RETURN *;
+-----+
+-----+
| v | e |
+-----+
| v2 | |
+-----+
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) | [:follow "player100"->"player101" @0 {degree: 95}] | ("player101" :player{age: 36, name:
"Tony Parker"}) |
| ("player100" :player{age: 42, name: "Tim Duncan"}) | [:follow "player100"->"player125" @0 {degree: 95}] | ("player125" :player{age: 41, name:
"Manu Ginobili"}) |
| ("player100" :player{age: 42, name: "Tim Duncan"}) | [:serve "player100"->"team204" @0 {end_year: 2016, start_year: 1997}] | ("team204" :team{name:
"Spurs"}) |
+-----+
+-----+

```

Rename a field

Use the `AS <alias>` syntax to rename a field in the output.

```

nebula> MATCH (v:player{name:"Tim Duncan"})-[:serve]->(v2) \
RETURN v2.team.name AS Team;
+-----+
| Team |
+-----+
| "Spurs" |
+-----+

nebula> RETURN "Amber" AS Name;
+-----+
| Name |
+-----+
| "Amber" |
+-----+

```

Return a non-existing property

If a property matched does not exist, `NULL` is returned.

```
nebula> MATCH (v:player{name:"Tim Duncan"})-[e]->(v2) \
RETURN v2.player.name, type(e), v2.player.age;
+-----+
| v2.player.name | type(e) | v2.player.age |
+-----+
| "Manu Ginobili" | "follow" | 41             |
| __NULL__       | "serve"  | __NULL__       |
| "Tony Parker"  | "follow" | 36             |
+-----+
```

Return expression results

To return the results of expressions such as literals, functions, or predicates, set them in a `RETURN` clause.

```
nebula> MATCH (v:player{name:"Tony Parker"})-->(v2:player) \
RETURN DISTINCT v2.player.name, "Hello"+" graphs!", v2.player.age > 35;
+-----+
| v2.player.name | ("Hello"+" graphs!") | (v2.player.age>35) |
+-----+
| "LaMarcus Aldridge" | "Hello graphs!"      | false              |
| "Tim Duncan"        | "Hello graphs!"      | true                |
| "Manu Ginobili"     | "Hello graphs!"      | true                |
+-----+

nebula> RETURN 1+1;
+-----+
| (1+1) |
+-----+
| 2     |
+-----+

nebula> RETURN 3 > 1;
+-----+
| (3>1) |
+-----+
| true  |
+-----+

nebula> RETURN 1+1, rand32(1, 5);
+-----+
| (1+1) | rand32(1,5) |
+-----+
| 2     | 1            |
+-----+
```

Return unique fields

Use `DISTINCT` to remove duplicate fields in the result set.

```
# Before using DISTINCT.
nebula> MATCH (v:player{name:"Tony Parker"})-->(v2:player) \
RETURN v2.player.name, v2.player.age;
+-----+
| v2.player.name | v2.player.age |
+-----+
| "Manu Ginobili" | 41             |
| "Boris Diaw"    | 36             |
| "Marco Belinelli" | 32             |
| "Dejounte Murray" | 29             |
| "Tim Duncan"    | 42             |
| "Tim Duncan"    | 42             |
| "LaMarcus Aldridge" | 33             |
| "LaMarcus Aldridge" | 33             |
+-----+

# After using DISTINCT.
nebula> MATCH (v:player{name:"Tony Parker"})-->(v2:player) \
RETURN DISTINCT v2.player.name, v2.player.age;
+-----+
| v2.player.name | v2.player.age |
+-----+
| "Manu Ginobili" | 41             |
| "Boris Diaw"    | 36             |
| "Marco Belinelli" | 32             |
| "Dejounte Murray" | 29             |
| "Tim Duncan"    | 42             |
| "LaMarcus Aldridge" | 33             |
+-----+
```

Last update: February 8, 2022

4.7.6 TTL

TTL (Time To Live) specifies a timeout for a property. Once timed out, the property expires.

OpenCypher Compatibility

This topic applies to native nGQL only.

Precautions

- You CANNOT modify a property schema with TTL options on it.
- TTL options and indexes have coexistence issues.
- TTL options and indexes CANNOT coexist on a tag or an edge type. If there is an index on a property, you cannot set TTL options on other properties.
- If there are TTL options on a tag, an edge type, or a property, you can still add an index on them.

Data expiration and deletion

VERTEX PROPERTY EXPIRATION

Vertex property expiration has the following impact.

- If a vertex has only one tag, once a property of the vertex expires, the vertex expires.
- If a vertex has multiple tags, once a property of the vertex expires, properties bound to the same tag with the expired property also expire, but the vertex does not expire and other properties of it remain untouched.

EDGE PROPERTY EXPIRATION

Since an edge can have only one edge type, once an edge property expires, the edge expires.

DATA DELETION

The expired data are still stored on the disk, but queries will filter them out.

Nebula Graph automatically deletes the expired data and reclaims the disk space during the next **compaction**.

Note

If TTL is **disabled**, the corresponding data deleted after the last compaction can be queried again.

TTL options

The native nGQL TTL feature has the following options.

Option	Description
<code>ttl_col</code>	Specifies the property to set a timeout on. The data type of the property must be <code>int</code> or <code>timestamp</code> .
<code>ttl_duration</code>	Specifies the timeout adds-on value in seconds. The value must be a non-negative int64 number. A property expires if the sum of its value and the <code>ttl_duration</code> value is smaller than the current timestamp. If the <code>ttl_duration</code> value is <code>0</code> , the property never expires.

Use TTL options

You must use the TTL options together to set a valid timeout on a property.

SET A TIMEOUT IF A TAG OR AN EDGE TYPE EXISTS

If a tag or an edge type is already created, to set a timeout on a property bound to the tag or edge type, use `ALTER` to update the tag or edge type.

```
# Create a tag.
nebula> CREATE TAG IF NOT EXISTS t1 (a timestamp);

# Use ALTER to update the tag and set the TTL options.
nebula> ALTER TAG t1 ttl_col = "a", ttl_duration = 5;

# Insert a vertex with tag t1. The vertex expires 5 seconds after the insertion.
nebula> INSERT VERTEX t1(a) values "101":(now());
```

SET A TIMEOUT WHEN CREATING A TAG OR AN EDGE TYPE

Use TTL options in the `CREATE` statement to set a timeout when creating a tag or an edge type. For more information, see [CREATE TAG](#) and [CREATE EDGE](#).

```
# Create a tag and set the TTL options.
nebula> CREATE TAG IF NOT EXISTS t2(a int, b int, c string) ttl_duration= 100, ttl_col = "a";

# Insert a vertex with tag t2. The timeout timestamp is 1612778164774 (1612778164674 + 100).
nebula> INSERT VERTEX t2(a, b, c) values "102":(1612778164674, 30, "Hello");
```

Remove a timeout

To disable TTL and remove the timeout on a property, you can use the following approaches.

- Drop the property with the timeout.

```
nebula> ALTER TAG t1 DROP (a);
```

- Set `ttl_col` to an empty string.

```
nebula> ALTER TAG t1 ttl_col = "";
```

- Set `ttl_duration` to `0`. This operation keeps the TTL options and prevents the property from expiring and the property schema from being modified.

```
nebula> ALTER TAG t1 ttl_duration = 0;
```

Last update: February 8, 2022

4.7.7 WHERE

The `WHERE` clause filters the output by conditions.

The `WHERE` clause usually works in the following queries:

- Native nGQL: such as `GO` and `LOOKUP`.
- OpenCypher syntax: such as `MATCH` and `WITH`.

OpenCypher compatibility

- Using patterns in `WHERE` is not supported (TODO: planning), for example `WHERE (v)-->(v2)`.
- **Filtering on edge rank** is a native nGQL feature. To retrieve the rank value in openCypher statements, use the `rank()` function, such as `MATCH (:player)-[e:follow]->() RETURN rank(e);`.

Basic usage

Note

In the following examples, `$$` and `^` are reference operators. For more information, see [Operators](#).

DEFINE CONDITIONS WITH BOOLEAN OPERATORS

Use the boolean operators `NOT`, `AND`, `OR`, and `XOR` to define conditions in `WHERE` clauses. For the precedence of the operators, see [Precedence](#).

```
nebula> MATCH (v:player) \
  WHERE v.player.name == "Tim Duncan" \
  XOR (v.player.age < 30 AND v.player.name == "Yao Ming") \
  OR NOT (v.player.name == "Yao Ming" OR v.player.name == "Tim Duncan") \
  RETURN v.player.name, v.player.age;
+-----+-----+
| v.player.name | v.player.age |
+-----+-----+
| "Danny Green" | 31           |
| "Tiago Splitter" | 34          |
| "David West"   | 38           |
| ...           |              |
```

```
nebula> GO FROM "player100" \
  OVER follow \
  WHERE properties(edge).degree > 90 \
  OR properties($$).age != 33 \
  AND properties($$).name != "Tony Parker" \
  YIELD properties($$);
+-----+-----+
| properties($$) |
+-----+-----+
| {age: 41, name: "Manu Ginobili"} |
+-----+-----+
```

FILTER ON PROPERTIES

Use vertex or edge properties to define conditions in `WHERE` clauses.

- Filter on a vertex property:

```
nebula> MATCH (v:player)-[e]->(v2) \
  WHERE v2.player.age < 25 \
  RETURN v2.player.name, v2.player.age;
```

v2.player.name	v2.player.age
"Ben Simmons"	22
"Luka Doncic"	20
"Kristaps Porzingis"	23

```
nebula> GO FROM "player100" OVER follow \
  WHERE $^.player.age >= 42 \
  YIELD dst(edge);
```

dst(EDGE)
"player101"
"player125"

- Filter on an edge property:

```
nebula> MATCH (v:player)-[e]->() \
  WHERE e.start_year < 2000 \
  RETURN DISTINCT v.player.name, v.player.age;
```

v.player.name	v.player.age
"Tony Parker"	36
"Tim Duncan"	42
"Grant Hill"	46

```
nebula> GO FROM "player100" OVER follow \
  WHERE follow.degree > 90 \
  YIELD dst(edge);
```

dst(EDGE)
"player101"
"player125"

FILTER ON DYNAMICALLY-CALCULATED PROPERTIES

```
nebula> MATCH (v:player) \
  WHERE v[toLowerCase("AGE")] < 21 \
  RETURN v.player.name, v.player.age;
```

v.name	v.age
"Luka Doncic"	20

FILTER ON EXISTING PROPERTIES

```
nebula> MATCH (v:player) \
  WHERE exists(v.player.age) \
  RETURN v.player.name, v.player.age;
```

v.player.name	v.player.age
"Danny Green"	31
"Tiago Splitter"	34
"David West"	38

FILTER ON EDGE RANK

In nGQL, if a group of edges has the same source vertex, destination vertex, and properties, the only thing that distinguishes them is the rank. Use rank conditions in `WHERE` clauses to filter such edges.

```
# The following example creates test data.
nebula> CREATE SPACE IF NOT EXISTS test (vid_type=FIXED_STRING(30));
nebula> USE test;
```

```

nebula> CREATE EDGE IF NOT EXISTS e1(p1 int);
nebula> CREATE TAG IF NOT EXISTS person(p1 int);
nebula> INSERT VERTEX person(p1) VALUES "1":(1);
nebula> INSERT VERTEX person(p1) VALUES "2":(2);
nebula> INSERT EDGE e1(p1) VALUES "1"->"2"@0:(10);
nebula> INSERT EDGE e1(p1) VALUES "1"->"2"@1:(11);
nebula> INSERT EDGE e1(p1) VALUES "1"->"2"@2:(12);
nebula> INSERT EDGE e1(p1) VALUES "1"->"2"@3:(13);
nebula> INSERT EDGE e1(p1) VALUES "1"->"2"@4:(14);
nebula> INSERT EDGE e1(p1) VALUES "1"->"2"@5:(15);
nebula> INSERT EDGE e1(p1) VALUES "1"->"2"@6:(16);

```

```

# The following example use rank to filter edges and retrieves edges with a rank greater than 2.
nebula> GO FROM "1" \
  OVER e1 \
  WHERE rank(edge) > 2 \
  YIELD src(edge), dst(edge), rank(edge) AS Rank, properties(edge).p1 | \
  ORDER BY $-.Rank DESC;

```

src(EDGE)	dst(EDGE)	Rank	properties(EDGE).p1
"1"	"2"	6	16
"1"	"2"	5	15
"1"	"2"	4	14
"1"	"2"	3	13

Filter on strings

Use `STARTS WITH`, `ENDS WITH`, or `CONTAINS` in `WHERE` clauses to match a specific part of a string. String matching is case-sensitive.

STARTS WITH

`STARTS WITH` will match the beginning of a string.

The following example uses `STARTS WITH "T"` to retrieve the information of players whose name starts with `T`.

```

nebula> MATCH (v:player) \
  WHERE v.player.name STARTS WITH "T" \
  RETURN v.player.name, v.player.age;

```

v.player.name	v.player.age
"Tony Parker"	36
"Tiago Splitter"	34
"Tim Duncan"	42
"Tracy McGrady"	39

If you use `STARTS WITH "t"` in the preceding statement, an empty set is returned because no name in the dataset starts with the lowercase `t`.

```

nebula> MATCH (v:player) \
  WHERE v.player.name STARTS WITH "t" \
  RETURN v.player.name, v.player.age;
Empty set (time spent 5080/6474 us)

```

ENDS WITH

`ENDS WITH` will match the ending of a string.

The following example uses `ENDS WITH "r"` to retrieve the information of players whose name ends with `r`.

```

nebula> MATCH (v:player) \
  WHERE v.player.name ENDS WITH "r" \
  RETURN v.player.name, v.player.age;

```

v.player.name	v.player.age
"Tony Parker"	36
"Tiago Splitter"	34
"Vince Carter"	42

CONTAINS

`CONTAINS` will match a certain part of a string.

The following example uses `CONTAINS "Pa"` to match the information of players whose name contains `Pa`.

```

nebula> MATCH (v:player) \
    WHERE v.player.name CONTAINS "Pa" \
    RETURN v.player.name, v.player.age;
+-----+-----+
| v.player.name | v.player.age |
+-----+-----+
| "Paul George" | 28           |
| "Tony Parker" | 36           |
| "Paul Gasol"  | 38           |
| "Chris Paul"  | 33           |
+-----+-----+

```

NEGATIVE STRING MATCHING

You can use the boolean operator `NOT` to negate a string matching condition.

```

nebula> MATCH (v:player) \
    WHERE NOT v.player.name ENDS WITH "R" \
    RETURN v.player.name, v.player.age;
+-----+-----+
| v.player.name | v.player.age |
+-----+-----+
| "Danny Green" | 31           |
| "Tiago Splitter" | 34          |
| "David West"   | 38           |
| "Russell Westbrook" | 30          |
...

```

Filter on lists

MATCH VALUES IN A LIST

Use the `IN` operator to check if a value is in a specific list.

```

nebula> MATCH (v:player) \
    WHERE v.player.age IN range(20,25) \
    RETURN v.player.name, v.player.age;
+-----+-----+
| v.player.name | v.player.age |
+-----+-----+
| "Ben Simmons" | 22           |
| "Giannis Antetokounmpo" | 24          |
| "Kyle Anderson" | 25           |
| "Joel Embiid"   | 25           |
| "Kristaps Porzingis" | 23          |
| "Luka Doncic"  | 20           |
+-----+-----+

nebula> LOOKUP ON player \
    WHERE player.age IN [25,28] \
    YIELD properties(vertex).name, properties(vertex).age;
+-----+-----+
| properties(VERTEX).name | properties(VERTEX).age |
+-----+-----+
| "Kyle Anderson"         | 25                     |
| "Damian Lillard"        | 28                     |
| "Joel Embiid"           | 25                     |
| "Paul George"           | 28                     |
| "Ricky Rubio"           | 28                     |
+-----+-----+

```

MATCH VALUES NOT IN A LIST

Use `NOT` before `IN` to rule out the values in a list.

```

nebula> MATCH (v:player) \
    WHERE v.player.age NOT IN range(20,25) \
    RETURN v.player.name AS Name, v.player.age AS Age \
    ORDER BY Age;
+-----+-----+
| Name | Age |
+-----+-----+
| "Kyrie Irving" | 26 |
| "Cory Joseph"  | 27 |
| "Damian Lillard" | 28 |
| "Paul George"  | 28 |
| "Ricky Rubio"  | 28 |
...

```

Last update: January 14, 2022

4.7.8 YIELD

`YIELD` defines the output of an nGQL query.

`YIELD` can lead a clause or a statement:

- A `YIELD` clause works in nGQL statements such as `GO`, `FETCH`, or `LOOKUP` and must be defined to return the result.
- A `YIELD` statement works in a composite query or independently.

OpenCypher compatibility

This topic applies to native nGQL only. For the openCypher syntax, use `RETURN`.

`YIELD` has different functions in openCypher and nGQL.

- In openCypher, `YIELD` is used in the `CALL[...YIELD]` clause to specify the output of the procedure call.

Note

nGQL does not support `CALL[...YIELD]` yet.

- In nGQL, `YIELD` works like `RETURN` in openCypher.

Note

In the following examples, `$$` and `$-` are reference operators. For more information, see [Operators](#).

YIELD clauses

SYNTAX

```
YIELD [DISTINCT] <col> [AS <alias>] [, <col> [AS <alias>] ...];
```

Parameter	Description
<code>DISTINCT</code>	Aggregates the output and makes the statement return a distinct result set.
<code>col</code>	A field to be returned. If no alias is set, <code>col</code> will be a column name in the output.
<code>alias</code>	An alias for <code>col</code> . It is set after the keyword <code>AS</code> and will be a column name in the output.

USE A YIELD CLAUSE IN A STATEMENT

- Use `YIELD` with `GO`:

```
nebula> GO FROM "player100" OVER follow \
  YIELD properties($$).name AS Friend, properties($$).age AS Age;
+-----+-----+
| Friend | Age |
+-----+-----+
| "Tony Parker" | 36 |
```



```
+-----+
| string1 | string2 |
+-----+
| "Hel    lo" | ", World!" |
+-----+

nebula> YIELD hash("Tim") % 100;
+-----+
| (hash(Tim)%100) |
+-----+
| 42               |
+-----+

nebula> YIELD \
CASE 2+3 \
WHEN 4 THEN 0 \
WHEN 5 THEN 1 \
ELSE -1 \
END \
AS result;
+-----+
| result |
+-----+
| 1       |
+-----+
```

Last update: January 14, 2022

4.7.9 WITH

The `WITH` clause can retrieve the output from a query part, process it, and pass it to the next query part as the input.

OpenCypher compatibility

This topic applies to openCypher syntax only.

Note

`WITH` has a similar function with the `Pipe` symbol in native nGQL, but they work in different ways. DO NOT use pipe symbols in the openCypher syntax or use `WITH` in native nGQL statements.

Combine statements and form a composite query

Use a `WITH` clause to combine statements and transfer the output of a statement as the input of another statement.

EXAMPLE 1

The following statement:

1. Matches a path.
2. Outputs all the vertices on the path to a list with the `nodes()` function.
3. Unwinds the list into rows.
4. Removes duplicated vertices and returns a set of distinct vertices.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})--() \
        WITH nodes(p) AS n \
        UNWIND n AS n1 \
        RETURN DISTINCT n1;

+-----+
| n1      |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"}) |
| ("player101" :player{age: 36, name: "Tony Parker"}) |
| ("team204" :team{name: "Spurs"}) |
| ("player102" :player{age: 33, name: "LaMarcus Aldridge"}) |
| ("player125" :player{age: 41, name: "Manu Ginobili"}) |
| ("player104" :player{age: 32, name: "Marco Belinelli"}) |
| ("player144" :player{age: 47, name: "Shaquille O'Neal"}) |
| ("player105" :player{age: 31, name: "Danny Green"}) |
| ("player113" :player{age: 29, name: "Dejounte Murray"}) |
| ("player107" :player{age: 32, name: "Aron Baynes"}) |
| ("player109" :player{age: 34, name: "Tiago Splitter"}) |
| ("player108" :player{age: 36, name: "Boris Diaw"}) |
+-----+
```

EXAMPLE 2

The following statement:

1. Matches the vertex with the VID `player100`.
2. Outputs all the tags of the vertex into a list with the `labels()` function.
3. Unwinds the list into rows.
4. Returns the output.

```
nebula> MATCH (v) \
        WHERE id(v)="player100" \
        WITH labels(v) AS tags_unf \
        UNWIND tags_unf AS tags_f \
        RETURN tags_f;

+-----+
| tags_f |
+-----+
| "star" |
| "player" |
| "person" |
+-----+
```

Filter composite queries

`WITH` can work as a filter in the middle of a composite query.

```
nebula> MATCH (v:player)-->(v2:player) \
  WITH DISTINCT v2 AS v2, v2.player.age AS Age \
  ORDER BY Age \
  WHERE Age<25 \
  RETURN v2.player.name AS Name, Age;
+-----+
| Name          | Age |
+-----+
| "Luka Doncic"  | 20  |
| "Ben Simmons"  | 22  |
| "Kristaps Porzingis" | 23  |
+-----+
```

Process the output before using collect()

Use a `WITH` clause to sort and limit the output before using `collect()` to transform the output into a list.

```
nebula> MATCH (v:player) \
  WITH v.player.name AS Name \
  ORDER BY Name DESC \
  LIMIT 3 \
  RETURN collect(Name);
+-----+
| collect(Name) |
+-----+
| ["Yao Ming", "Vince Carter", "Tracy McGrady"] |
+-----+
```

Use with RETURN

Set an alias using a `WITH` clause, and then output the result through a `RETURN` clause.

```
nebula> WITH [1, 2, 3] AS list RETURN 3 IN list AS r;
+-----+
| r      |
+-----+
| true   |
+-----+

nebula> WITH 4 AS one, 3 AS two RETURN one > two AS result;
+-----+
| result |
+-----+
| true   |
+-----+
```

Last update: January 14, 2022

4.7.10 UNWIND

The `UNWIND` statement splits a list into separated rows.

`UNWIND` can function as an individual statement or a clause in a statement.

Syntax

```
UNWIND <list> AS <alias> <RETURN clause>;
```

Split a list

The following example splits the list `[1,2,3]` into three rows.

```
nebula> UNWIND [1,2,3] AS n RETURN n;
+---+
| n |
+---+
| 1 |
| 2 |
| 3 |
+---+
```

Return a list with distinct items

Use `WITH DISTINCT` in the `UNWIND` statement to return a list with distinct items.

EXAMPLE 1

The following statement:

1. Splits the list `[1,1,2,2,3,3]` into rows.
2. Removes duplicated rows.
3. Sorts the rows.
4. Transforms the rows to a list.

```
nebula> WITH [1,1,2,2,3,3] AS n \
        UNWIND n AS r \
        WITH DISTINCT r AS r \
        ORDER BY r \
        RETURN collect(r);
+-----+
| collect(r) |
+-----+
| [1, 2, 3] |
+-----+
```

Example 2

The following statement:

1. Outputs the vertices on the matched path into a list.
2. Splits the list into rows.
3. Removes duplicated rows.
4. Transforms the rows to a list.

```
nebula> MATCH p=(v:player{name:"Tim Duncan"})--(v2) \
        WITH nodes(p) AS n \
        UNWIND n AS r \
        WITH DISTINCT r AS r \
        RETURN collect(r);
+-----+
| collect(r) |
+-----+
| [{"player100" :player{age: 42, name: "Tim Duncan"}}, {"player101" :player{age: 36, name: "Tony Parker"}}, |
| {"team204" :team{name: "Spurs"}}, {"player102" :player{age: 33, name: "LaMarcus Aldridge"}}, |
```

```
|("player125" :player{age: 41, name: "Manu Ginobili"}), ("player104" :player{age: 32, name: "Marco Belinelli"}), |
|("player144" :player{age: 47, name: "Shaquille O'Neal"}), ("player105" :player{age: 31, name: "Danny Green"}), |
|("player113" :player{age: 29, name: "Dejounte Murray"}), ("player107" :player{age: 32, name: "Aron Baynes"}), |
|("player109" :player{age: 34, name: "Tiago Splitter"}), ("player108" :player{age: 36, name: "Boris Diaw"}}] |
+-----+
```

Last update: January 18, 2022

4.8 Space statements

4.8.1 CREATE SPACE

Graph spaces are used to store data in a physically isolated way in Nebula Graph, which is similar to the database concept in MySQL. The `CREATE SPACE` statement can create a new graph space or clone the schema of an existing graph space.

Prerequisites

Only the God role can use the `CREATE SPACE` statement. For more information, see [AUTHENTICATION](#).

Syntax

CREATE GRAPH SPACES

```
CREATE SPACE [IF NOT EXISTS] <graph_space_name> (
  [partition_num = <partition_number>],
  [replica_factor = <replica_number>],
  vid_type = {FIXED_STRING(<N>) | INT[64]}
)
[COMMENT = '<comment>'];
```

Parameter	Description
IF NOT EXISTS	Detects if the related graph space exists. If it does not exist, a new one will be created. The graph space existence detection here only compares the graph space name (excluding properties).
<graph_space_name>	Uniquely identifies a graph space in a Nebula Graph instance. The name of the graph space starts with a letter, supports 1 to 4 bytes UTF-8 encoded characters, such as English letters (case-sensitive), digits, and Chinese characters, but does not support special characters except underscores. To use special characters or reserved keywords as identifiers, quote them with backticks. For more information, see Keywords and reserved words .
partition_num	Specifies the number of partitions in each replica. The suggested number is five times the number of the hard disks in the cluster. For example, if you have 3 hard disks in the cluster, we recommend that you set 15 partitions. The default value is 100.
replica_factor	Specifies the number of replicas in the cluster. The suggested number is 3 in a production environment and 1 in a test environment. The replica number must be an odd number for the need of quorum-based voting. The default value is 1.
vid_type	A required parameter. Specifies the VID type in a graph space. Available values are <code>FIXED_STRING(N)</code> and <code>INT64</code> . <code>INT</code> equals to <code>INT64</code> . <code>FIXED_STRING(<N>)</code> specifies the VID as a string, while <code>INT64</code> specifies it as an integer. <code>N</code> represents the maximum length of the VIDs. If you set a VID that is longer than <code>N</code> characters, Nebula Graph throws an error.
COMMENT	The remarks of the graph space. The maximum length is 256 bytes. By default, there is no comments on a space.

Caution

If the replica number is set to one, you will not be able to load balance or scale out the Nebula Graph Storage Service with the `BALANCE` statement.

Restrictions on VID type change and VID length

The length of the VID should not be longer than `N` characters. If it exceeds `N`, Nebula Graph throws `The VID must be a 64-bit integer or a string fitting space vertex id length limit.`

Note

`graph_space_name`, `partition_num`, `replica_factor`, `vid_type`, and `comment` cannot be modified once set. To modify them, drop the current working graph space with `DROP SPACE` and create a new one with `CREATE SPACE`.

CLONE GRAPH SPACES

```
CREATE SPACE <new_graph_space_name> AS <old_graph_space_name>;
```

Parameter	Description
<code><new_graph_space_name></code>	The name of the graph space that is newly created. The name of the graph space starts with a letter, supports 1 to 4 bytes UTF-8 encoded characters, such as English letters (case-sensitive), digits, and Chinese characters, but does not support special characters except underscores. For more information, see Keywords and reserved words . When a new graph space is created, the schema of the old graph space <code><old_graph_space_name></code> will be cloned, including its parameters (the number of partitions and replicas, etc.), Tag, Edge type and native indexes.
<code><old_graph_space_name></code>	The name of the graph space that already exists.

Examples

```
# The following example creates a graph space with a specified VID type and the maximum length. Other fields still use the default values.
nebula> CREATE SPACE IF NOT EXISTS my_space_1 (vid_type=FIXED_STRING(30));

# The following example creates a graph space with a specified partition number, replica number, and VID type.
nebula> CREATE SPACE IF NOT EXISTS my_space_2 (partition_num=15, replica_factor=1, vid_type=FIXED_STRING(30));

# The following example creates a graph space with a specified partition number, replica number, and VID type, and adds a comment on it.
nebula> CREATE SPACE IF NOT EXISTS my_space_3 (partition_num=15, replica_factor=1, vid_type=FIXED_STRING(30)) comment="Test the graph space";

# Clone a graph space.
nebula> CREATE SPACE IF NOT EXISTS my_space_4 as my_space_3;
nebula> SHOW CREATE SPACE my_space_4;
+-----+
+-----+-----+
+ | Space      | Create                                     |
+ | Space      |                                     |
+ |-----+-----+
+ | "my_space_4" | "CREATE SPACE `my_space_4` (partition_num = 15, replica_factor = 1, charset = utf8, collate = utf8_bin, vid_type = FIXED_STRING(30)) ON default comment = 'Test the graph space'" |
+ |-----+-----+
+ |
```

Implementation of the operation

Caution

Trying to use a newly created graph space may fail because the creation is implemented asynchronously. To make sure the follow-up operations work as expected, Wait for two heartbeat cycles, i.e., 20 seconds. To change the heartbeat interval, modify the `heartbeat_interval_secs` parameter in the [configuration files](#) for all services. If the heartbeat interval is too short (i.e., less than 5 seconds), disconnection between peers may happen because of the misjudgment of machines in the distributed system.

Check partition distribution

On some large clusters, the partition distribution is possibly unbalanced because of the different startup times. You can run the following command to do a check of the machine distribution.

```
nebula> SHOW HOSTS;
+-----+-----+-----+-----+-----+-----+-----+
+ | Host      | Port | Status | Leader count | Leader distribution | Partition distribution | Version |
+ |-----+-----+-----+-----+-----+-----+-----+
+ | "storaged0" | 9779 | "ONLINE" | 8 | "basketballplayer:3, test:5" | "basketballplayer:10, test:10" | "3.0.0" |
+ | "storaged1" | 9779 | "ONLINE" | 9 | "basketballplayer:4, test:5" | "basketballplayer:10, test:10" | "3.0.0" |
+ | "storaged2" | 9779 | "ONLINE" | 3 | "basketballplayer:3" | "basketballplayer:10, test:10" | "3.0.0" |
+ |-----+-----+-----+-----+-----+-----+-----+
+ |
```

To balance the request loads, use the following command.

```
nebula> BALANCE LEADER;
nebula> SHOW HOSTS;
```

Host	Port	Status	Leader count	Leader distribution	Partition distribution	Version
"storaged0"	9779	"ONLINE"	7	"basketballplayer:3, test:4"	"basketballplayer:10, test:10"	"3.0.0"
"storaged1"	9779	"ONLINE"	7	"basketballplayer:4, test:3"	"basketballplayer:10, test:10"	"3.0.0"
"storaged2"	9779	"ONLINE"	6	"basketballplayer:3, test:3"	"basketballplayer:10, test:10"	"3.0.0"

Last update: February 8, 2022

4.8.2 USE

`USE` specifies a graph space as the current working graph space for subsequent queries.

Prerequisites

Running the `USE` statement requires some **privileges** for the graph space. Otherwise, Nebula Graph throws an error.

Syntax

```
USE <graph_space_name>;
```

Examples

```
# The following example creates two sample spaces.
nebula> CREATE SPACE IF NOT EXISTS space1 (vid_type=FIXED_STRING(30));
nebula> CREATE SPACE IF NOT EXISTS space2 (vid_type=FIXED_STRING(30));

# The following example specifies space1 as the current working graph space.
nebula> USE space1;

# The following example specifies space2 as the current working graph space. Hereafter, you cannot read any data from space1, because these vertices and edges being
traversed have no relevance with space1.
nebula> USE space2;
```

Caution

You cannot use two graph spaces in one statement.

Different from Fabric Cypher, graph spaces in Nebula Graph are fully isolated from each other. Making a graph space as the working graph space prevents you from accessing other spaces. The only way to traverse in a new graph space is to switch by the `USE` statement. In Fabric Cypher, you can use two graph spaces in one statement (using the `USE + CALL` syntax). But in Nebula Graph, you can only use one graph space in one statement.

Last update: January 14, 2022

4.8.3 SHOW SPACES

`SHOW SPACES` lists all the graph spaces in the Nebula Graph examples.

Syntax

```
SHOW SPACES;
```

Example

```
nebula> SHOW SPACES;
+-----+
| Name          |
+-----+
| "cba"         |
| "basketballplayer" |
+-----+
```

To create graph spaces, see [CREATE SPACE](#).

Last update: January 14, 2022

4.8.4 DESCRIBE SPACE

`DESCRIBE SPACE` returns the information about the specified graph space.

Syntax

You can use `DESC` instead of `DESCRIBE` for short.

```
DESC[RIBE] SPACE <graph_space_name>;
```

The `DESCRIBE SPACE` statement is different from the `SHOW SPACES` statement. For details about `SHOW SPACES`, see [SHOW SPACES](#).

Example

```
nebula> DESCRIBE SPACE basketballplayer;
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| ID | Name           | Partition Number | Replica Factor | Charset | Collate   | Vid Type       | Atomic Edge | Zones                               | Comment |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
| 1  | "basketballplayer" | 10                | 1              | "utf8"  | "utf8_bin" | "FIXED_STRING(32)" | false      | "default_zone_127.0.0.1_9779"      |         |
+-----+-----+-----+-----+-----+-----+-----+-----+-----+
```

Last update: February 14, 2022

4.8.5 DROP SPACE

`DROP SPACE` deletes everything in the specified graph space.

Prerequisites

Only the God role can use the `DROP SPACE` statement. For more information, see [AUTHENTICATION](#).

Syntax

```
DROP SPACE [IF EXISTS] <graph_space_name>;
```

You can use the `IF EXISTS` keywords when dropping spaces. These keywords automatically detect if the related graph space exists. If it exists, it will be deleted. Otherwise, no graph space will be deleted.

The `DROP SPACE` statement does not remove all the files and directories from the disk. To remove all the files and directories, add `auto_remove_invalid_space=true` to the Storage Service configuration file. For the file path, see [Storage Service configurations](#).

Caution

BE CAUTIOUS about running the `DROP SPACE` statement.

Last update: January 14, 2022

4.9 Tag statements

4.9.1 CREATE TAG

`CREATE TAG` creates a tag with the given name in a graph space.

OpenCypher compatibility

Tags in nGQL are similar to labels in openCypher. But they are also quite different. For example, the ways to create them are different.

- In openCypher, labels are created together with vertices in `CREATE` statements.
- In nGQL, tags are created separately using `CREATE TAG` statements. Tags in nGQL are more like tables in MySQL.

Prerequisites

Running the `CREATE TAG` statement requires some **privileges** for the graph space. Otherwise, Nebula Graph throws an error.

Syntax

To create a tag in a specific graph space, you must specify the current working space with the `USE` statement.

```
CREATE TAG [IF NOT EXISTS] <tag_name>
(
  <prop_name> <data_type> [NULL | NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']
  [{, <prop_name> <data_type> [NULL | NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']} ...]
)
[TTL_DURATION = <ttd_duration>]
```

```
[TTL_COL = <prop_name>]
[COMMENT = '<comment>'];
```

Parameter	Description
IF NOT EXISTS	Detects if the tag that you want to create exists. If it does not exist, a new one will be created. The tag existence detection here only compares the tag names (excluding properties).
<tag_name>	The tag name must be unique in a graph space. Once the tag name is set, it can not be altered. The name of the tag starts with a letter, supports 1 to 4 bytes UTF-8 encoded characters, such as English letters (case-sensitive), digits, and Chinese characters, but does not support special characters except underscores. To use special characters or reserved keywords as identifiers, quote them with backticks. For more information, see Keywords and reserved words .
<prop_name>	The name of the property. It must be unique for each tag. The rules for permitted property names are the same as those for tag names.
<data_type>	Shows the data type of each property. For a full description of the property data types, see Data types and Boolean .
NULL NOT NULL	Specifies if the property supports NULL NOT NULL. The default value is NULL.
DEFAULT	Specifies a default value for a property. The default value can be a literal value or an expression supported by Nebula Graph. If no value is specified, the default value is used when inserting a new vertex.
COMMENT	The remarks of a certain property or the tag itself. The maximum length is 256 bytes. By default, there will be no comments on a tag.
TTL_DURATION	Specifies the life cycle for the property. The property that exceeds the specified TTL expires. The expiration threshold is the TTL_COL value plus the TTL_DURATION. The default value of TTL_DURATION is 0. It means the data never expires.
TTL_COL	Specifies the property to set a timeout on. The data type of the property must be int or timestamp. A tag can only specify one field as TTL_COL. For more information on TTL, see TTL options .

EXAMPLES

```
nebula> CREATE TAG IF NOT EXISTS player(name string, age int);

# The following example creates a tag with no properties.
nebula> CREATE TAG IF NOT EXISTS no_property();

# The following example creates a tag with a default value.
nebula> CREATE TAG IF NOT EXISTS player_with_default(name string, age int DEFAULT 20);

# In the following example, the TTL of the create_time field is set to be 100 seconds.
nebula> CREATE TAG IF NOT EXISTS woman(name string, age int, \
    married bool, salary double, create_time timestamp) \
    TTL_DURATION = 100, TTL_COL = "create_time";
```

Implementation of the operation

Trying to use a newly created tag may fail because the creation of the tag is implemented asynchronously. To make sure the follow-up operations work as expected, Wait for two heartbeat cycles, i.e., 20 seconds.

To change the heartbeat interval, modify the `heartbeat_interval_secs` parameter in the [configuration files](#) for all services.

Last update: January 21, 2022

4.9.2 DROP TAG

`DROP TAG` drops a tag with the given name in the current working graph space.

A vertex can have one or more tags.

- If a vertex has only one tag, the vertex **CANNOT** be accessed after you drop it. But its edges are available. The vertex will be dropped in the next compaction.
- If a vertex has multiple tags, the vertex is still accessible after you drop one of them. But all the properties defined by this dropped tag **CANNOT** be accessed.

This operation only deletes the Schema data. All the files or directories in the disk will not be deleted directly until the next compaction.

Prerequisites

- Running the `DROP TAG` statement requires some [privileges](#) for the graph space. Otherwise, Nebula Graph throws an error.
- Before you drop a tag, make sure that the tag does not have any indexes. Otherwise, the conflict error (`[ERROR (-8)]: Conflict!`) will be returned when you run the `DROP TAG` statement. To drop an index, see [DROP INDEX](#).

Syntax

```
DROP TAG [IF EXISTS] <tag_name>;
```

- `IF NOT EXISTS` : Detects if the tag that you want to drop exists. Only when it exists will it be dropped.
- `tag_name` : Specifies the tag name that you want to drop. You can drop only one tag in one statement.

Example

```
nebula> CREATE TAG IF NOT EXISTS test(p1 string, p2 int);
nebula> DROP TAG test;
```

Note

In nGQL, there is no such statement to drop a certain tag of a vertex with the given name.

- In openCypher, you can use the statement `REMOVE v:LABEL` to drop the tag `TABLE` of the vertex `v`.
- In nGQL, after `CREATE TAG` and `INSERT VERTEX`, you can add a `TAG` on the vertex. But there is no way to drop the `TAG` afterward.

We recommend you to add a field to identify the logical deletion in the schema. For example, add `removed` to the schema of each tag.

Last update: January 14, 2022

4.9.3 ALTER TAG

`ALTER TAG` alters the structure of a tag with the given name in a graph space. You can add or drop properties, and change the data type of an existing property. You can also set a **TTL** (Time-To-Live) on a property, or change its TTL duration.

Prerequisites

- Running the `ALTER TAG` statement requires some **privileges** for the graph space. Otherwise, Nebula Graph throws an error.
- Before you alter properties for a tag, make sure that the properties are not indexed. If the properties contain any indexes, the conflict error `[ERROR (-8)]: Conflict!` will occur when you `ALTER TAG`. For more information on dropping an index, see **DROP INDEX**.

Syntax

```
ALTER TAG <tag_name>
  <alter_definition> [[, alter_definition] ...]
  [ttl_definition [, ttl_definition] ... ]
  [COMMENT = '<comment>'];

alter_definition:
| ADD    (prop_name data_type)
| DROP   (prop_name)
| CHANGE (prop_name data_type)

ttl_definition:
  TTL_DURATION = ttl_duration, TTL_COL = prop_name
```

- `tag_name`: Specifies the tag name that you want to alter. You can alter only one tag in one statement. Before you alter a tag, make sure that the tag exists in the current working graph space. If the tag does not exist, an error will occur when you alter it.
- Multiple `ADD`, `DROP`, and `CHANGE` clauses are permitted in a single `ALTER TAG` statement, separated by commas.

Examples

```
nebula> CREATE TAG IF NOT EXISTS t1 (p1 string, p2 int);
nebula> ALTER TAG t1 ADD (p3 int, p4 string);
nebula> ALTER TAG t1 TTL_DURATION = 2, TTL_COL = "p2";
nebula> ALTER TAG t1 COMMENT = 'test1';
```

Implementation of the operation

Trying to use a newly altered tag may fail because the alteration of the tag is implemented asynchronously. To make sure the follow-up operations work as expected, Wait for two heartbeat cycles, i.e., 20 seconds.

To change the heartbeat interval, modify the `heartbeat_interval_secs` parameter in the **configuration files** for all services.

Last update: January 14, 2022

4.9.4 SHOW TAGS

The `SHOW TAGS` statement shows the name of all tags in the current graph space.

You do not need any privileges for the graph space to run the `SHOW TAGS` statement. But the returned results are different based on [role privileges](#).

Syntax

```
SHOW TAGS;
```

Examples

```
nebula> SHOW TAGS;
+-----+
| Name   |
+-----+
| "player" |
| "team"  |
+-----+
```

Last update: January 14, 2022

4.9.5 DESCRIBE TAG

`DESCRIBE TAG` returns the information about a tag with the given name in a graph space, such as field names, data type, and so on.

Prerequisite

Running the `DESCRIBE TAG` statement requires some **privileges** for the graph space. Otherwise, Nebula Graph throws an error.

Syntax

```
DESC[RIBE] TAG <tag_name>;
```

You can use `DESC` instead of `DESCRIBE` for short.

Example

```
nebula> DESCRIBE TAG player;
+-----+-----+-----+-----+
| Field | Type   | Null  | Default | Comment |
+-----+-----+-----+-----+
| "name" | "string" | "YES" |         |         |
| "age"  | "int64"  | "YES" |         |         |
+-----+-----+-----+-----+
```

Last update: January 14, 2022

4.9.6 DELETE TAG

`DELETE TAG` deletes a tag with the given name on a specified vertex.

Prerequisites

Running the `DELETE TAG` statement requires some **privileges** for the graph space. Otherwise, Nebula Graph throws an error.

Syntax

```
DELETE TAG <tag_name_list> FROM <VID>;
```

- `tag_name_list` : Specifies the name of the tag. Multiple tags are separated with commas (.). `*` means all tags.
- `VID` : Specifies the VID of the tag to delete.

Example

```
nebula> CREATE TAG IF NOT EXISTS test1(p1 string, p2 int);
nebula> CREATE TAG IF NOT EXISTS test2(p3 string, p4 int);
nebula> INSERT VERTEX test1(p1, p2),test2(p3, p4) VALUES "test":("123", 1, "456", 2);
nebula> FETCH PROP ON * "test" YIELD vertex AS v;
+-----+
| v |
+-----+
| ("test" :test1{p1: "123", p2: 1} :test2{p3: "456", p4: 2}) |
+-----+
nebula> DELETE TAG test1 FROM "test";
nebula> FETCH PROP ON * "test" YIELD vertex AS v;
+-----+
| v |
+-----+
| ("test" :test2{p3: "456", p4: 2}) |
+-----+
nebula> DELETE TAG * FROM "test";
nebula> FETCH PROP ON * "test" YIELD vertex AS v;
+---+
| v |
+---+
+---+
```

Compatibility

- In openCypher, you can use the statement `REMOVE v:LABEL` to delete the tag `LABEL` of the vertex `v`.
- `DELETE TAG` and `DROP TAG` have the same semantics but different syntax. In nGQL, use `DELETE TAG`.

Last update: January 14, 2022

4.9.7 Add and delete tags

OpenCypher has the features of `SET label` and `REMOVE label` to speed up the process of querying or labeling.

Nebula Graph achieves the same operations by creating and inserting tags to an existing vertex, which can quickly query vertices based on the tag name. Users can also run `DELETE TAG` to delete some vertices that are no longer needed.

Examples

For example, in the `basketballplayer` data set, some basketball players are also team shareholders. Users can create an index for the shareholder tag `shareholder` for quick search. If the player is no longer a shareholder, users can delete the shareholder tag of the corresponding player by `DELETE TAG`.

```
//This example creates the shareholder tag and index.
nebula> CREATE TAG IF NOT EXISTS shareholder();
nebula> CREATE TAG INDEX IF NOT EXISTS shareholder_tag on shareholder();

//This example adds a tag on the vertex.
nebula> INSERT VERTEX shareholder() VALUES "player100":();
nebula> INSERT VERTEX shareholder() VALUES "player101":();

//This example queries all the shareholders.
nebula> MATCH (v:shareholder) RETURN v;
+-----+
| v |
+-----+
| ("player100" :player{age: 42, name: "Tim Duncan"} :shareholder{}) |
| ("player101" :player{age: 36, name: "Tony Parker"} :shareholder{}) |
+-----+

nebula> LOOKUP ON shareholder YIELD id(vertex);
+-----+
| id(VERTEX) |
+-----+
| "player100" |
| "player101" |
+-----+

//In this example, the "player100" is no longer a shareholder.
nebula> DELETE TAG shareholder FROM "player100";
nebula> LOOKUP ON shareholder YIELD id(vertex);
+-----+
| id(VERTEX) |
+-----+
| "player101" |
+-----+
```

Note

If the index is created after inserting the test data, use the `REBUILD TAG INDEX <index_name_list>;` statement to rebuild the index.

Last update: January 14, 2022

4.10 Edge type statements

4.10.1 CREATE EDGE

`CREATE EDGE` creates an edge type with the given name in a graph space.

OpenCypher compatibility

Edge types in nGQL are similar to relationship types in openCypher. But they are also quite different. For example, the ways to create them are different.

- In openCypher, relationship types are created together with vertices in `CREATE` statements.
- In nGQL, edge types are created separately using `CREATE EDGE` statements. Edge types in nGQL are more like tables in MySQL.

Prerequisites

Running the `CREATE EDGE` statement requires some [privileges](#) for the graph space. Otherwise, Nebula Graph throws an error.

Syntax

To create an edge type in a specific graph space, you must specify the current working space with the `USE` statement.

```
CREATE EDGE [IF NOT EXISTS] <edge_type_name>
(
  <prop_name> <data_type> [NULL | NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']
  [{, <prop_name> <data_type> [NULL | NOT NULL] [DEFAULT <default_value>] [COMMENT '<comment>']} ...]
)
[TTL_DURATION = <ttl_duration>]
[TTL_COL = <prop_name>]
[COMMENT = '<comment>'];
```

Parameter	Description
<code>IF NOT EXISTS</code>	Detects if the edge type that you want to create exists. If it does not exist, a new one will be created. The edge type existence detection here only compares the edge type names (excluding properties).
<code><edge_type_name></code>	The edge type name must be unique in a graph space. Once the edge type name is set, it can not be altered. The name of the edge type starts with a letter, supports 1 to 4 bytes UTF-8 encoded characters, such as English letters (case-sensitive), digits, and Chinese characters, but does not support special characters except underscores. To use special characters or reserved keywords as identifiers, quote them with backticks. For more information, see Keywords and reserved words .
<code><prop_name></code>	The name of the property. It must be unique for each edge type. The rules for permitted property names are the same as those for edge type names.
<code><data_type></code>	Shows the data type of each property. For a full description of the property data types, see Data types and Boolean .
<code>NULL \ NOT NULL</code>	Specifies if the property supports <code>NULL \ NOT NULL</code> . The default value is <code>NULL</code> .
<code>DEFAULT</code>	Specifies a default value for a property. The default value can be a literal value or an expression supported by Nebula Graph. If no value is specified, the default value is used when inserting a new edge.
<code>COMMENT</code>	The remarks of a certain property or the edge type itself. The maximum length is 256 bytes. By default, there will be no comments on an edge type.
<code>TTL_DURATION</code>	Specifies the life cycle for the property. The property that exceeds the specified TTL expires. The expiration threshold is the <code>TTL_COL</code> value plus the <code>TTL_DURATION</code> . The default value of <code>TTL_DURATION</code> is <code>0</code> . It means the data never expires.
<code>TTL_COL</code>	Specifies the property to set a timeout on. The data type of the property must be <code>int</code> or <code>timestamp</code> . An edge type can only specify one field as <code>TTL_COL</code> . For more information on TTL, see TTL options .

EXAMPLES

```
nebula> CREATE EDGE IF NOT EXISTS follow(degree int);

# The following example creates an edge type with no properties.
nebula> CREATE EDGE IF NOT EXISTS no_property();

# The following example creates an edge type with a default value.
nebula> CREATE EDGE IF NOT EXISTS follow_with_default(degree int DEFAULT 20);

# In the following example, the TTL of the p2 field is set to be 100 seconds.
nebula> CREATE EDGE IF NOT EXISTS e1(p1 string, p2 int, p3 timestamp) \
    TTL_DURATION = 100, TTL_COL = "p2";
```

Implementation of the operation

Trying to use a newly created edge type may fail because the creation of the edge type is implemented asynchronously. To make sure the follow-up operations work as expected, Wait for two heartbeat cycles, i.e., 20 seconds.

To change the heartbeat interval, modify the `heartbeat_interval_secs` parameter in the [configuration files](#) for all services.

Last update: January 21, 2022

4.10.2 DROP EDGE

`DROP EDGE` drops an edge type with the given name in a graph space.

An edge can have only one edge type. After you drop it, the edge **CANNOT** be accessed. The edge will be deleted in the next compaction.

This operation only deletes the Schema data. All the files or directories in the disk will not be deleted directly until the next compaction.

Prerequisites

- Running the `DROP EDGE` statement requires some **privileges** for the graph space. Otherwise, Nebula Graph throws an error.
- Before you drop an edge type, make sure that the edge type does not have any indexes. Otherwise, the conflict error (`[ERROR (-8)]: Conflict!`) will be returned. To drop an index, see [DROP INDEX](#).

Syntax

```
DROP EDGE [IF EXISTS] <edge_type_name>
```

Edge type name

- `IF NOT EXISTS` : Detects if the edge type that you want to drop exists. Only when it exists will it be dropped.
- `edge_type_name` : Specifies the edge type name that you want to drop. You can drop only one edge type in one statement.

Example

```
nebula> CREATE EDGE IF NOT EXISTS e1(p1 string, p2 int);
nebula> DROP EDGE e1;
```

Last update: January 14, 2022

4.10.3 ALTER EDGE

`ALTER EDGE` alters the structure of an edge type with the given name in a graph space. You can add or drop properties, and change the data type of an existing property. You can also set a `TTL` (Time-To-Live) on a property, or change its TTL duration.

Prerequisites

- Running the `ALTER EDGE` statement requires some `privileges` for the graph space. Otherwise, Nebula Graph throws an error.
- Before you alter properties for an edge type, make sure that the properties are not indexed. If the properties contain any indexes, the conflict error `[ERROR (-8)]: Conflict!` will occur when you `ALTER EDGE`. For more information on dropping an index, see [DROP INDEX](#).

Syntax

```
ALTER EDGE <edge_type_name>
  <alter_definition> [, alter_definition] ...]
  [ttl_definition [, ttl_definition] ... ]
  [COMMENT = '<comment>'];

alter_definition:
| ADD    (prop_name data_type)
| DROP   (prop_name)
| CHANGE (prop_name data_type)

ttl_definition:
  TTL_DURATION = ttl_duration, TTL_COL = prop_name
```

- `edge_type_name`: Specifies the edge type name that you want to alter. You can alter only one edge type in one statement. Before you alter an edge type, make sure that the edge type exists in the graph space. If the edge type does not exist, an error occurs when you alter it.
- Multiple `ADD`, `DROP`, and `CHANGE` clauses are permitted in a single `ALTER EDGE` statement, separated by commas.

Example

```
nebula> CREATE EDGE IF NOT EXISTS e1(p1 string, p2 int);
nebula> ALTER EDGE e1 ADD (p3 int, p4 string);
nebula> ALTER EDGE e1 TTL_DURATION = 2, TTL_COL = "p2";
nebula> ALTER EDGE e1 COMMENT = 'edge1';
```

Implementation of the operation

Trying to use a newly altered edge type may fail because the alteration of the edge type is implemented asynchronously. To make sure the follow-up operations work as expected, Wait for two heartbeat cycles, i.e., 20 seconds.

To change the heartbeat interval, modify the `heartbeat_interval_secs` parameter in the [configuration files](#) for all services.

Last update: January 14, 2022

4.10.4 SHOW EDGES

`SHOW EDGES` shows all edge types in the current graph space.

You do not need any privileges for the graph space to run the `SHOW EDGES` statement. But the returned results are different based on [role privileges](#).

Syntax

```
SHOW EDGES;
```

Example

```
nebula> SHOW EDGES;
+-----+
| Name  |
+-----+
| "follow" |
| "serve" |
+-----+
```

Last update: January 14, 2022

4.10.5 DESCRIBE EDGE

`DESCRIBE EDGE` returns the information about an edge type with the given name in a graph space, such as field names, data type, and so on.

Prerequisites

Running the `DESCRIBE EDGE` statement requires some **privileges** for the graph space. Otherwise, Nebula Graph throws an error.

Syntax

```
DESC[RIBE] EDGE <edge_type_name>
```

You can use `DESC` instead of `DESCRIBE` for short.

Example

```
nebula> DESCRIBE EDGE follow;
+-----+-----+-----+-----+-----+
| Field | Type  | Null  | Default | Comment |
+-----+-----+-----+-----+-----+
| "degree" | "int64" | "YES" |         |         |
+-----+-----+-----+-----+-----+
```

Last update: January 14, 2022

4.11 Vertex statements

4.11.1 INSERT VERTEX

The `INSERT VERTEX` statement inserts one or more vertices into a graph space in Nebula Graph.

Prerequisites

Running the `INSERT VERTEX` statement requires some [privileges](#) for the graph space. Otherwise, Nebula Graph throws an error.

Syntax

```
INSERT VERTEX [IF NOT EXISTS] [tag_props, [tag_props] ...]
VALUES VID: ([prop_value_list])

tag_props:
  tag_name ([prop_name_list])

prop_name_list:
  [prop_name [, prop_name] ...]

prop_value_list:
  [prop_value [, prop_value] ...]
```

- `IF NOT EXISTS` detects if the VID that you want to insert exists. If it does not exist, a new one will be inserted.

Note

- `IF NOT EXISTS` only compares the names of the VID and the tag (excluding properties).
- `IF NOT EXISTS` will read to check whether the data exists, which will have a significant impact on performance.
- `tag_name` denotes the tag (vertex type), which must be created before `INSERT VERTEX`. For more information, see [CREATE TAG](#).

Caution

Nebula Graph 3.0.0 supports inserting vertices without tags.

- `prop_name_list` contains the names of the properties on the tag.
- `VID` is the vertex ID. In Nebula Graph 2.0, string and integer VID types are supported. The VID type is set when a graph space is created. For more information, see [CREATE SPACE](#).
- `prop_value_list` must provide the property values according to the `prop_name_list`. When the `NOT NULL` constraint is set for a given property, an error is returned if no property is given. When the default value for a property is `NULL`, you can omit to specify the property value. For details, see [CREATE TAG](#).

Caution

`INSERT VERTEX` and `CREATE` have different semantics.

- The semantics of `INSERT VERTEX` is closer to that of `INSERT` in NoSQL (key-value), or `UPSERT` (`UPDATE` or `INSERT`) in SQL.
- When two `INSERT` statements (neither uses `IF NOT EXISTS`) with the same `VID` and `TAG` are operated at the same time, the latter `INSERT` will overwrite the former.
- When two `INSERT` statements with the same `VID` but different `TAGS` are operated at the same time, the operation of different tags will not overwrite each other.

Examples are as follows.

Examples

```
# Insert a vertex without tag.
nebula> INSERT VERTEX VALUES "1":();

# The following examples create tag t1 with no property and inserts vertex "10" with no property.
nebula> CREATE TAG IF NOT EXISTS t1();
nebula> INSERT VERTEX t1() VALUES "10":();
```

```
nebula> CREATE TAG IF NOT EXISTS t2 (name string, age int);
nebula> INSERT VERTEX t2 (name, age) VALUES "11":("n1", 12);

# In the following example, the insertion fails because "a13" is not int.
nebula> INSERT VERTEX t2 (name, age) VALUES "12":("n1", "a13");

# The following example inserts two vertices at one time.
nebula> INSERT VERTEX t2 (name, age) VALUES "13":("n3", 12), "14":("n4", 8);
```

```
nebula> CREATE TAG IF NOT EXISTS t3(p1 int);
nebula> CREATE TAG IF NOT EXISTS t4(p2 string);

# The following example inserts vertex "21" with two tags.
nebula> INSERT VERTEX t3 (p1), t4(p2) VALUES "21": (321, "hello");
```

A vertex can be inserted/written with new values multiple times. Only the last written values can be read.

```
# The following examples insert vertex "11" with new values for multiple times.
nebula> INSERT VERTEX t2 (name, age) VALUES "11":("n2", 13);
nebula> INSERT VERTEX t2 (name, age) VALUES "11":("n3", 14);
nebula> INSERT VERTEX t2 (name, age) VALUES "11":("n4", 15);
nebula> FETCH PROP ON t2 "11" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 15, name: "n4"} |
+-----+

nebula> CREATE TAG IF NOT EXISTS t5(p1 fixed_string(5) NOT NULL, p2 int, p3 int DEFAULT NULL);
nebula> INSERT VERTEX t5(p1, p2, p3) VALUES "001":("Abe", 2, 3);

# In the following example, the insertion fails because the value of p1 cannot be NULL.
nebula> INSERT VERTEX t5(p1, p2, p3) VALUES "002":(NULL, 4, 5);
[ERROR (-1005)]: Storage Error: The not null field cannot be null.

# In the following example, the value of p3 is the default NULL.
nebula> INSERT VERTEX t5(p1, p2) VALUES "003":("cd", 5);
nebula> FETCH PROP ON t5 "003" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {p1: "cd", p2: 5, p3: __NULL__} |
+-----+

# In the following example, the allowed maximum length of p1 is 5.
nebula> INSERT VERTEX t5(p1, p2) VALUES "004":("shalalalala", 4);
nebula> FETCH PROP ON t5 "004" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {p1: "shala", p2: 4, p3: __NULL__} |
+-----+
```

If you insert a vertex that already exists with `IF NOT EXISTS`, there will be no modification.

```
# The following example inserts vertex "1".
nebula> INSERT VERTEX t2 (name, age) VALUES "1":("n2", 13);
# Modify vertex "1" with IF NOT EXISTS. But there will be no modification as vertex "1" already exists.
nebula> INSERT VERTEX IF NOT EXISTS t2 (name, age) VALUES "1":("n3", 14);
nebula> FETCH PROP ON t2 "1" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 13, name: "n2"} |
+-----+
```

Last update: January 17, 2022

4.11.2 DELETE VERTEX

By default, the `DELETE VERTEX` statement deletes vertices but the incoming and outgoing edges of the vertices.

Compatibility

- Nebula Graph 2.x deletes vertices and their incoming and outgoing edges.
- Nebula Graph 3.0.0 only deletes the vertices, and does not delete the related outgoing and incoming edges of the vertices. At this time, there will be dangling edges by default.

The `DELETE VERTEX` statement deletes one vertex or multiple vertices at a time. You can use `DELETE VERTEX` together with pipes. For more information about pipe, see [Pipe operator](#).

Note

- `DELETE VERTEX` deletes vertices directly.
- `DELETE TAG` deletes a tag with the given name on a specified vertex.

Syntax

```
DELETE VERTEX <vid> [, <vid> ...] [WITH EDGE];
```

- `WITH EDGE`: deletes vertices and the related incoming and outgoing edges of the vertices.

Examples

This query deletes the vertex whose ID is "team1".

```
# Delete the vertex whose VID is `team1` but the related incoming and outgoing edges are not deleted.
nebula> DELETE VERTEX "team1";

# Delete the vertex whose VID is `team1` and the related incoming and outgoing edges.
nebula> DELETE VERTEX "team1" WITH EDGE;
```

This query shows that you can use `DELETE VERTEX` together with pipe to delete vertices.

```
nebula> GO FROM "player100" OVER serve WHERE properties(edge).start_year == "2021" YIELD dst(edge) AS id | DELETE VERTEX $-.id;
```

Process of deleting vertices

Once Nebula Graph deletes the vertices, all edges (incoming and outgoing edges) of the target vertex will become dangling edges. When Nebula Graph deletes the vertices `WITH EDGE`, Nebula Graph traverses the incoming and outgoing edges related to the vertices and deletes them all. Then Nebula Graph deletes the vertices.

Caution

- Atomic deletion is not supported during the entire process for now. Please retry when a failure occurs to avoid partial deletion, which will cause pendent edges.
- Deleting a supernode takes a lot of time. To avoid connection timeout before the deletion is complete, you can modify the parameter `--storage_client_timeout_ms` in `nebula-graphd.conf` to extend the timeout period.

Last update: January 14, 2022

4.11.3 UPDATE VERTEX

The `UPDATE VERTEX` statement updates properties on tags of a vertex.

In Nebula Graph, `UPDATE VERTEX` supports compare-and-set (CAS).

Note

An `UPDATE VERTEX` statement can only update properties on **ONE TAG** of a vertex.

Syntax

```
UPDATE VERTEX ON <tag_name> <vid>
SET <update_prop>
[WHEN <condition>]
[YIELD <output>]
```

Parameter	Required	Description	Example
ON <tag_name>	Yes	Specifies the tag of the vertex. The properties to be updated must be on this tag.	ON player
<vid>	Yes	Specifies the ID of the vertex to be updated.	"player100"
SET <update_prop>	Yes	Specifies the properties to be updated and how they will be updated.	SET age = age +1
WHEN <condition>	No	Specifies the filter conditions. If <condition> evaluates to <code>false</code> , the <code>SET</code> clause will not take effect.	WHEN name == "Tim"
YIELD <output>	No	Specifies the output format of the statement.	YIELD name AS Name

Example

```
// This query checks the properties of vertex "player101".
nebula> FETCH PROP ON player "player101" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 36, name: "Tony Parker"} |
+-----+

// This query updates the age property and returns name and the new age.
nebula> UPDATE VERTEX ON player "player101" \
    SET age = age + 2 \
    WHEN name == "Tony Parker" \
    YIELD name AS Name, age AS Age;
+-----+-----+
| Name | Age |
+-----+-----+
| "Tony Parker" | 38 |
+-----+-----+
```

Last update: January 14, 2022

4.11.4 UPSERT VERTEX

The `UPSERT` statement is a combination of `UPDATE` and `INSERT`. You can use `UPSERT VERTEX` to update the properties of a vertex if it exists or insert a new vertex if it does not exist.

Note

An `UPSERT VERTEX` statement can only update the properties on **ONE TAG** of a vertex.

The performance of `UPSERT` is much lower than that of `INSERT` because `UPSERT` is a read-modify-write serialization operation at the partition level.

Danger

Don't use `UPSERT` for scenarios with highly concurrent writes. You can use `UPDATE` or `INSERT` instead.

Syntax

```
UPSERT VERTEX ON <tag> <vid>
SET <update_prop>
[WHEN <condition>]
[YIELD <output>]
```

Parameter	Required	Description	Example
ON <tag>	Yes	Specifies the tag of the vertex. The properties to be updated must be on this tag.	ON player
<vid>	Yes	Specifies the ID of the vertex to be updated or inserted.	"player100"
SET <update_prop>	Yes	Specifies the properties to be updated and how they will be updated.	SET age = age +1
WHEN <condition>	No	Specifies the filter conditions.	WHEN name == "Tim"
YIELD <output>	No	Specifies the output format of the statement.	YIELD name AS Name

Insert a vertex if it does not exist

If a vertex does not exist, it is created no matter the conditions in the `WHEN` clause are met or not, and the `SET` clause always takes effect. The property values of the new vertex depend on:

- How the `SET` clause is defined.
- Whether the property has a default value.

For example, if:

- The vertex to be inserted will have properties `name` and `age` based on the tag `player`.
- The `SET` clause specifies that `age = 30`.

Then the property values in different cases are listed as follows:

Are <code>WHEN</code> conditions met	If properties have default values	Value of <code>name</code>	Value of <code>age</code>
Yes	Yes	The default value	30
Yes	No	<code>NULL</code>	30
No	Yes	The default value	30
No	No	<code>NULL</code>	30

Here are some examples:

```
// This query checks if the following three vertices exist. The result "Empty set" indicates that the vertices do not exist.
nebula> FETCH PROP ON * "player666", "player667", "player668" YIELD properties(vertex);
+-----+
| properties(vertex) |
+-----+
Empty set

nebula> UPSERT VERTEX ON player "player666" \
  SET age = 30 \
  WHEN name == "Joe" \
  YIELD name AS Name, age AS Age;
+-----+
| Name   | Age   |
+-----+
| __NULL__ | 30   |
+-----+

nebula> UPSERT VERTEX ON player "player666" \
  SET age = 31 \
  WHEN name == "Joe" \
  YIELD name AS Name, age AS Age;
+-----+
| Name   | Age   |
+-----+
| __NULL__ | 30   |
+-----+

nebula> UPSERT VERTEX ON player "player667" \
  SET age = 31 \
  YIELD name AS Name, age AS Age;
+-----+
| Name   | Age   |
+-----+
| __NULL__ | 31   |
+-----+

nebula> UPSERT VERTEX ON player "player668" \
  SET name = "Amber", age = age + 1 \
  YIELD name AS Name, age AS Age;
+-----+
| Name   | Age   |
+-----+
| "Amber" | __NULL__ |
+-----+
```

In the last query of the preceding examples, since `age` has no default value, when the vertex is created, `age` is `NULL`, and `age = age + 1` does not take effect. But if `age` has a default value, `age = age + 1` will take effect. For example:

```
nebula> CREATE TAG IF NOT EXISTS player_with_default(name string, age int DEFAULT 20);
Execution succeeded

nebula> UPSERT VERTEX ON player_with_default "player101" \
  SET age = age + 1 \
  YIELD name AS Name, age AS Age;
+-----+
| Name   | Age   |
+-----+
| __NULL__ | 21   |
+-----+
```

Update a vertex if it exists

If the vertex exists and the `WHEN` conditions are met, the vertex is updated.

```
nebula> FETCH PROP ON player "player101" YIELD properties(vertex);
+-----+
```



```

| properties(VERTEX) |
+-----+
| {age: 36, name: "Tony Parker"} |
+-----+

nebula> UPSERT VERTEX ON player "player101" \
      SET age = age + 2 \
      WHEN name == "Tony Parker" \
      YIELD name AS Name, age AS Age;
+-----+
| Name | Age |
+-----+
| "Tony Parker" | 38 |
+-----+

```

If the vertex exists and the `WHEN` conditions are not met, the update does not take effect.

```

nebula> FETCH PROP ON player "player101" YIELD properties(vertex);
+-----+
| properties(VERTEX) |
+-----+
| {age: 38, name: "Tony Parker"} |
+-----+

nebula> UPSERT VERTEX ON player "player101" \
      SET age = age + 2 \
      WHEN name == "Someone else" \
      YIELD name AS Name, age AS Age;
+-----+
| Name | Age |
+-----+
| "Tony Parker" | 38 |
+-----+

```

Last update: February 8, 2022

4.12 Edge statements

4.12.1 INSERT EDGE

The `INSERT EDGE` statement inserts an edge or multiple edges into a graph space from a source vertex (given by `src_vid`) to a destination vertex (given by `dst_vid`) with a specific rank in Nebula Graph.

When inserting an edge that already exists, `INSERT VERTEX` **overrides** the edge.

Syntax

```
INSERT EDGE [IF NOT EXISTS] <edge_type> ( <prop_name_list> ) VALUES
<src_vid> -> <dst_vid>[@<rank>] : ( <prop_value_list> )
[, <src_vid> -> <dst_vid>[@<rank>] : ( <prop_value_list> ), ...];

<prop_name_list> ::=
[ <prop_name> [, <prop_name> ] ...]

<prop_value_list> ::=
[ <prop_value> [, <prop_value> ] ...]
```

- `IF NOT EXISTS` detects if the edge that you want to insert exists. If it does not exist, a new one will be inserted.

Note

- `IF NOT EXISTS` only detects whether exist and does not detect whether the property values overlap.
- `IF NOT EXISTS` will read to check whether the data exists, which will have a significant impact on performance.
- `<edge_type>` denotes the edge type, which must be created before `INSERT EDGE`. Only one edge type can be specified in this statement.
- `<prop_name_list>` is the property name list in the given `<edge_type>`.
- `src_vid` is the VID of the source vertex. It specifies the start of an edge.
- `dst_vid` is the VID of the destination vertex. It specifies the end of an edge.
- `rank` is optional. It specifies the edge rank of the same edge type. If not specified, the default value is `0`. You can insert many edges with the same edge type, source vertex, and destination vertex by using different rank values.

OpenCypher compatibility

OpenCypher has no such concept as rank.

- `<prop_value_list>` must provide the value list according to `<prop_name_list>`. If the property values do not match the data type in the edge type, an error is returned. When the `NOT NULL` constraint is set for a given property, an error is returned if no property is given. When the default value for a property is `NULL`, you can omit to specify the property value. For details, see [CREATE EDGE](#).

Examples

```
# The following example creates edge type e1 with no property and inserts an edge from vertex "10" to vertex "11" with no property.
nebula> CREATE EDGE IF NOT EXISTS e1();
nebula> INSERT EDGE e1 () VALUES "10"->"11":();

# The following example inserts an edge from vertex "10" to vertex "11" with no property. The edge rank is 1.
nebula> INSERT EDGE e1 () VALUES "10"->"11"@1:();
```

```
nebula> CREATE EDGE IF NOT EXISTS e2 (name string, age int);
nebula> INSERT EDGE e2 (name, age) VALUES "11"->"13":("n1", 1);

# The following example creates edge type e2 with two properties.
nebula> INSERT EDGE e2 (name, age) VALUES \
    "12"->"13":("n1", 1), "13"->"14":("n2", 2);
```

```
# In the following example, the insertion fails because "a13" is not int.
nebula> INSERT EDGE e2 (name, age) VALUES "11"->"13":("n1", "a13");
```

An edge can be inserted/written with property values multiple times. Only the last written values can be read.

```
The following examples insert edge e2 with the new values for multiple times.
nebula> INSERT EDGE e2 (name, age) VALUES "11"->"13":("n1", 12);
nebula> INSERT EDGE e2 (name, age) VALUES "11"->"13":("n1", 13);
nebula> INSERT EDGE e2 (name, age) VALUES "11"->"13":("n1", 14);
nebula> FETCH PROP ON e2 "11"->"13" YIELD edge AS e;
+-----+
| e      |
+-----+
| [:e2 "11"->"13" @0 {age: 14, name: "n1"}] |
+-----+
```

If you insert an edge that already exists with `IF NOT EXISTS`, there will be no modification.

```
# The following example inserts edge e2 from vertex "14" to vertex "15".
nebula> INSERT EDGE e2 (name, age) VALUES "14"->"15"@1:("n1", 12);
# The following example alters the edge with IF NOT EXISTS. But there will be no alteration because edge e2 already exists.
nebula> INSERT EDGE IF NOT EXISTS e2 (name, age) VALUES "14"->"15"@1:("n2", 13);
nebula> FETCH PROP ON e2 "14"->"15"@1 YIELD edge AS e;
+-----+
| e      |
+-----+
| [:e2 "14"->"15" @1 {age: 12, name: "n1"}] |
+-----+
```

Note

- Nebula Graph 3.0.0 allows dangling edges. Therefore, you can write the edge before the source vertex or the destination vertex exists. At this time, you can get the (not written) vertex VID through `<edgetype>._src` or `<edgetype>._dst` (which is not recommended).
- Atomic operation is not guaranteed during the entire process for now. If it fails, please try again. Otherwise, partial writing will occur. At this time, the behavior of reading the data is undefined.
- Concurrently writing the same edge will cause an `edge conflict` error, so please try again later.
- The inserting speed of an edge is about half that of a vertex. Because in the stored process, the insertion of an edge involves two tasks, while the insertion of a vertex involves only one task.

Last update: January 14, 2022

4.12.2 DELETE EDGE

The `DELETE EDGE` statement deletes one edge or multiple edges at a time. You can use `DELETE EDGE` together with pipe operators. For more information, see [PIPE OPERATORS](#).

To delete all the outgoing edges for a vertex, please delete the vertex. For more information, see [DELETE VERTEX](#).

Syntax

```
DELETE EDGE <edge_type> <src_vid> -> <dst_vid>[@<rank>] [, <src_vid> -> <dst_vid>[@<rank>] ...]
```

Examples

```
nebula> DELETE EDGE serve "player100" -> "team204"@0;
```

The following example shows that you can use `DELETE EDGE` together with pipe operators to delete edges that meet the conditions.

```
nebula> GO FROM "player100" OVER follow \
  WHERE dst(edge) == "team204" \
  YIELD src(edge) AS src, dst(edge) AS dst, rank(edge) AS rank \
  | DELETE EDGE follow $-.src->$-.dst @ $-.rank;
```

Last update: January 18, 2022

4.12.3 UPDATE EDGE

The `UPDATE EDGE` statement updates properties on an edge.

In Nebula Graph, `UPDATE EDGE` supports compare-and-swap (CAS).

Syntax

```
UPDATE EDGE ON <edge_type>
<src_vid> -> <dst_vid> [@<rank>]
SET <update_prop>
[WHEN <condition>]
[YIELD <output>]
```

Parameter	Required	Description	Example
ON <edge_type>	Yes	Specifies the edge type. The properties to be updated must be on this edge type.	ON serve
<src_vid>	Yes	Specifies the source vertex ID of the edge.	"player100"
<dst_vid>	Yes	Specifies the destination vertex ID of the edge.	"team204"
<rank>	No	Specifies the rank of the edge.	10
SET <update_prop>	Yes	Specifies the properties to be updated and how they will be updated.	SET start_year = start_year + 1
WHEN <condition>	No	Specifies the filter conditions. If <condition> evaluates to <code>false</code> , the <code>SET</code> clause does not take effect.	WHEN end_year < 2010
YIELD <output>	No	Specifies the output format of the statement.	YIELD start_year AS Start_Year

Example

The following example checks the properties of the edge with the `GO` statement.

```
nebula> GO FROM "player100" \
  OVER serve \
  YIELD properties(edge).start_year, properties(edge).end_year;
+-----+-----+
| serve.start_year | serve.end_year |
+-----+-----+
| 1997             | 2016           |
+-----+-----+
```

The following example updates the `start_year` property and returns the `end_year` and the new `start_year`.

```
nebula> UPDATE EDGE on serve "player100" -> "team204"@0 \
  SET start_year = start_year + 1 \
  WHEN end_year > 2010 \
  YIELD start_year, end_year;
+-----+-----+
| start_year | end_year |
+-----+-----+
| 1998       | 2016     |
+-----+-----+
```

Last update: January 14, 2022

4.12.4 UPSERT EDGE

The `UPSERT` statement is a combination of `UPDATE` and `INSERT`. You can use `UPSERT EDGE` to update the properties of an edge if it exists or insert a new edge if it does not exist.

The performance of `UPSERT` is much lower than that of `INSERT` because `UPSERT` is a read-modify-write serialization operation at the partition level.

Danger

Do not use `UPSERT` for scenarios with highly concurrent writes. You can use `UPDATE` or `INSERT` instead.

Syntax

```
UPSERT EDGE ON <edge_type>
<src_vid> -> <dst_vid> [@rank]
SET <update_prop>
[WHEN <condition>]
[YIELD <properties>]
```

Parameter	Required	Description	Example
ON <edge_type>	Yes	Specifies the edge type. The properties to be updated must be on this edge type.	ON serve
<src_vid>	Yes	Specifies the source vertex ID of the edge.	"player100"
<dst_vid>	Yes	Specifies the destination vertex ID of the edge.	"team204"
<rank>	No	Specifies the rank of the edge.	10
SET <update_prop>	Yes	Specifies the properties to be updated and how they will be updated.	SET start_year = start_year +1
WHEN <condition>	No	Specifies the filter conditions.	WHEN end_year < 2010
YIELD <output>	No	Specifies the output format of the statement.	YIELD start_year AS Start_Year

Insert an edge if it does not exist

If an edge does not exist, it is created no matter the conditions in the `WHEN` clause are met or not, and the `SET` clause takes effect. The property values of the new edge depend on:

- How the `SET` clause is defined.
- Whether the property has a default value.

For example, if:

- The edge to be inserted will have properties `start_year` and `end_year` based on the edge type `serve`.
- The `SET` clause specifies that `end_year = 2021`.

Then the property values in different cases are listed as follows:

Are WHEN conditions met	If properties have default values	Value of start_year	Value of end_year
Yes	Yes	The default value	2021
Yes	No	NULL	2021
No	Yes	The default value	2021
No	No	NULL	2021

Here are some examples:

```
// This example checks if the following three vertices have any outgoing serve edge. The result "Empty set" indicates that such an edge does not exist.
nebula> GO FROM "player666", "player667", "player668" \
  OVER serve \
  YIELD properties(edge).start_year, properties(edge).end_year;
+-----+
| properties(EDGE).start_year | properties(EDGE).end_year |
+-----+
Empty set

nebula> UPSERT EDGE on serve \
  "player666" -> "team200"@0 \
  SET end_year = 2021 \
  WHEN end_year == 2010 \
  YIELD start_year, end_year;
+-----+
| start_year | end_year |
+-----+
| __NULL__   | 2021    |
+-----+

nebula> UPSERT EDGE on serve \
  "player666" -> "team200"@0 \
  SET end_year = 2022 \
  WHEN end_year == 2010 \
  YIELD start_year, end_year;
+-----+
| start_year | end_year |
+-----+
| __NULL__   | 2021    |
+-----+

nebula> UPSERT EDGE on serve \
  "player667" -> "team200"@0 \
  SET end_year = 2022 \
  YIELD start_year, end_year;
+-----+
| start_year | end_year |
+-----+
| __NULL__   | 2022    |
+-----+

nebula> UPSERT EDGE on serve \
  "player668" -> "team200"@0 \
  SET start_year = 2000, end_year = end_year + 1 \
  YIELD start_year, end_year;
+-----+
| start_year | end_year |
+-----+
| 2000       | __NULL__ |
+-----+
```

In the last query of the preceding example, since `end_year` has no default value, when the edge is created, `end_year` is `NULL`, and `end_year = end_year + 1` does not take effect. But if `end_year` has a default value, `end_year = end_year + 1` will take effect. For example:

```
nebula> CREATE EDGE IF NOT EXISTS serve_with_default(start_year int, end_year int DEFAULT 2010);
Execution succeeded

nebula> UPSERT EDGE on serve_with_default \
  "player668" -> "team200" \
  SET end_year = end_year + 1 \
  YIELD start_year, end_year;
+-----+
| start_year | end_year |
+-----+
| __NULL__   | 2011    |
+-----+
```

Update an edge if it exists

If the edge exists and the `WHEN` conditions are met, the edge is updated.

```
nebula> MATCH (v:player{name:"Ben Simmons"})-[e:serve]-(v2) \
        RETURN e;
+-----+
| e      |
+-----+
| [:serve "player149"->"team219" @0 {end_year: 2019, start_year: 2016}] |
+-----+

nebula> UPSERT EDGE on serve \
        "player149" -> "team219" \
        SET end_year = end_year + 1 \
        WHEN start_year == 2016 \
        YIELD start_year, end_year;
+-----+
| start_year | end_year |
+-----+
| 2016       | 2020    |
+-----+
```

If the edge exists and the `WHEN` conditions are not met, the update does not take effect.

```
nebula> MATCH (v:player{name:"Ben Simmons"})-[e:serve]-(v2) \
        RETURN e;
+-----+
| e      |
+-----+
| [:serve "player149"->"team219" @0 {end_year: 2020, start_year: 2016}] |
+-----+

nebula> UPSERT EDGE on serve \
        "player149" -> "team219" \
        SET end_year = end_year + 1 \
        WHEN start_year != 2016 \
        YIELD start_year, end_year;
+-----+
| start_year | end_year |
+-----+
| 2016       | 2020    |
+-----+
```

Last update: February 8, 2022

4.13 Native index statements

4.13.1 Index overview

Indexes are built to fast process graph queries. Nebula Graph supports two kinds of indexes: native indexes and full-text indexes. This topic introduces the index types and helps choose the right index.

Native indexes

Native indexes allow querying data based on a given property. Features are as follows.

- There are two kinds of native indexes: tag index and edge type index.
- Native indexes must be updated manually. You can use the `REBUILD INDEX` statement to update native indexes.
- Native indexes support indexing multiple properties on a tag or an edge type (composite indexes), but do not support indexing across multiple tags or edge types.

OPERATIONS ON NATIVE INDEXES

- `CREATE INDEX`
- `SHOW CREATE INDEX`
- `SHOW INDEXES`
- `DESCRIBE INDEX`
- `REBUILD INDEX`
- `SHOW INDEX STATUS`
- `DROP INDEX`
- `LOOKUP`
- `MATCH`

Full-text indexes

Full-text indexes are used to do prefix, wildcard, regexp, and fuzzy search on a string property. Features are as follows.

- Full-text indexes allow indexing just one property.
- Only strings within a specified length (no longer than 256 bytes) are indexed.
- Full-text indexes do not support logical operations such as `AND`, `OR`, and `NOT`.

Note

To do complete string matches, use native indexes.

OPERATIONS ON FULL-TEXT INDEXES

Before doing any operations on full-text indexes, please make sure that you deploy full-text indexes. Details on full-text indexes deployment, see [Deploy Elasticsearch](#) and [Deploy Listener](#).

At this time, full-text indexes are created automatically on the Elasticsearch cluster. And rebuilding or altering full-text indexes are not supported. To drop full-text indexes, you need to drop them on the Elasticsearch cluster manually.

To query full-text indexes, see [Search with full-text indexes](#).

Null values

Indexes do not support indexing null values.

Range queries

In addition to querying single results from native indexes, you can also do range queries. Not all the native indexes support range queries. You can only do range searches for numeric, date, and time type properties.

Last update: January 14, 2022

4.13.2 CREATE INDEX

Prerequisites

Before you create an index, make sure that the relative tag or edge type is created. For how to create tags or edge types, see [CREATE TAG](#) and [CREATE EDGE](#).

For how to create full-text indexes, see [Deploy full-text index](#).

Must-read for using indexes

The concept and using restrictions of indexes are comparatively complex. You can use it together with [LOOKUP](#) and [MATCH](#) statements.

You can use [CREATE INDEX](#) to add native indexes for the existing tags, edge types, or properties. They are usually called as tag indexes, edge type indexes, and property indexes.

- Tag indexes and edge type indexes apply to queries related to the tag and the edge type, but do not apply to queries that are based on certain properties on the tag. For example, you can use [LOOKUP](#) to retrieve all the vertices with the tag `player`.
- Property indexes apply to property-based queries. For example, you can use the `age` property to retrieve the VID of all vertices that meet `age == 19`.

If a property index `i_TA` is created for the property `A` of the tag `T`, the indexes can be replaced as follows (the same for edge type indexes):

- The query engine can use `i_TA` to replace `i_T`.
- In the [MATCH](#) statement, `i_T` cannot replace `i_TA` for querying properties.
- In the [LOOKUP](#) statement, `i_T` may replace `i_TA` for querying properties.

Legacy version compatibility

In previous releases, the tag or edge type index in the [LOOKUP](#) statement cannot replace the property index for property queries.

Although the same results can be obtained by using alternative indexes for queries, the query performance varies according to the selected index.

Caution

Indexes can dramatically reduce the write performance. The performance reduction can be as much as 90% or even more. **DO NOT** use indexes in production environments unless you are fully aware of their influences on your service.

Indexes cannot make queries faster. It can only locate a vertex or an edge according to properties or count the number of vertices or edges.

Long indexes decrease the scan performance of the Storage Service and use more memory. We suggest that you set the indexing length the same as that of the longest string to be indexed. The longest index length is 255 bytes. Strings longer than 255 bytes will be truncated.

If you must use indexes, we suggest that you:

1. Import the data into Nebula Graph.
2. Create indexes.
3. [Rebuild indexes](#).
4. After the index is created and the data is imported, you can use [LOOKUP](#) or [MATCH](#) to retrieve the data. You do not need to specify which indexes to use in a query, Nebula Graph figures that out by itself.

Note

If you create an index before importing the data, the importing speed will be extremely slow due to the reduction in the write performance.

Keep `--disable_auto_compaction = false` during daily incremental writing.

The newly created index will not take effect immediately. Trying to use a newly created index (such as `LOOKUP` or `REBUILD INDEX`) may fail and return `can't find xxx in the space` because the creation is implemented asynchronously. To make sure the follow-up operations work as expected, Wait for two heartbeat cycles, i.e., 20 seconds. To change the heartbeat interval, modify the `heartbeat_interval_secs` in the [configuration files](#) for all services.

Danger

After creating a new index, or dropping the old index and creating a new one with the same name again, you must `REBUILD INDEX`. Otherwise, these data cannot be returned in the `MATCH` and `LOOKUP` statements.

Syntax

```
CREATE {TAG | EDGE} INDEX [IF NOT EXISTS] <index_name> ON {<tag_name> | <edge_name>} ([<prop_name_list>]) [COMMENT = '<comment>'];
```

Parameter	Description
TAG \ EDGE	Specifies the index type that you want to create.
IF NOT EXISTS	Detects if the index that you want to create exists. If it does not exist, a new one will be created.
<index_name>	The name of the index. It must be unique in a graph space. A recommended way of naming is <code>i_tagName_propName</code> . The name of the index starts with a letter, supports 1 to 4 bytes UTF-8 encoded characters, such as English letters (case-sensitive), digits, and Chinese characters, but does not support special characters except underscores. To use special characters or reserved keywords as identifiers, quote them with backticks. For more information, see Keywords and reserved words .
<tag_name> \ <edge_name>	Specifies the name of the tag or edge associated with the index.
<prop_name_list>	To index a variable-length string property, you must use <code>prop_name(length)</code> to specify the index length. To index a tag or an edge type, ignore the <code>prop_name_list</code> .
COMMENT	The remarks of the index. The maximum length is 256 bytes. By default, there will be no comments on an index.

Create tag/edge type indexes

```
nebula> CREATE TAG INDEX IF NOT EXISTS player_index on player();
```

```
nebula> CREATE EDGE INDEX IF NOT EXISTS follow_index on follow();
```

After indexing a tag or an edge type, you can use the `LOOKUP` statement to retrieve the VID of all vertices with the tag, or the source vertex ID, destination vertex ID, and ranks of all edges with the edge type. For more information, see [LOOKUP](#).

Create single-property indexes

```
nebula> CREATE TAG INDEX IF NOT EXISTS player_index_0 on player(name(10));
```

The preceding example creates an index for the `name` property on all vertices carrying the `player` tag. This example creates an index using the first 10 characters of the `name` property.

```
# To index a variable-length string property, you need to specify the index length.
nebula> CREATE TAG IF NOT EXISTS var_string(p1 string);
nebula> CREATE TAG INDEX IF NOT EXISTS var ON var_string(p1(10));
```

```
# To index a fixed-length string property, you do not need to specify the index length.
nebula> CREATE TAG IF NOT EXISTS fix_string(p1 FIXED_STRING(10));
nebula> CREATE TAG INDEX IF NOT EXISTS fix ON fix_string(p1);
```

```
nebula> CREATE EDGE INDEX IF NOT EXISTS follow_index_0 on follow(degree);
```

Create composite property indexes

An index on multiple properties on a tag (or an edge type) is called a composite property index.

```
nebula> CREATE TAG INDEX IF NOT EXISTS player_index_1 on player(name(10), age);
```

Caution

Creating composite property indexes across multiple tags or edge types is not supported.

Note

Nebula Graph follows the left matching principle to select indexes.

Last update: January 21, 2022

4.13.3 SHOW INDEXES

`SHOW INDEXES` shows the defined tag or edge type indexes names in the current graph space.

Syntax

```
SHOW {TAG | EDGE} INDEXES
```

Examples

```
nebula> SHOW TAG INDEXES;
+-----+-----+-----+
| Index Name      | By Tag   | Columns      |
+-----+-----+-----+
| "fix"           | "fix_string" | ["p1"]       |
| "player_index_0" | "player"    | ["name"]     |
| "player_index_1" | "player"    | ["name", "age"] |
| "var"           | "var_string" | ["p1"]       |
+-----+-----+-----+

nebula> SHOW EDGE INDEXES;
+-----+-----+-----+
| Index Name      | By Edge  | Columns      |
+-----+-----+-----+
| "follow_index"  | "follow" | []           |
+-----+-----+-----+
```

Legacy version compatibility

In Nebula Graph 2.x, the `SHOW TAG/EDGE INDEXES` statement only returns `Names` .

Last update: February 8, 2022

4.13.4 SHOW CREATE INDEX

`SHOW CREATE INDEX` shows the statement used when creating a tag or an edge type. It contains detailed information about the index, such as its associated properties.

Syntax

```
SHOW CREATE {TAG | EDGE} INDEX <index_name>;
```

Examples

You can run `SHOW TAG INDEXES` to list all tag indexes, and then use `SHOW CREATE TAG INDEX` to show the information about the creation of the specified index.

```
nebula> SHOW TAG INDEXES;
+-----+-----+-----+
| Index Name | By Tag | Columns |
+-----+-----+-----+
| "player_index_0" | "player" | [] |
| "player_index_1" | "player" | ["name"] |
+-----+-----+-----+

nebula> SHOW CREATE TAG INDEX player_index_1;
+-----+-----+-----+
| Tag Index Name | Create Tag Index |
+-----+-----+-----+
| "player_index_1" | "CREATE TAG INDEX `player_index_1` ON `player` ( |
| | `name`(20) |
| | )" |
+-----+-----+-----+
```

Edge indexes can be queried through a similar approach.

```
nebula> SHOW EDGE INDEXES;
+-----+-----+-----+
| Index Name | By Edge | Columns |
+-----+-----+-----+
| "follow_index" | "follow" | [] |
+-----+-----+-----+

nebula> SHOW CREATE EDGE INDEX follow_index;
+-----+-----+-----+
| Edge Index Name | Create Edge Index |
+-----+-----+-----+
| "follow_index" | "CREATE EDGE INDEX `follow_index` ON `follow` ( |
| | )" |
+-----+-----+-----+
```

Legacy version compatibility

In Nebula Graph 2.0.1, the `SHOW TAG/EDGE INDEXES` statement only returns `Names`.

Last update: January 14, 2022

4.13.5 DESCRIBE INDEX

`DESCRIBE INDEX` can get the information about the index with a given name, including the property name (Field) and the property type (Type) of the index.

Syntax

```
DESCRIBE {TAG | EDGE} INDEX <index_name>;
```

Examples

```
nebula> DESCRIBE TAG INDEX player_index_0;
+-----+-----+
| Field | Type           |
+-----+-----+
| "name" | "fixed_string(30)" |
+-----+-----+

nebula> DESCRIBE TAG INDEX player_index_1;
+-----+-----+
| Field | Type           |
+-----+-----+
| "name" | "fixed_string(10)" |
| "age"  | "int64"         |
+-----+-----+
```

Last update: January 14, 2022

4.13.6 REBUILD INDEX

Danger

If data is updated or inserted before the creation of the index, you must rebuild the indexes **manually** to make sure that the indexes contain the previously added data. Otherwise, you cannot use `LOOKUP` and `MATCH` to query the data based on the index. If the index is created before any data insertion, there is no need to rebuild the index.

During the rebuilding, all queries skip the index and perform sequential scans. This means that the return results can be different because not all the data is indexed during rebuilding.

You can use `REBUILD INDEX` to rebuild the created tag or edge type index. For details on how to create an index, see [CREATE INDEX](#).

Syntax

```
REBUILD {TAG | EDGE} INDEX [<index_name_list>];

<index_name_list>:=
[index_name [, index_name] ...]
```

- Multiple indexes are permitted in a single `REBUILD` statement, separated by commas. When the index name is not specified, all tag or edge indexes are rebuilt.
- After the rebuilding is complete, you can use the `SHOW {TAG | EDGE} INDEX STATUS` command to check if the index is successfully rebuilt. For details on index status, see [SHOW INDEX STATUS](#).

Examples

```
nebula> CREATE TAG IF NOT EXISTS person(name string, age int, gender string, email string);
nebula> CREATE TAG INDEX IF NOT EXISTS single_person_index ON person(name(10));

# The following example rebuilds an index and returns the job ID.
nebula> REBUILD TAG INDEX single_person_index;
+-----+
| New Job Id |
+-----+
| 31         |
+-----+

# The following example checks the index status.
nebula> SHOW TAG INDEX STATUS;
+-----+-----+
| Name           | Index Status |
+-----+-----+
| "single_person_index" | "FINISHED"   |
+-----+-----+

# You can also use "SHOW JOB <job_id>" to check if the rebuilding process is complete.
nebula> SHOW JOB 31;
+-----+-----+-----+-----+-----+
| Job Id(TaskId) | Command(Dest) | Status | Start Time | Stop Time |
+-----+-----+-----+-----+-----+
| 31             | "REBUILD_TAG_INDEX" | "FINISHED" | 2021-07-07T09:04:24.000 | 2021-07-07T09:04:24.000 |
| 0             | "storeded1"      | "FINISHED" | 2021-07-07T09:04:24.000 | 2021-07-07T09:04:28.000 |
| 1             | "storeded2"      | "FINISHED" | 2021-07-07T09:04:24.000 | 2021-07-07T09:04:28.000 |
| 2             | "storeded0"      | "FINISHED" | 2021-07-07T09:04:24.000 | 2021-07-07T09:04:28.000 |
+-----+-----+-----+-----+-----+
```

Nebula Graph creates a job to rebuild the index. The job ID is displayed in the preceding return message. To check if the rebuilding process is complete, use the `SHOW JOB <job_id>` statement. For more information, see [SHOW JOB](#).

Last update: February 8, 2022

4.13.7 SHOW INDEX STATUS

`SHOW INDEX STATUS` returns the name of the created tag or edge type index and its status of job.

The index status includes:

- `QUEUE` : The job is in a queue.
- `RUNNING` : The job is running.
- `FINISHED` : The job is finished.
- `FAILED` : The job has failed.
- `STOPPED` : The job has stopped.
- `INVALID` : The job is invalid.

Note

For details on how to create an index, see [CREATE INDEX](#).

Syntax

```
SHOW {TAG | EDGE} INDEX STATUS;
```

Example

```
nebula> SHOW TAG INDEX STATUS;
+-----+-----+
| Name           | Index Status |
+-----+-----+
| "player_index_0" | "FINISHED"   |
| "player_index_1" | "FINISHED"   |
+-----+-----+
```

Last update: January 14, 2022

4.13.8 DROP INDEX

`DROP INDEX` removes an existing index from the current graph space.

Prerequisite

Running the `DROP INDEX` statement requires some **privileges** of `DROP TAG INDEX` and `DROP EDGE INDEX` in the given graph space. Otherwise, Nebula Graph throws an error.

Syntax

```
DROP {TAG | EDGE} INDEX [IF EXISTS] <index_name>;
```

`IF NOT EXISTS` : Detects whether the index that you want to drop exists. If it exists, it will be dropped.

Example

```
nebula> DROP TAG INDEX player_index_0;
```

Last update: January 14, 2022

4.14 Full-text index statements

4.14.1 Full-text index restrictions

Caution

This topic introduces the restrictions for full-text indexes. Please read the restrictions very carefully before using the full-text indexes.

For now, full-text search has the following limitations:

1. Currently, full-text search supports `LOOKUP` statements only.
2. The maximum indexing string length is 256 bytes. The part of data that exceeds 256 bytes will not be indexed.
3. If there is a full-text index on the tag/edge type, the tag/edge type cannot be deleted or modified.
4. One tag/edge type can only have one full-text index.
5. The type of properties must be `string`.
6. Full-text index can not be applied to search multiple tags/edge types.
7. Sorting for the returned results of the full-text search is not supported. Data is returned in the order of data insertion.
8. Full-text index can not search properties with value `NULL`.
9. Altering Elasticsearch indexes is not supported at this time.
10. The pipe operator is not supported.
11. `WHERE` clauses supports full-text search only working on single terms.
12. Full-text indexes are not deleted together with the graph space.
13. Make sure that you start the Elasticsearch cluster and Nebula Graph at the same time. If not, the data writing on the Elasticsearch cluster can be incomplete.
14. Do not contain `'` or `\` in the vertex or edge values. If not, an error will be caused in the Elasticsearch cluster storage.
15. It may take a while for Elasticsearch to create indexes. If Nebula Graph warns no index is found, wait for the index to take effect (however, the waiting time is unknown and there is no code to check).
16. Nebula Graph clusters deployed with K8s do not support the full-text search feature.

Last update: January 14, 2022

4.14.2 Deploy full-text index

Nebula Graph full-text indexes are powered by [Elasticsearch](#). This means that you can use Elasticsearch full-text query language to retrieve what you want. Full-text indexes are managed through built-in procedures. They can be created only for variable `STRING` and `FIXED_STRING` properties when the listener cluster and the Elasticsearch cluster are deployed.

Precaution

Before you start using the full-text index, please make sure that you know the [restrictions](#).

Deploy Elasticsearch cluster

To deploy an Elasticsearch cluster, see [Kubernetes Elasticsearch deployment](#) or [Elasticsearch installation](#).

When the Elasticsearch cluster is started, add the template file for the Nebula Graph full-text index. For more information on index templates, see [Elasticsearch Document](#).

Take the following sample template for example:

```
{
  "template": "nebula*",
  "settings": {
    "index": {
      "number_of_shards": 3,
      "number_of_replicas": 1
    }
  },
  "mappings": {
    "properties": {
      "tag_id" : { "type" : "long" },
      "column_id" : { "type" : "text" },
      "value" : { "type" : "keyword" }
    }
  }
}
```

Make sure that you specify the following fields in strict accordance with the preceding template format:

```
"template": "nebula*"
"tag_id" : { "type" : "long" },
"column_id" : { "type" : "text" },
"value" : { "type" : "keyword" }
```

Caution

When creating a full-text index, start the index name with `nebula`.

For example:

```
curl -H "Content-Type: application/json; charset=utf-8" -XPUT http://127.0.0.1:9200/_template/nebula_index_template -d '{
  "template": "nebula*",
  "settings": {
    "index": {
      "number_of_shards": 3,
      "number_of_replicas": 1
    }
  },
  "mappings": {
    "properties": {
      "tag_id" : { "type" : "long" },
      "column_id" : { "type" : "text" },
      "value" : { "type" : "keyword" }
    }
  }
}'
```

You can configure the Elasticsearch to meet your business needs. To customize the Elasticsearch, see [Elasticsearch Document](#).

Sign in to the text search clients

When the Elasticsearch cluster is deployed, use the `SIGN IN` statement to sign in to the Elasticsearch clients. Multiple `elastic_ip:port` pairs are separated with commas. You must use the IPs and the port number in the configuration file for the Elasticsearch.

SYNTAX

```
SIGN IN TEXT SERVICE [(<elastic_ip:port> [, "<username>", "<password>"]), (<elastic_ip:port>), ...];
```

EXAMPLE

```
nebula> SIGN IN TEXT SERVICE (127.0.0.1:9200);
```

Note

Elasticsearch does not have a username or password by default. If you configured a username and password, you need to specify them in the `SIGN IN` statement.

Show text search clients

The `SHOW TEXT SEARCH CLIENTS` statement can list the text search clients.

SYNTAX

```
SHOW TEXT SEARCH CLIENTS;
```

EXAMPLE

```
nebula> SHOW TEXT SEARCH CLIENTS;
+-----+-----+
| Host          | Port |
+-----+-----+
| "127.0.0.1"   | 9200 |
| "127.0.0.1"   | 9200 |
| "127.0.0.1"   | 9200 |
+-----+-----+
```

Sign out to the text search clients

The `SIGN OUT TEXT SERVICE` statement can sign out all the text search clients.

SYNTAX

```
SIGN OUT TEXT SERVICE;
```

EXAMPLE

```
nebula> SIGN OUT TEXT SERVICE;
```

Last update: January 14, 2022

4.14.3 Deploy Raft Listener for Nebula Storage service

Full-text index data is written to the Elasticsearch cluster asynchronously. The Raft Listener (Listener for short) is a separate process that fetches data from the Storage Service and writes them into the Elasticsearch cluster.

Prerequisites

- You have read and fully understood the [restrictions](#) for using full-text indexes.
- You have [deployed a Nebula Graph cluster](#).
- You have [deploy a Elasticsearch cluster](#).
- You have prepared at least one extra Storage Server. To use the full-text search, you must run one or more Storage Server as the Raft Listener.

Precautions

- The Storage Service that you want to run as the Listener must have the same or later release with all the other Nebula Graph services in the cluster.
- For now, you can only add all Listeners to a graph space once and for all. Trying to add a new Listener to a graph space that already has a Listener will fail. To add all Listeners, set them [in one statement](#).

Deployment process

STEP 1: INSTALL THE STORAGE SERVICE

The Listener process and the storaged process use the same binary file. However, their configuration files and using ports are different. You can install Nebula Graph on all servers that need to deploy a Listener, but only the Storage service can be used. For details, see [Install Nebula Graph by RPM or DEB Package](#).

STEP 2: PREPARE THE CONFIGURATION FILE FOR THE LISTENER

You have to prepare a corresponding configuration file on the machine that you want to deploy a Listener. The file must be named as `nebula-storaged-listener.conf` and stored in the `etc` directory. A [template](#) is provided for your reference. Note that the file suffix `.production` should be removed.

Most configurations are the same as the configurations of [Storage Service](#). This topic only introduces the differences.

Name	Default value	Description
<code>daemonize</code>	<code>true</code>	When set to <code>true</code> , the process is a daemon process.
<code>pid_file</code>	<code>pids_listener/nebula-storaged.pid</code>	The file that records the process ID.
<code>meta_server_addrs</code>	-	IP addresses and ports of all Meta services. Multiple Meta services are separated by commas.
<code>local_ip</code>	-	The local IP address of the Listener service.
<code>port</code>	-	The listening port of the RPC daemon of the Listener service.
<code>heartbeat_interval_secs</code>	<code>10</code>	The heartbeat interval of the Meta service. The unit is second (s).
<code>listener_path</code>	<code>data/listener</code>	The WAL directory of the Listener. Only one directory is allowed.
<code>data_path</code>	<code>data</code>	For compatibility reasons, this parameter can be ignored. Fill in the default value <code>data</code> .
<code>part_man_type</code>	<code>memory</code>	The type of the part manager. Optional values are <code>memory</code> and <code>meta</code> .
<code>rocksdb_batch_size</code>	<code>4096</code>	The default reserved bytes for batch operations.
<code>rocksdb_block_cache</code>	<code>4</code>	The default block cache size of BlockBasedTable. The unit is Megabyte (MB).
<code>engine_type</code>	<code>rocksdb</code>	The type of the Storage engine, such as <code>rocksdb</code> , <code>memory</code> , etc.
<code>part_type</code>	<code>simple</code>	The type of the part, such as <code>simple</code> , <code>consensus</code> , etc.

Note

Use real IP addresses in the configuration file instead of domain names or loopback IP addresses such as `127.0.0.1`.

STEP 3: START LISTENERS

Run the following command to start the Listener.

```
./bin/nebula-storaged --flagfile <listener_config_path>/nebula-storaged-listener.conf
```

`${listener_config_path}` is the path where you store the Listener configuration file.

STEP 4: ADD LISTENERS TO NEBULA GRAPH

Connect to [Nebula Graph](#) and run `USE <space>` to enter the graph space that you want to create full-text indexes for. Then run the following statement to add a Listener into Nebula Graph.

```
ADD LISTENER ELASTICSEARCH <listener_ip:port> [, <listener_ip:port>, ...]
```

Warning

You must use real IPs for a Listener.

Add all Listeners in one statement completely.

```
nebula> ADD LISTENER ELASTICSEARCH 192.168.8.5:9789,192.168.8.6:9789;
```


Show Listeners

Run the `SHOW LISTENER` statement to list all Listeners.

EXAMPLE

```
nebula> SHOW LISTENER;
+-----+-----+-----+-----+
| PartId | Type           | Host                               | Status |
+-----+-----+-----+-----+
| 1       | "ELASTICSEARCH" | "[192.168.8.5:46780]"             | "ONLINE" |
| 2       | "ELASTICSEARCH" | "[192.168.8.5:46780]"             | "ONLINE" |
| 3       | "ELASTICSEARCH" | "[192.168.8.5:46780]"             | "ONLINE" |
+-----+-----+-----+-----+
```

Remove Listeners

Run the `REMOVE LISTENER ELASTICSEARCH` statement to remove all Listeners in a graph space.

EXAMPLE

```
nebula> REMOVE LISTENER ELASTICSEARCH;
```

Danger

After the Listener is deleted, it cannot be added again. Therefore, the synchronization to the ES cluster cannot be continued and the text index data will be incomplete. If needed, you can only recreate the graph space.

Next

After deploying the [Elasticsearch cluster](#) and the Listener, full-text indexes are created automatically on the Elasticsearch cluster. Users can do full-text search now. For more information, see [Full-Text search](#).

Last update: January 18, 2022

4.14.4 Full-text indexes

Full-text indexes are used to do prefix, wildcard, regexp, and fuzzy search on a string property.

You can use the `WHERE` clause to specify the search strings in `LOOKUP` statements.

Prerequisite

Before using the full-text index, make sure that you have deployed a Elasticsearch cluster and a Listener cluster. For more information, see [Deploy Elasticsearch](#) and [Deploy Listener](#).

Precaution

Before using the full-text index, make sure that you know the [restrictions](#).

Natural language full-text search

A natural language search interprets the search string as a phrase in natural human language. The search is case-insensitive. By default, each substring (separated by spaces) will be searched separately. For example, there are three vertices with the tag `player`. The tag `player` contains the property `name`. The `name` of these three vertices are `Kevin Durant`, `Tim Duncan`, and `David Beckham`. Now that the full-text index of `player.name` is established, these three vertices will be queried when using the prefix search statement `LOOKUP ON player WHERE PREFIX(player.name,"d");`.

Syntax

CREATE FULL-TEXT INDEXES

```
CREATE FULLTEXT {TAG | EDGE} INDEX <index_name> ON {<tag_name> | <edge_name>} ([<prop_name_list>]);
```

SHOW FULL-TEXT INDEXES

```
SHOW FULLTEXT INDEXES;
```

REBUILD FULL-TEXT INDEXES

```
REBUILD FULLTEXT INDEX;
```

DROP FULL-TEXT INDEXES

```
DROP FULLTEXT INDEX <index_name>;
```

USE QUERY OPTIONS

```
LOOKUP ON {<tag> | <edge_type>} WHERE <expression> [YIELD <return_list>];

<expression> ::=
    PREFIX | WILDCARD | REGEXP | FUZZY
```

```
<return_list>
  <prop_name> [AS <prop_alias>] [, <prop_name> [AS <prop_alias>] ...]
```

- `PREFIX(schema_name.prop_name, prefix_string, row_limit, timeout)`
- `WILDCARD(schema_name.prop_name, wildcard_string, row_limit, timeout)`
- `REGEXP(schema_name.prop_name, regexp_string, row_limit, timeout)`
- `FUZZY(schema_name.prop_name, fuzzy_string, fuzziness, operator, row_limit, timeout)`
- `fuzziness` (optional): Maximum edit distance allowed for matching. The default value is `AUTO`. For other valid values and more information, see [Elasticsearch document](#).
- `operator` (optional): Boolean logic used to interpret the text. Valid values are `OR` (default) and `AND`.
- `row_limit` (optional): Specifies the number of rows to return. The default value is `100`.
- `timeout` (optional): Specifies the timeout time. The default value is `200ms`.

Examples

```
// This example creates the graph space.
nebula> CREATE SPACE IF NOT EXISTS basketballplayer (partition_num=3, replica_factor=1, vid_type=fixed_string(30));

// This example signs in the text service.
nebula> SIGN IN TEXT SERVICE (127.0.0.1:9200);

// This example switches the graph space.
nebula> USE basketballplayer;

// This example adds the listener to the Nebula Graph cluster.
nebula> ADD LISTENER ELASTICSEARCH 192.168.8.5:9789;

// This example creates the tag.
nebula> CREATE TAG IF NOT EXISTS player(name string, age int);

// This example creates the native index.
nebula> CREATE TAG INDEX IF NOT EXISTS name ON player(name(20));

// This example rebuilds the native index.
nebula> REBUILD TAG INDEX;

// This example creates the full-text index. The index name starts with "nebula".
nebula> CREATE FULLTEXT TAG INDEX nebula_index_1 ON player(name);

// This example rebuilds the full-text index.
nebula> REBUILD FULLTEXT INDEX;

// This example shows the full-text index.
nebula> SHOW FULLTEXT INDEXES;
+-----+-----+-----+-----+
| Name           | Schema Type | Schema Name | Fields |
+-----+-----+-----+-----+
| "nebula_index_1" | "Tag"       | "player"    | "name" |
+-----+-----+-----+-----+

// This example inserts the test data.
nebula> INSERT VERTEX player(name, age) VALUES \
  "Russell Westbrook": ("Russell Westbrook", 30), \
  "Chris Paul": ("Chris Paul", 33), \
  "Boris Diaw": ("Boris Diaw", 36), \
  "David West": ("David West", 38), \
  "Danny Green": ("Danny Green", 31), \
  "Tim Duncan": ("Tim Duncan", 42), \
  "James Harden": ("James Harden", 29), \
  "Tony Parker": ("Tony Parker", 36), \
  "Aron Baynes": ("Aron Baynes", 32), \
  "Ben Simmons": ("Ben Simmons", 22), \
  "Blake Griffin": ("Blake Griffin", 30);

// These examples run test queries.
nebula> LOOKUP ON player WHERE PREFIX(player.name, "B") YIELD id(vertex);
+-----+-----+
| id(vertex) |
+-----+
| "Boris Diaw" |
| "Ben Simmons" |
| "Blake Griffin" |
+-----+

nebula> LOOKUP ON player WHERE WILDCARD(player.name, "*ri*") YIELD player.name, player.age;
+-----+-----+
| name | age |
+-----+-----+
```

```

| "Chris Paul"      | 33 |
| "Boris Diaw"     | 36 |
| "Blake Griffin"  | 30 |
+-----+-----+

nebula> LOOKUP ON player WHERE WILDCARD(player.name, "**ri*") | YIELD count(*);
+-----+
| count(*) |
+-----+
| 3        |
+-----+

nebula> LOOKUP ON player WHERE REGEXP(player.name, "R.*") YIELD player.name, player.age;
+-----+-----+
| name                | age |
+-----+-----+
| "Russell Westbrook" | 30  |
+-----+-----+

nebula> LOOKUP ON player WHERE REGEXP(player.name, ".") YIELD id(vertex);
+-----+-----+
| id(VERTEX)          |
+-----+-----+
| "Danny Green"       |
| "David West"        |
...

nebula> LOOKUP ON player WHERE FUZZY(player.name, "Tim Duncan", AUTO, OR) YIELD player.name;
+-----+-----+
| name                |
+-----+-----+
| "Tim Duncan"        |
+-----+-----+

// This example drops the full-text index.
nebula> DROP FULLTEXT INDEX nebula_index_1;

```

Last update: January 14, 2022

4.15 Subgraph and path

4.15.1 GET SUBGRAPH

The `GET SUBGRAPH` statement retrieves information of vertices and edges reachable from the source vertices of the specified edge types and returns information of the subgraph.

Syntax

```
GET SUBGRAPH [WITH PROP] [<step_count> STEPS] FROM {<vid>, <vid>...}
[{{IN | OUT | BOTH} <edge_type>, <edge_type>...}]
YIELD {[VERTICES AS <vertex_alias>] [, EDGES AS <edge_alias>]};
```


- `WITH PROP` shows the properties. If not specified, the properties will be hidden.
- `step_count` specifies the number of hops from the source vertices and returns the subgraph from 0 to `step_count` hops. It must be a non-negative integer. Its default value is 1.
- `vid` specifies the vertex IDs.
- `edge_type` specifies the edge type. You can use `IN`, `OUT`, and `BOTH` to specify the traversal direction of the edge type. The default is `BOTH`.
- `YIELD` defines the output that needs to be returned. You can return only vertices or edges. A column alias must be set.

Note

The path type of `GET SUBGRAPH` is `trail`. Only vertices can be repeatedly visited in graph traversal. For more information, see [Path](#).

Examples

The following graph is used as the sample.

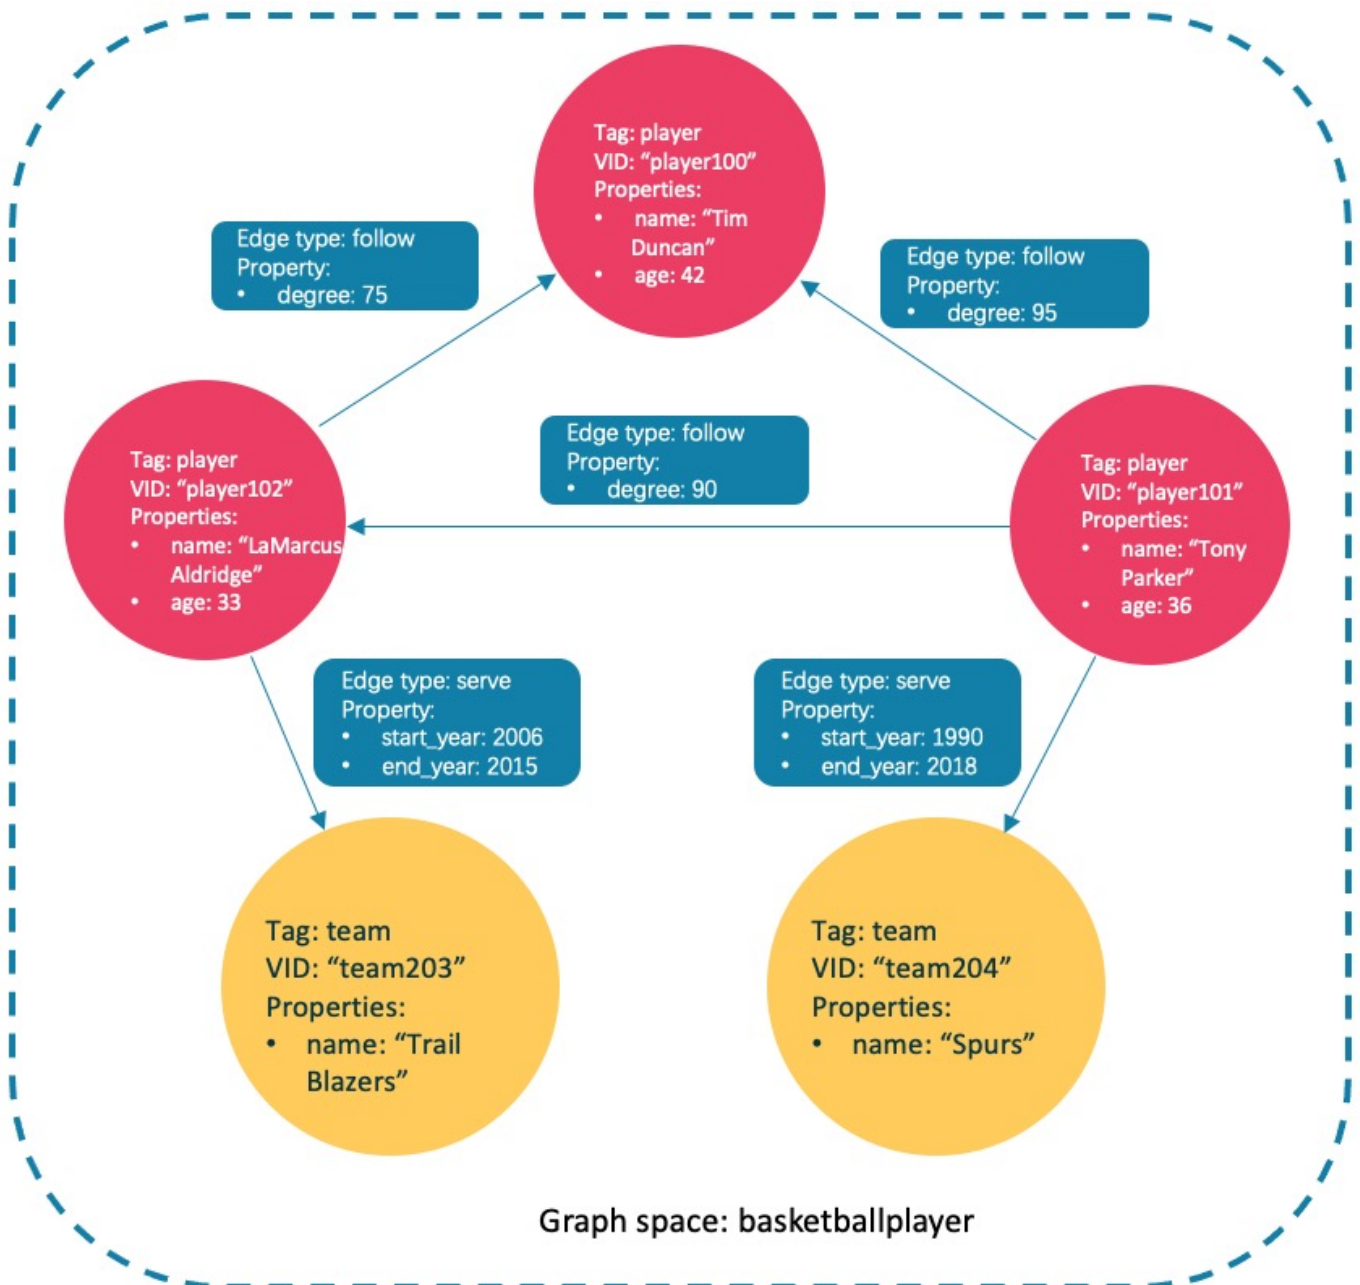

Insert the test data:

```
nebula> CREATE SPACE IF NOT EXISTS subgraph(partition_num=15, replica_factor=1, vid_type=fixed_string(30));
nebula> USE subgraph;
nebula> CREATE TAG IF NOT EXISTS player(name string, age int);
nebula> CREATE TAG IF NOT EXISTS team(name string);
nebula> CREATE EDGE IF NOT EXISTS follow(degree int);
nebula> CREATE EDGE IF NOT EXISTS serve(start_year int, end_year int);
nebula> INSERT VERTEX player(name, age) VALUES "player100":("Tim Duncan", 42);
nebula> INSERT VERTEX player(name, age) VALUES "player101":("Tony Parker", 36);
nebula> INSERT VERTEX player(name, age) VALUES "player102":("LaMarcus Aldridge", 33);
nebula> INSERT VERTEX team(name) VALUES "team203":("Trail Blazers"), "team204":("Spurs");
nebula> INSERT EDGE follow(degree) VALUES "player101" -> "player100":(95);
nebula> INSERT EDGE follow(degree) VALUES "player101" -> "player102":(90);
```

```
nebula> INSERT EDGE follow(degree) VALUES "player102" -> "player100":(75);
nebula> INSERT EDGE serve(start_year, end_year) VALUES "player101" -> "team204":(1999, 2018), "player102" -> "team203":(2006, 2015);
```


- This example goes one step from the vertex `player101` over all edge types and gets the subgraph.

```

nebula> GET SUBGRAPH 1 STEPS FROM "player101" YIELD VERTICES AS nodes, EDGES AS relationships;
+-----+
+-----+
| nodes                                     |
relationships                             |
+-----+
+-----+
| [{"player101" :player{}}]               | [{"serve "player101"->"team204" @0 {}}, [{"follow "player101"->"player100" @0 {}},
[{"follow "player101"->"player102" @0 {}}] |
| [{"team204" :team{}}], ("player100" :player{}), ("player102" :player{})] | [{"follow "player102"->"player100" @0
{}]}
|
+-----+
+-----+

```

The returned subgraph is as follows.

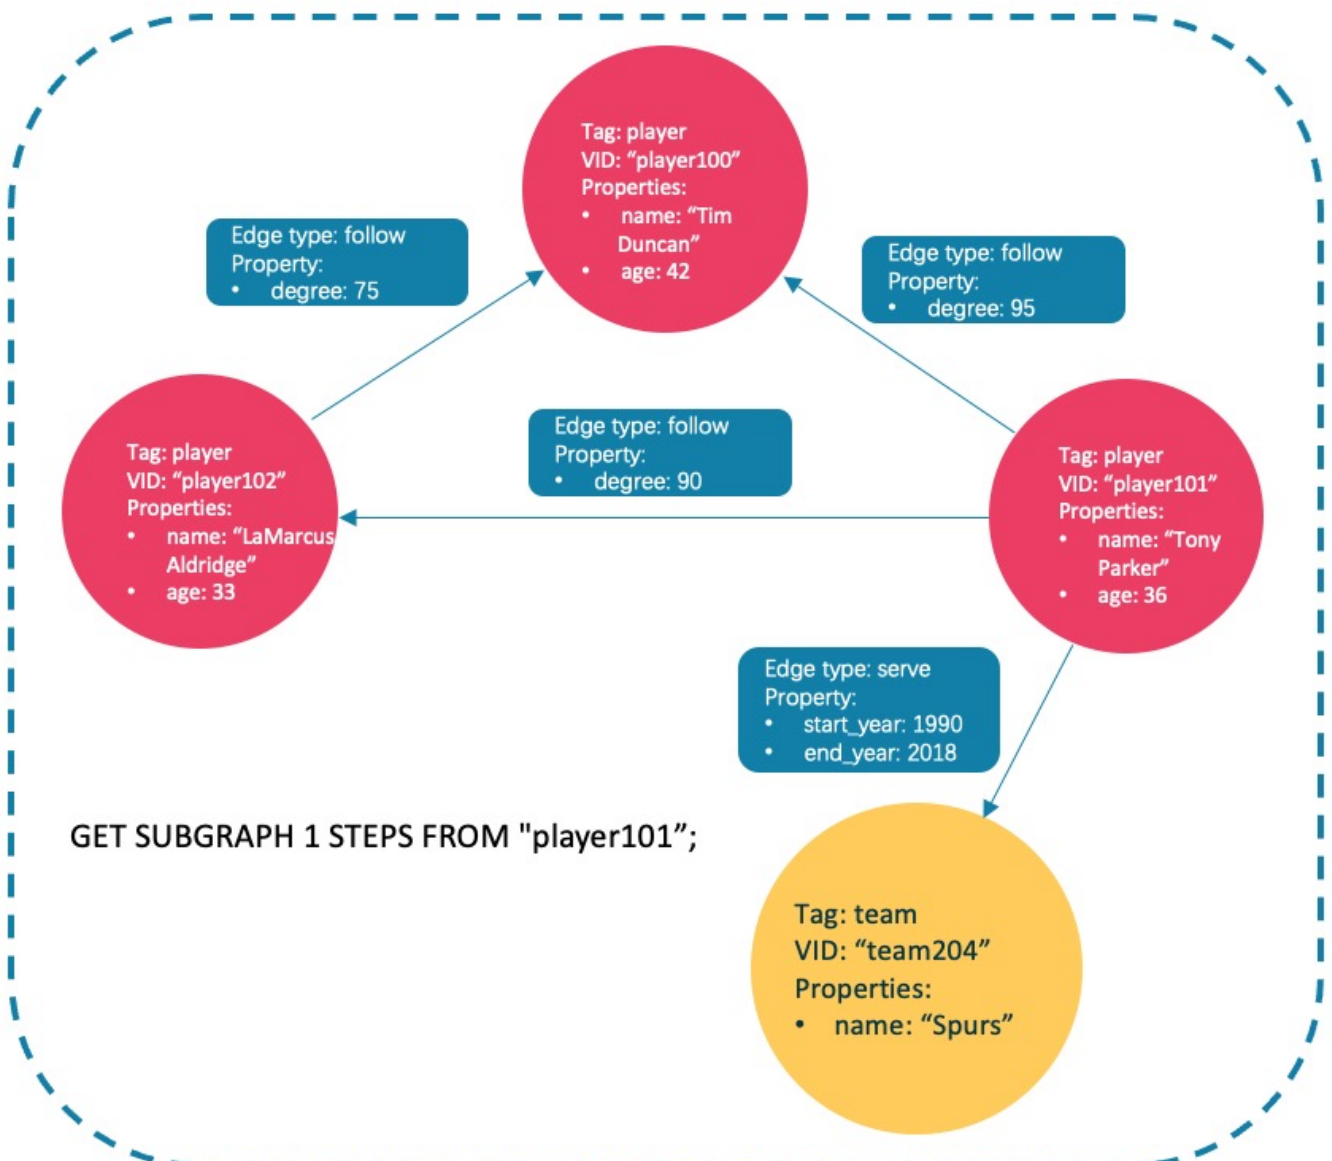

- This example goes one step from the vertex `player101` over incoming `follow` edges and gets the subgraph.


```
nebula> GET SUBGRAPH 1 STEPS FROM "player101" IN follow YIELD VERTICES AS nodes, EDGES AS relationships;
+-----+-----+
| nodes | relationships |
+-----+-----+
| [{"player101" :player{}}] | [] |
| [] | [] |
+-----+-----+
```

There is no incoming `follow` edge to `player101`, so only the vertex `player101` is returned.

- This example goes one step from the vertex `player101` over outgoing `serve` edges, gets the subgraph, and shows the property of the edge.

```
nebula> GET SUBGRAPH WITH PROP 1 STEPS FROM "player101" OUT serve YIELD VERTICES AS nodes, EDGES AS relationships;
+-----+-----+-----+
| nodes | relationships |
+-----+-----+-----+
| [{"player101" :player{age: 36, name: "Tony Parker"}}] | [[:serve "player101"->"team204" @0 {end_year: 2018, start_year: 1999}]] |
| [{"team204" :team{name: "Spurs"}}] | [] |
+-----+-----+-----+
```


The returned subgraph is as follows.

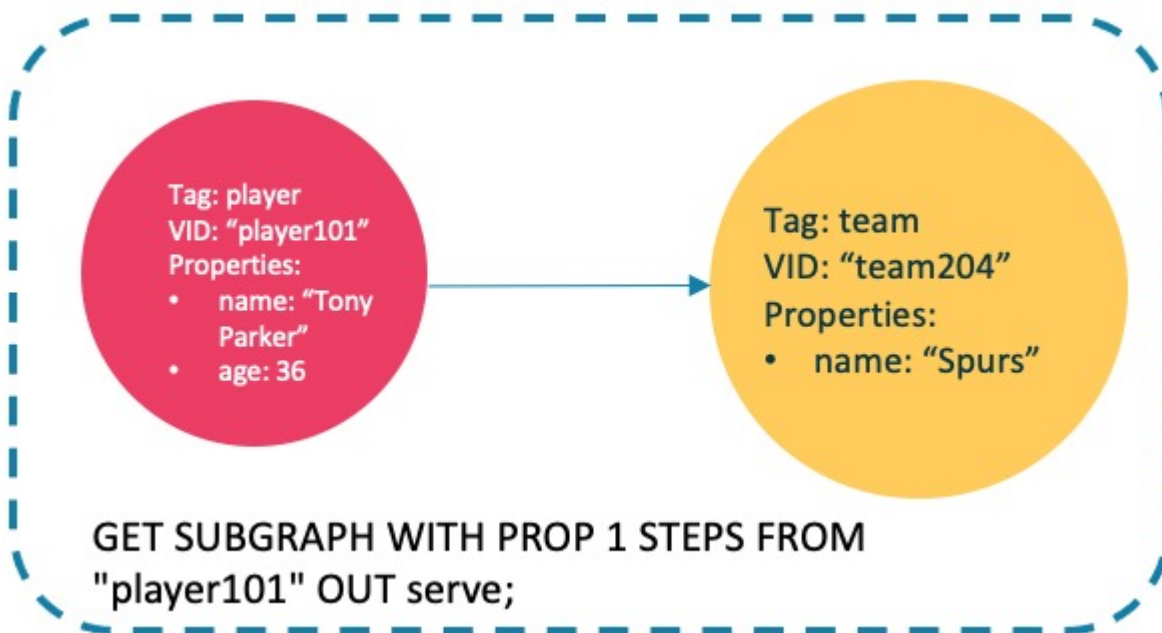

FAQ

WHY IS THE NUMBER OF HOPS IN THE RETURNED RESULT GREATER THAN `STEP_COUNT` ?

To show the completeness of the subgraph, an additional hop is made on all vertices that meet the conditions. The following graph is used as the sample.

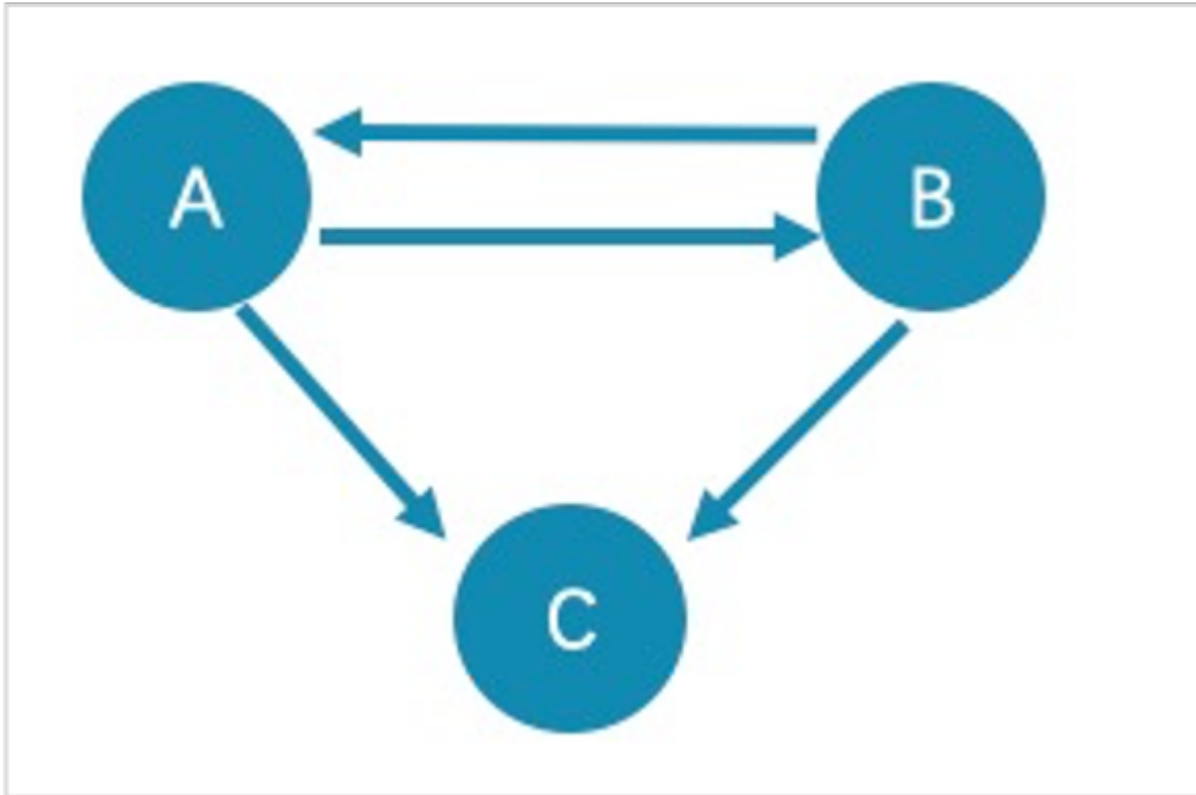

- The returned paths of `GET SUBGRAPH 1 STEPS FROM "A"`; are `A->B`, `B->A`, and `A->C`. To show the completeness of the subgraph, an additional hop is made on all vertices that meet the conditions, namely `B->C`.
- The returned path of `GET SUBGRAPH 1 STEPS FROM "A" IN follow;` is `B->A`. To show the completeness of the subgraph, an additional hop is made on all vertices that meet the conditions, namely `A->B`.

If you only query paths or vertices that meet the conditions, we suggest you use `MATCH` or `GO`. The example is as follows.

```

nebulu> MATCH p= (v:player) -- (v2) WHERE id(v)="A" RETURN p;
nebulu> GO 1 STEPS FROM "A" OVER follow YIELD id(vertex);

```

WHY IS THE NUMBER OF HOPS IN THE RETURNED RESULT LOWER THAN `STEP_COUNT` ?

The query stops when there is not enough subgraph data and will not return the null value.

```

nebulu> GET SUBGRAPH 100 STEPS FROM "player101" OUT follow YIELD VERTICES AS nodes, EDGES AS relationships;
+-----+-----+
| nodes                                     | relationships                                     |
+-----+-----+
| [{"player101" :player{}}]               | [[:follow "player101"->"player100" @0 {}], [[:follow "player101"->"player102" @0 {}]] |
| [{"player100" :player{}}, {"player102" :player{}}] | [[:follow "player102"->"player100" @0 {}]] |
+-----+-----+

```

Last update: January 14, 2022

4.15.2 FIND PATH

The `FIND PATH` statement finds the paths between the selected source vertices and destination vertices.

Syntax

```
FIND { SHORTEST | ALL | NOLOOP } PATH [WITH PROP] FROM <vertex_id_list> TO <vertex_id_list>
OVER <edge_type_list> [REVERSELY | BIDIRECT]
[<WHERE clause>] [UPTO <N> STEPS]
YIELD path as <alias>
[| ORDER BY $-.path] [| LIMIT <M>];

<vertex_id_list> ::=
[vertex_id [, vertex_id] ...]
```

- `SHORTEST` finds the shortest path.
- `ALL` finds all the paths.
- `NOLoop` finds the paths without circles.
- `WITH PROP` shows properties of vertices and edges. If not specified, properties will be hidden.
- `<vertex_id_list>` is a list of vertex IDs separated with commas (.). It supports `$-` and `$var`.
- `<edge_type_list>` is a list of edge types separated with commas (.). `*` is all edge types.
- `REVERSELY | BIDIRECT` specifies the direction. `REVERSELY` is reverse graph traversal while `BIDIRECT` is bidirectional graph traversal.
- `<WHERE clause>` filters properties of edges.
- `<N>` is the maximum hop number of the path. The default value is `5`.
- `<M>` specifies the maximum number of rows to return.

Note

The path type of `FIND PATH` is `trail`. Only vertices can be repeatedly visited in graph traversal. For more information, see [Path](#).

Limitations

- When a list of source and/or destination vertex IDs are specified, the paths between any source vertices and the destination vertices will be returned.
- There can be cycles when searching all paths.
- `FIND PATH` only supports filtering properties of edges with `WHERE` clauses. Filtering properties of vertices and functions are not supported for now.
- `FIND PATH` is a single-thread procedure, so it uses much memory.

Examples

A returned path is like `(<vertex_id>)-[:<edge_type_name>@<rank>]-(<vertex_id>)`.

```
nebula> FIND SHORTEST PATH FROM "player102" TO "team204" OVER * YIELD path AS p;
+-----+
| p                |
+-----+
| <("player102")-[:serve@0 {}]->("team204")> |
+-----+
```

```
nebula> FIND SHORTEST PATH WITH PROP FROM "team204" TO "player100" OVER * REVERSELY YIELD path AS p;
+-----+
| p                |
+-----+
```

```
| <("team204" :team{name: "Spurs"})<[:serve@0 {end_year: 2016, start_year: 1997}]-( "player100" :player{age: 42, name: "Tim Duncan"})> |
+-----+
```

```
nebula> FIND ALL PATH FROM "player100" TO "team204" OVER * WHERE follow.degree is EMPTY or follow.degree >=0 YIELD path AS p;
```

```
+-----+
| p |
+-----+
| <("player100")-[:serve@0 {}]->("team204")> |
| <("player100")-[:follow@0 {}]->("player125")-[:serve@0 {}]->("team204")> |
| <("player100")-[:follow@0 {}]->("player101")-[:serve@0 {}]->("team204")> |
| ... |
+-----+
```

```
nebula> FIND NOLOOP PATH FROM "player100" TO "team204" OVER * YIELD path AS p;
```

```
+-----+
| p |
+-----+
| <("player100")-[:serve@0 {}]->("team204")> |
| <("player100")-[:follow@0 {}]->("player125")-[:serve@0 {}]->("team204")> |
| <("player100")-[:follow@0 {}]->("player101")-[:serve@0 {}]->("team204")> |
| <("player100")-[:follow@0 {}]->("player101")-[:follow@0 {}]->("player125")-[:serve@0 {}]->("team204")> |
| <("player100")-[:follow@0 {}]->("player101")-[:follow@0 {}]->("player102")-[:serve@0 {}]->("team204")> |
+-----+
```

FAQ

DOES IT SUPPORT THE WHERE CLAUSE TO ACHIEVE CONDITIONAL FILTERING DURING GRAPH TRAVERSAL?

`FIND PATH` only supports filtering properties of edges with `WHERE` clauses, such as `FIND ALL PATH FROM "player100" TO "team204" OVER * WHERE follow.degree is EMPTY or follow.degree >=0;`.

Filtering properties of vertices is not supported for now.

Last update: January 17, 2022

4.16 Query tuning statements

4.16.1 EXPLAIN and PROFILE

`EXPLAIN` helps output the execution plan of an nGQL statement without executing the statement.

`PROFILE` executes the statement, then outputs the execution plan as well as the execution profile. You can optimize the queries for better performance according to the execution plan and profile.

Execution Plan

The execution plan is determined by the execution planner in the Nebula Graph query engine.

The execution planner processes the parsed nGQL statements into `actions`. An `action` is the smallest unit that can be executed. A typical `action` fetches all neighbors of a given vertex, gets the properties of an edge, and filters vertices or edges based on the given conditions. Each `action` is assigned to an `operator` that performs the action.

For example, a `SHOW TAGS` statement is processed into two `actions` and assigned to a `Start operator` and a `ShowTags operator`, while a more complex `GO` statement may be processed into more than 10 `actions` and assigned to 10 operators.

Syntax

- `EXPLAIN`

```
EXPLAIN [format="row" | "dot"] <your_nGQL_statement>;
```

- `PROFILE`

```
PROFILE [format="row" | "dot"] <your_nGQL_statement>;
```

Output formats

The output of an `EXPLAIN` or a `PROFILE` statement has two formats, the default `row` format and the `dot` format. You can use the `format` option to modify the output format. Omitting the `format` option indicates using the default `row` format.

The row format

The `row` format outputs the return message in a table as follows.

- EXPLAIN

```
nebula> EXPLAIN format="row" SHOW TAGS;
Execution succeeded (time spent 327/892 us)
```

Execution Plan

id	name	dependencies	profiling data	operator info
1	ShowTags	0		outputVar: [{"colNames": [], "name": "__ShowTags_1", "type": "DATASET"}] inputVar:
0	Start			outputVar: [{"colNames": [], "name": "__Start_0", "type": "DATASET"}]

- PROFILE

```
nebula> PROFILE format="row" SHOW TAGS;
+-----+
| Name |
+-----+
| player |
+-----+
| team |
+-----+
Got 2 rows (time spent 2038/2728 us)
```

Execution Plan

id	name	dependencies	profiling data	operator info
1	ShowTags	0	ver: 0, rows: 1, execTime: 42us, totalTime: 1177us	outputVar: [{"colNames": [], "name": "__ShowTags_1", "type": "DATASET"}] inputVar:
0	Start		ver: 0, rows: 0, execTime: 1us, totalTime: 57us	outputVar: [{"colNames": [], "name": "__Start_0", "type": "DATASET"}]

The descriptions are as follows.

Parameter	Description
id	The ID of the operator.
name	The name of the operator.
dependencies	The ID of the operator that the current operator depends on.
profiling data	The content of the execution profile. <code>ver</code> is the version of the operator. <code>rows</code> shows the number of rows to be output by the operator. <code>execTime</code> shows the execution time of action. <code>totalTime</code> is the sum of the execution time, the system scheduling time, and the queueing time.
operator info	The detailed information of the operator.

The dot format

You can use the `format="dot"` option to output the return message in the `dot` language, and then use Graphviz to generate a graph of the plan.

Note

Graphviz is open source graph visualization software. Graphviz provides an online tool for previewing DOT language files and exporting them to other formats such as SVG or JSON. For more information, see [Graphviz Online](#).

```
nebula> EXPLAIN format="dot" SHOW TAGS;
Execution succeeded (time spent 161/665 us)
Execution Plan
```


```
plan
-----
digraph exec_plan {
```

```

rankdir=LR;
"ShowTags_0"[label="ShowTags_0|outputVar: \["colNames":[],\"name\":\"__ShowTags_0\", \"type\":\"DATASET\"\\}\\1|inputVar: \1\", shape=Mrecord];
"Start_2"->"ShowTags_0";
"Start_2"[label="Start_2|outputVar: \["colNames":[],\"name\":\"__Start_2\", \"type\":\"DATASET\"\\}\\1|inputVar: \1\", shape=Mrecord];
}

```

The Graphviz graph transformed from the above DOT statement is as follows.



Last update: January 14, 2022

4.17 Operation and maintenance statements

4.17.1 BALANCE syntax

The `BALANCE` statements support the load balancing operations of the Nebula Graph Storage services. For more information about storage load balancing and examples for using the `BALANCE` statements, see [Storage load balance](#).

Legacy version compatibility

The `BALANCE DATA` commands are not supported.

The `BALANCE` statements are listed as follows.

Syntax	Description
<code>BALANCE LEADER</code>	Starts a job to balance the distribution of storage leaders in the current graph space. It returns the job ID.

For details about how to view, stop, and restart a job, see [Job manager and the JOB statements](#).

Last update: January 28, 2022

4.17.2 Job manager and the JOB statements

The long-term tasks run by the Storage Service are called jobs, such as `COMPACT`, `FLUSH`, and `STATS`. These jobs can be time-consuming if the data amount in the graph space is large. The job manager helps you run, show, stop, and recover jobs.

Note

All job management commands can be executed only after selecting a graph space.

SUBMIT JOB COMPACT

The `SUBMIT JOB COMPACT` statement triggers the long-term RocksDB `compact` operation in the current graph space.

For more information about `compact` configuration, see [Storage Service configuration](#).

For example:

```
nebula> SUBMIT JOB COMPACT;
+-----+
| New Job Id |
+-----+
| 40         |
+-----+
```

SUBMIT JOB FLUSH

The `SUBMIT JOB FLUSH` statement writes the RocksDB memfile in the memory to the hard disk in the current graph space.

For example:

```
nebula> SUBMIT JOB FLUSH;
+-----+
| New Job Id |
+-----+
| 96         |
+-----+
```

SUBMIT JOB STATS

The `SUBMIT JOB STATS` statement starts a job that makes the statistics of the current graph space. Once this job succeeds, you can use the `SHOW STATS` statement to list the statistics. For more information, see [SHOW STATS](#).

Note

If the data stored in the graph space changes, in order to get the latest statistics, you have to run `SUBMIT JOB STATS` again.

For example:

```
nebula> SUBMIT JOB STATS;
+-----+
| New Job Id |
+-----+
| 34         |
+-----+
```

SHOW JOB

The Meta Service parses a `SUBMIT JOB` request into multiple tasks and assigns them to the nebula-storaged processes. The `SHOW JOB <job_id>` statement shows the information about a specific job and all its tasks in the current graph space.

`job_id` is returned when you run the `SUBMIT JOB` statement.

For example:


```
rebutla> SHOW JOB 34;
```

Job Id(TaskId)	Command(Dest)	Status	Start Time	Stop Time
34	"STATS"	"FINISHED"	2021-11-01T03:32:27.000000	2021-11-01T03:32:27.000000
0	"192.168.8.111"	"FINISHED"	2021-11-01T03:32:27.000000	2021-11-01T03:32:41.000000

The descriptions are as follows.

Parameter	Description	Job Id(TaskId)	The first row shows the job ID and the other rows show the task IDs.
Command(Dest)	The first row shows the command executed and the other rows show on which stored processes the task is running.	Status	Shows the status of the job or task. For more information, see Job status .
Start Time	Shows a timestamp indicating the time when the job or task enters the <code>RUNNING</code> phase.	Stop Time	Shows a timestamp indicating the time when the job or task gets <code>FINISHED</code> , <code>FAILED</code> , or <code>STOPPED</code> .

JOB STATUS

The descriptions are as follows.

Status	Description
PENDING	The job or task is waiting in a queue. The <code>Start Time</code> is empty in this phase.
RUNNING	The job or task is running. The <code>Start Time</code> shows the beginning time of this phase.
FINISHED	The job or task is successfully finished. The <code>Stop Time</code> shows the time when the job or task enters this phase.
FAILED	The job or task has failed. The <code>Stop Time</code> shows the time when the job or task enters this phase.
STOPPED	The job or task is stopped without running. The <code>Stop Time</code> shows the time when the job or task enters this phase.
REMOVED	The job or task is removed.

The description of switching the status is described as follows.



SHOW JOBS

The `SHOW JOBS` statement lists all the unexpired jobs in the current graph space.

The default job expiration interval is one week. You can change it by modifying the `job_expired_secs` parameter of the Meta Service. For how to modify `job_expired_secs`, see [Meta Service configuration](#).

For example:

```
nebula> SHOW JOBS;
```

Job Id	Command	Status	Start Time	Stop Time
34	"STATS"	"FINISHED"	2021-11-01T03:32:27.000000	2021-11-01T03:32:27.000000
33	"FLUSH"	"FINISHED"	2021-11-01T03:32:15.000000	2021-11-01T03:32:15.000000
32	"COMPACT"	"FINISHED"	2021-11-01T03:32:06.000000	2021-11-01T03:32:06.000000
31	"REBUILD_TAG_INDEX"	"FINISHED"	2021-10-29T05:39:16.000000	2021-10-29T05:39:17.000000
10	"COMPACT"	"FINISHED"	2021-10-26T02:27:05.000000	2021-10-26T02:27:05.000000

STOP JOB

The `STOP JOB <job_id>` statement stops jobs that are not finished in the current graph space.

For example:

```
nebula> STOP JOB 22;
+-----+
| Result |
+-----+
| "Job stopped" |
+-----+
```

RECOVER JOB

The `RECOVER JOB [<job_id>]` statement re-executes the jobs that status is `QUEUE`, `FAILED` or `STOPPED` in the current graph space and returns the number of recovered jobs. If `<job_id>` is not specified, re-execution is performed from the earliest job and the number of jobs that have been recovered is returned.

For example:

```
nebula> RECOVER JOB;
+-----+
| Recovered job num |
+-----+
| 5 job recovered   |
+-----+
```

FAQ

HOW TO TROUBLESHOOT JOB PROBLEMS?

The `SUBMIT JOB` operations use the HTTP port. Please check if the HTTP ports on the machines where the Storage Service is running are working well. You can use the following command to debug.

```
curl "http://{storaged-ip}:19779/admin?space={space_name}&op=compact"
```

Last update: January 20, 2022

4.17.3 Kill queries

`KILL QUERY` can terminate the query being executed, and is often used to terminate slow queries.

Syntax

```
KILL QUERY (session=<session_id>, plan=<plan_id>);
```

- `session_id`: The ID of the session.
- `plan_id`: The ID of the execution plan.

The ID of the session and the ID of the execution plan can uniquely determine a query. Both can be obtained through the `SHOW QUERIES` statement.

Examples

This example executes `KILL QUERY` in one session to terminate the query in another session.

```
nebula> KILL QUERY(SESSION=1625553545984255, PLAN=163);
```

The query will be terminated and the following information will be returned.

```
[ERROR (-1005)]: Execution had been killed
```

Last update: January 14, 2022

5. Deployment and installation

5.1 Prepare resources for compiling, installing, and running Nebula Graph

This topic describes the requirements and suggestions for compiling and installing Nebula Graph, as well as how to estimate the resource you need to reserve for running a Nebula Graph cluster.

5.1.1 Requirements for compiling the Nebula Graph source code

Hardware requirements for compiling Nebula Graph

Item	Requirement
CPU architecture	x86_64
Memory	4 GB
Disk	10 GB, SSD

Supported operating systems for compiling Nebula Graph

For now, we can only compile Nebula Graph in the Linux system. We recommend that you use any Linux system with kernel version [4.15](#) or above.

Note

To install Nebula Graph on Linux systems with kernel version lower than required, use [RPM/DEB packages](#) or [TAR files](#).

Software requirements for compiling Nebula Graph

You must have the correct version of the software listed below to compile Nebula Graph. If they are not as required or you are not sure, follow the steps in [Prepare software for compiling Nebula Graph](#) to get them ready.

Software	Version	Note
glibc	2.17 or above	You can run <code>ldd --version</code> to check the glibc version.
make	Any stable version	-
m4	Any stable version	-
git	Any stable version	-
wget	Any stable version	-
unzip	Any stable version	-
xz	Any stable version	-
readline-devel	Any stable version	-
ncurses-devel	Any stable version	-
zlib-devel	Any stable version	-
g++	8.5.0 or above	You can run <code>gcc -v</code> to check the gcc version.
cmake	3.14.0 or above	You can run <code>cmake --version</code> to check the cmake version.
curl	Any stable version	-
redhat-lsb-core	Any stable version	-
libstdc++-static	Any stable version	Only needed in CentOS 8+, RedHat 8+, and Fedora systems.
libasan	Any stable version	Only needed in CentOS 8+, RedHat 8+, and Fedora systems.
bzip2	Any stable version	-

Other third-party software will be automatically downloaded and installed to the `build` directory at the configure (cmake) stage.

Prepare software for compiling Nebula Graph

If part of the dependencies are missing or the versions does not meet the requirements, manually install them with the following steps. You can skip unnecessary dependencies or steps according to your needs.

1. Install dependencies.

- For CentOS, RedHat, and Fedora users, run the following commands.

```
$ yum update
$ yum install -y make \
    m4 \
    git \
    wget \
    unzip \
    xz \
    readline-devel \
    ncurses-devel \
    zlib-devel \
    gcc \
    gcc-c++ \
    cmake \
    curl \
    redhat-lsb-core \
    bzip2
// For CentOS 8+, RedHat 8+, and Fedora, install libstdc++-static and libasan as well
$ yum install -y libstdc++-static libasan
```

- For Debian and Ubuntu users, run the following commands.

```
$ apt-get update
$ apt-get install -y make \
    m4 \
    git \
    wget \
    unzip \
    xz-utils \
    curl \
    lsb-core \
    build-essential \
    libreadline-dev \
    ncurses-dev \
    cmake \
    gettext
```

2. Check if the GCC and cmake on your host are in the right version. See [Software requirements for compiling Nebula Graph](#) for the required versions.

```
$ g++ --version
$ cmake --version
```

If your GCC and CMake are in the right versions, then you are all set and you can ignore the subsequent steps. If they are not, select and perform the needed steps as follows.

3. If the CMake version is incorrect, visit the CMake official website to install the required version.

4. If the G++ version is incorrect, visit the G++ official website or follow the instructions below to to install the required version.

- For CentOS users, run:

```
yum install centos-release-scl
yum install devtoolset-11
scl enable devtoolset-11 'bash'
```

- For Ubuntu users, run:

```
add-apt-repository ppa:ubuntu-toolchain-r/test
apt install gcc-11 g++-11
```

5.1.2 Requirements and suggestions for installing Nebula Graph in test environments

Hardware requirements for test environments

Item	Requirement
CPU architecture	x86_64
Number of CPU core	4
Memory	8 GB
Disk	100 GB, SSD

Supported operating systems for test environments

For now, we can only install Nebula Graph in the Linux system. To install Nebula Graph in a test environment, we recommend that you use any Linux system with kernel version 3.9 or above.

Suggested service architecture for test environments

Process	Suggested number
metad (the metadata service process)	1
stored (the storage service process)	1 or more
graphd (the query engine service process)	1 or more

For example, for a single-machine test environment, you can deploy 1 metad, 1 stored, and 1 graphd processes in the machine.

For a more common test environment, such as a cluster of 3 machines (named as A, B, and C), you can deploy Nebula Graph as follows:

Machine name	Number of metad	Number of stored	Number of graphd
A	1	1	1
B	None	1	1
C	None	1	1

5.1.3 Requirements and suggestions for installing Nebula Graph in production environments

Hardware requirements for production environments

Item	Requirement
CPU architecture	x86_64
Number of CPU core	48
Memory	96 GB
Disk	2 * 900 GB, NVMe SSD

Supported operating systems for production environments

For now, we can only install Nebula Graph in the Linux system. To install Nebula Graph in a production environment, we recommend that you use any Linux system with kernel version 3.9 or above.

Users can adjust some of the kernel parameters to better accommodate the need for running Nebula Graph. For more information, see [kernel configuration](#).

Suggested service architecture for production environments**Danger**

DO NOT deploy a cluster across IDCs.

Process	Suggested number
metad (the metadata service process)	3
stored (the storage service process)	3 or more
graphd (the query engine service process)	3 or more

Each metad process automatically creates and maintains a replica of the metadata. Usually, you need to deploy three metad processes and only three.

The number of stored processes does not affect the number of graph space replicas.

Users can deploy multiple processes on a single machine. For example, on a cluster of 5 machines (named as A, B, C, D, and E), you can deploy Nebula Graph as follows:

Machine name	Number of metad	Number of stored	Number of graphd
A	1	1	1
B	1	1	1
C	1	1	1
D	None	1	1
E	None	1	1

5.1.4 Capacity requirements for running a Nebula Graph cluster

Users can estimate the memory, disk space, and partition number needed for a Nebula Graph cluster of 3 replicas as follows.

Resource	Unit	How to estimate	Description
Disk space for a cluster	Bytes	$\text{the_sum_of_edge_number_and_vertex_number} * \text{average_bytes_of_properties} * 6 * 120\%$	-
Memory for a cluster	Bytes	$[\text{the_sum_of_edge_number_and_vertex_number} * 16 + \text{the_number_of_RocksDB_instances} * (\text{write_buffer_size} * \text{max_write_buffer_number} + \text{rocksdb_block_cache})] * 120\%$	<code>write_buffer_size</code> and <code>max_write_buffer_number</code> are RocksDB parameters. For more information, see MemTable . For details about <code>rocksdb_block_cache</code> , see Memory usage in RocksDB .
Number of partitions for a graph space	-	$\text{the_number_of_disks_in_the_cluster} * \text{disk_partition_num_multiplier}$	<code>disk_partition_num_multiplier</code> is an integer between 2 and 10 (both including). Its value depends on the disk performance. Use 2 for HDD.

- Question 1: Why do we multiply the disk space and memory by 120%?

Answer: The extra 20% is for buffer.

- Question 2: How to get the number of RocksDB instances?

Answer: Each directory in the `--data_path` item in the `etc/nebula-storaged.conf` file corresponds to a RocksDB instance. Count the number of directories to get the RocksDB instance number.

Note

Users can decrease the memory size occupied by the bloom filter by adding `--enable_partitioned_index_filter=true` in `etc/nebula-storaged.conf`. But it may decrease the read performance in some random-seek cases.

5.1.5 FAQ

About storage devices

Nebula Graph is designed and implemented for NVMe SSD. All default parameters are optimized for the SSD devices and require extremely high IOPS and low latency.

- Due to the poor IOPS capability and long random seek latency, HDD is not recommended. Users may encounter many problems when using HDD.
- Do not use remote storage devices, such as NAS or SAN. Do not connect an external virtual hard disk based on HDFS or Ceph.
- Do not use RAID.
- Use local SSD devices.

About CPU architecture

Enterpriseonly

Nebula Graph 3.0.0 does not support running or compiling directly on the ARM architecture (including Apple Mac M1 or Huawei Kunpeng).

Contact inquiry@vesoft.com for business supports.

Last update: February 8, 2022

5.2 Compile and install Nebula Graph

5.2.1 Install Nebula Graph by compiling the source code

Installing Nebula Graph from the source code allows you to customize the compiling and installation settings and test the latest features.

Prerequisites

- Users have to prepare correct resources described in [Prepare resources for compiling, installing, and running Nebula Graph](#).
- The host to be installed with Nebula Graph has access to the Internet.

Installation steps

Note

Starting with the Nebula Graph 3.0.0 release, the code repositories for Nebula-Graph, Nebula-Storage, and Nebula-Common have been merged into the Nebula code repository, so the compilation steps are different from those in previous releases.

1. Use Git to clone the source code of Nebula Graph to the host.

- [Recommended] To install Nebula Graph 3.0.0, run the following command.

```
$ git clone --branch v3.0.0 https://github.com/vesoft-inc/nebula.git
```

- To install the latest developing release, run the following command to clone the source code from the master branch.

```
$ git clone https://github.com/vesoft-inc/nebula.git
```

2. Make the `nebula` directory the current working directory.

```
$ cd nebula
```

3. Create a `build` directory and make it the current working directory.

```
$ mkdir build && cd build
```

4. Generate Makefile with CMake.

Note

The installation path is `/usr/local/nebula` by default. To customize it, add the `-DCMAKE_INSTALL_PREFIX=<installation_path>` CMake variable in the following command.

For more information about CMake variables, see [CMake variables](#).

```
$ cmake -DCMAKE_INSTALL_PREFIX=/usr/local/nebula -DENABLE_TESTING=OFF -DCMAKE_BUILD_TYPE=Release ..
```

5. Compile Nebula Graph.

Note

Check [Prepare resources for compiling, installing, and running Nebula Graph](#).

To speed up the compiling, use the `-j` option to set a concurrent number `N`. It should be $\min(\text{CPU core number}, \frac{\text{the_memory_size(GB)}}{2})$.

```
$ make -j{N} # E.g., make -j2
```

6. Install Nebula Graph.

```
$ sudo make install
```

7. The configuration files in the `etc/` directory (`/usr/local/nebula/etc` by default) are references. Users can create their own configuration files accordingly. If you want to use the scripts in the `script` directory to start, stop, restart, and kill the service, and check the service status, the configuration files have to be named as `nebula-graph.conf`, `nebula-metad.conf`, and `nebula-storaged.conf`.

Update the master branch

The source code of the master branch changes frequently. If the corresponding Nebula Graph release is installed, update it in the following steps.

1. In the `nebula` directory, run `git pull upstream master` to update the source code.
2. In the `nebula/build` directory, run `make -j{N}` and `make install` again.

Next to do

- (Enterprise Edition) [Deploy license](#)
- [Manage Nebula Graph services](#)

CMake variables

USAGE OF CMAKE VARIABLES

```
$ cmake -D<variable>=<value> ...
```

The following CMake variables can be used at the configure (cmake) stage to adjust the compiling settings.

CMAKE_INSTALL_PREFIX

`CMAKE_INSTALL_PREFIX` specifies the path where the service modules, scripts, configuration files are installed. The default path is `/usr/local/nebula`.

ENABLE_WERROR

`ENABLE_WERROR` is `ON` by default and it makes all warnings into errors. You can set it to `OFF` if needed.

ENABLE_TESTING

`ENABLE_TESTING` is `ON` by default and unit tests are built with the Nebula Graph services. If you just need the service modules, set it to `OFF`.

ENABLE_ASAN

`ENABLE_ASAN` is `OFF` by default and the building of ASan (AddressSanitizer), a memory error detector, is disabled. To enable it, set `ENABLE_ASAN` to `ON`. This variable is intended for Nebula Graph developers.

CMAKE_BUILD_TYPE

Nebula Graph supports the following building types of `MAKE_BUILD_TYPE`:

- `Debug`

The default value of `CMAKE_BUILD_TYPE`. It indicates building Nebula Graph with the debug info but not the optimization options.

- `Release`

It indicates building Nebula Graph with the optimization options but not the debug info.

- `RelWithDebInfo`

It indicates building Nebula Graph with the optimization options and the debug info.

- `MinSizeRel`

It indicates building Nebula Graph with the optimization options for controlling the code size but not the debug info.

ENABLE_INCLUDE_WHAT_YOU_USE

`ENABLE_INCLUDE_WHAT_YOU_USE` is `OFF` by default. When set to `ON` and `include-what-you-use` is installed on the system, the system reports redundant headers contained in the project source code during makefile generation.

NEBULA_USE_LINKER

Specifies the program linker on the system. The available values are:

- `bfd`, the default value, indicates that `ld.bfd` is applied as the linker.
- `lld`, indicates that `ld.lld`, if installed on the system, is applied as the linker.
- `gold`, indicates that `ld.gold`, if installed on the system, is applied as the linker.

CMAKE_C_COMPILER/CMAKE_CXX_COMPILER

Usually, CMake locates and uses a C/C++ compiler installed in the host automatically. But if your compiler is not installed at the standard path, or if you want to use a different one, run the command as follows to specify the installation path of the target compiler:

```
$ cmake -DCMAKE_C_COMPILER=<path_to_gcc/bin/gcc> -DCMAKE_CXX_COMPILER=<path_to_gcc/bin/g++> ..
$ cmake -DCMAKE_C_COMPILER=<path_to_clang/bin/clang> -DCMAKE_CXX_COMPILER=<path_to_clang/bin/clang++> ..
```

ENABLE_CCACHE

`ENABLE_CCACHE` is `ON` by default and Ccache (compiler cache) is used to speed up the compiling of Nebula Graph.

To disable `ccache`, setting `ENABLE_CCACHE` to `OFF` is not enough. On some platforms, the `ccache` installation hooks up or precedes the compiler. In such a case, you have to set an environment variable `export CCACHE_DISABLE=true` or add a line `disable=true` in `~/ccache/ccache.conf` as well. For more information, see the [ccache official documentation](#).

NEBULA_THIRDPARTY_ROOT

`NEBULA_THIRDPARTY_ROOT` specifies the path where the third party software is installed. By default it is `/opt/vesoft/third-party`.

Examine problems

If the compiling fails, we suggest you:

1. Check whether the operating system release meets the requirements and whether the memory and hard disk space are sufficient.
2. Check whether the `third-party` is installed correctly.
3. Use `make -j1` to reduce the compiling concurrency.

Last update: January 18, 2022

5.2.2 Install Nebula Graph with RPM or DEB package

RPM and DEB are common package formats on Linux systems. This topic shows how to quickly install Nebula Graph with the RPM or DEB package.

Prerequisites

Prepare the right [resources](#).

Note

The console is not compiled or packaged with Nebula Graph server binaries. You can install [nebula-console](#) by yourself.

Enterpriseonly

For the Enterprise Edition, please send email to inquiry@vesoft.com.

Download the package from cloud service

- Download the released version.

URL:

```
//Centos 6
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.el6.x86_64.rpm

//Centos 7
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.el7.x86_64.rpm

//Centos 8
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.el8.x86_64.rpm

//Ubuntu 1604
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.ubuntu1604.amd64.deb

//Ubuntu 1804
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.ubuntu1804.amd64.deb

//Ubuntu 2004
https://oss-cdn.nebula-graph.io/package/<release_version>/nebula-graph-<release_version>.ubuntu2004.amd64.deb
```

For example, download the release package 3.0.0 for Centos 7.5 :

```
wget https://oss-cdn.nebula-graph.io/package/3.0.0/nebula-graph-3.0.0.el7.x86_64.rpm
wget https://oss-cdn.nebula-graph.io/package/3.0.0/nebula-graph-3.0.0.el7.x86_64.rpm.sha256sum.txt
```

Download the release package 3.0.0 for Ubuntu 1804 :

```
wget https://oss-cdn.nebula-graph.io/package/3.0.0/nebula-graph-3.0.0.ubuntu1804.amd64.deb
wget https://oss-cdn.nebula-graph.io/package/3.0.0/nebula-graph-3.0.0.ubuntu1804.amd64.deb.sha256sum.txt
```

- Download the nightly version.

Danger

- Nightly versions are usually used to test new features. Do not use it in a production environment.
- Nightly versions may not be built successfully every night. And the names may change from day to day.

URL:

```
//Centos 6
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.e16.x86_64.rpm

//Centos 7
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.e17.x86_64.rpm

//Centos 8
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.e18.x86_64.rpm

//Ubuntu 1604
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.ubuntu1604.amd64.deb

//Ubuntu 1804
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.ubuntu1804.amd64.deb

//Ubuntu 2004
https://oss-cdn.nebula-graph.io/package/nightly/<yyyy.mm.dd>/nebula-graph-<yyyy.mm.dd>-nightly.ubuntu2004.amd64.deb
```

For example, download the `Centos 7.5` package developed and built in `2021.11.28` :

```
wget https://oss-cdn.nebula-graph.io/package/nightly/2021.11.28/nebula-graph-2021.11.28-nightly.e17.x86_64.rpm
wget https://oss-cdn.nebula-graph.io/package/nightly/2021.11.28/nebula-graph-2021.11.28-nightly.e17.x86_64.rpm.sha256sum.txt
```

For example, download the `Ubuntu 1804` package developed and built in `2021.11.28` :

```
wget https://oss-cdn.nebula-graph.io/package/nightly/2021.11.28/nebula-graph-2021.11.28-nightly.ubuntu1804.amd64.deb
wget https://oss-cdn.nebula-graph.io/package/nightly/2021.11.28/nebula-graph-2021.11.28-nightly.ubuntu1804.amd64.deb.sha256sum.txt
```

Install Nebula Graph

- Use the following syntax to install with an RPM package.

```
$ sudo rpm -ivh --prefix=<installation_path> <package_name>
```

For example, to install an RPM package in the default path for the 3.0.0 version.

```
sudo rpm -ivh nebula-graph-3.0.0.e17.x86_64.rpm
```

- Use the following syntax to install with a DEB package.

```
$ sudo dpkg -i --install-dir=<installation_path> <package_name>
```

For example, to install a DEB package in the default path for the 3.0.0 version.

```
sudo dpkg -i nebula-graph-3.0.0.ubuntu1804.amd64.deb
```

Note

The default installation path is `/usr/local/nebula/`.

Next to do

- (Enterprise Edition)[Deploy license](#)
- [Start Nebula Graph](#)
- [Connect to Nebula Graph](#)

Last update: January 14, 2022

5.2.3 Install Nebula graph with the tar.gz file

You can install Nebula Graph by downloading the tar.gz file.

Note

Nebula Graph provides installing with the tar.gz file starting from version 2.6.0.

Installation steps

1. Download the Nebula Graph tar.gz file using the following address.

Before downloading, you need to replace `<release_version>` with the version you want to download.

```
//Centos 7
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.el7.x86_64.tar.gz
//Checksum
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.el7.x86_64.tar.gz.sha256sum.txt

//Centos 8
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.el8.x86_64.tar.gz
//Checksum
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.el8.x86_64.tar.gz.sha256sum.txt

//Ubuntu 1604
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.ubuntu1604.amd64.tar.gz
//Checksum
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.ubuntu1604.amd64.tar.gz.sha256sum.txt

//Ubuntu 1804
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.ubuntu1804.amd64.tar.gz
//Checksum
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.ubuntu1804.amd64.tar.gz.sha256sum.txt

//Ubuntu 2004
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.ubuntu2004.amd64.tar.gz
//Checksum
https://oss-cdn.nebula-graph.com.cn/package/<release_version>/nebula-graph-<release_version>.ubuntu2004.amd64.tar.gz.sha256sum.txt
```

For example, to download the Nebula Graph v3.0.0 tar.gz file for CentOS 7.5, run the following command:

```
wget https://oss-cdn.nebula-graph.com.cn/package/3.0.0/nebula-graph-3.0.0.el7.x86_64.tar.gz
```

2. Decompress the tar.gz file to the Nebula Graph installation directory.

```
tar -xvzf <tar.gz_file_name> -C <install_path>
```

- `tar.gz_file_name` specifies the name of the tar.gz file.
- `install_path` specifies the installation path.

For example:

```
tar -xvzf nebula-graph-2.6.0.el7.x86_64.tar.gz -C /home/joe/nebula/install
```

3. Modify the name of the configuration file.

Enter the decompressed directory, rename the files `nebula-graphd.conf.default`, `nebula-metad.conf.default`, and `nebula-storaged.conf.default` in the subdirectory `etc`, and delete `.default` to apply the default configuration of Nebula Graph. To modify the configuration, see [Configurations](#).

So far, you have installed Nebula Graph successfully.

Next to do

- (Enterprise Edition) [Deploy license](#)
- [Manage Nebula Graph services](#)

Last update: January 14, 2022

5.2.4 Deploy Nebula Graph with Docker Compose

Using Docker Compose can quickly deploy Nebula Graph services based on the prepared configuration file. It is only recommended to use this method when testing functions of Nebula Graph.

Prerequisites

- You have installed the following applications on your host.

Application	Recommended version	Official installation reference
Docker	Latest	Install Docker Engine
Docker Compose	Latest	Install Docker Compose
Git	Latest	Download Git

- If you are deploying Nebula Graph as a non-root user, grant the user with Docker-related privileges. For detailed instructions, see [Manage Docker as a non-root user](#).
- You have started the Docker service on your host.
- If you have already deployed another version of Nebula Graph with Docker Compose on your host, to avoid compatibility issues, you need to delete the `nebula-docker-compose/data` directory.

How to deploy and connect to Nebula Graph

- Clone the `3.0.0` branch of the `nebula-docker-compose` repository to your host with Git.

Danger

The `master` branch contains the untested code for the latest Nebula Graph development release. **DO NOT** use this release in a production environment.

```
$ git clone -b v3.0.0 https://github.com/vesoft-inc/nebula-docker-compose.git
```

- Go to the `nebula-docker-compose` directory.

```
$ cd nebula-docker-compose/
```

- Run the following command to start all the Nebula Graph services.

Note

Update the Nebula Graph images and Nebula Console images first if they are out of date.

```
[nebula-docker-compose]$ docker-compose up -d
Creating nebula-docker-compose_metad0_1 ... done
Creating nebula-docker-compose_metad2_1 ... done
Creating nebula-docker-compose_metad1_1 ... done
Creating nebula-docker-compose_graphd2_1 ... done
Creating nebula-docker-compose_graphd_1 ... done
Creating nebula-docker-compose_graphd1_1 ... done
Creating nebula-docker-compose_storaged0_1 ... done
Creating nebula-docker-compose_storaged2_1 ... done
Creating nebula-docker-compose_storaged1_1 ... done
```

Note

For more information of the preceding services, see [Nebula Graph architecture](#).

4. Connect to Nebula Graph.

- a. Run the following command to start a new docker container with the Nebula Console image, and connect the container to the network where Nebula Graph is deployed (nebula-docker-compose_nebula-net).

```
$ docker run --rm -ti --network nebula-docker-compose_nebula-net --entrypoint=/bin/sh vesoft/nebula-console:v2.6.0
```

Note

The local network may be different from the `nebula-docker-compose_nebula-net` in the above example. Use the following command.

```
$ docker network ls
NETWORK ID          NAME                DRIVER              SCOPE
a74c312b1d16        bridge              bridge              local
dbfa82505f0e        host                host                local
ed55ccf356ae        nebula-docker-compose_nebula-net  bridge              local
93ba48b4b288        none                null                local
```

b. Connect to Nebula Graph with Nebula Console.

```
docker> nebula-console -u <user_name> -p <password> --address=graphd --port=9669
```

Note

By default, the authentication is off, you can only log in with an existing username (the default is `root`) and any password. To turn it on, see [Enable authentication](#).

- c. Run the `SHOW HOSTS` statement to check the status of the `nebula-storaged` processes.

```
nebula> SHOW HOSTS;
+-----+-----+-----+-----+-----+-----+-----+
| Host      | Port | Status | Leader count | Leader distribution | Partition distribution | Version |
+-----+-----+-----+-----+-----+-----+-----+
| "storaged0" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
| "storaged1" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
| "storaged2" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
+-----+-----+-----+-----+-----+-----+-----+
```

5. Run `exit` twice to switch back to your terminal (shell). You can run Step 4 to log in to Nebula Graph again.

Check the Nebula Graph service status and ports

Run `docker-compose ps` to list all the services of Nebula Graph and their status and ports.

```
$ docker-compose ps
Name                                Command                                State                                Ports
-----
nebula-docker-compose_graphd1_1    ./bin/nebula-graphd --flag ...        Up (health: starting)              13000/tcp, 13002/tcp, 0.0.0.0:33295->19669/tcp, 0.0.0.0:33291->19670/tcp, 3699/tcp, 0.0.0.0:33298->9669/tcp
nebula-docker-compose_graphd2_1    ./bin/nebula-graphd --flag ...        Up (health: starting)              13000/tcp, 13002/tcp, 0.0.0.0:33285->19669/tcp, 0.0.0.0:33284->19670/tcp, 3699/tcp, 0.0.0.0:33286->9669/tcp
nebula-docker-compose_graphd_1     ./bin/nebula-graphd --flag ...        Up (health: starting)              13000/tcp, 13002/tcp, 0.0.0.0:33288->19669/tcp, 0.0.0.0:33287->19670/tcp, 3699/tcp, 0.0.0.0:9669->9669/tcp
nebula-docker-compose_metad0_1     ./bin/nebula-metad --flagf ...        Up (health: starting)              11000/tcp, 11002/tcp, 0.0.0.0:33276->19559/tcp, 0.0.0.0:33275->19560/tcp, 45500/tcp, 45501/tcp, 0.0.0.0:33278->9559/tcp
nebula-docker-compose_metad1_1     ./bin/nebula-metad --flagf ...        Up (health: starting)              11000/tcp, 11002/tcp, 0.0.0.0:33279->19559/tcp, 0.0.0.0:33277->19560/tcp, 45500/tcp, 45501/tcp, 0.0.0.0:33281->9559/tcp
nebula-docker-compose_metad2_1     ./bin/nebula-metad --flagf ...        Up (health: starting)              11000/tcp, 11002/tcp, 0.0.0.0:33282->19559/tcp, 0.0.0.0:33280->19560/tcp, 45500/tcp, 45501/tcp, 0.0.0.0:33283->9559/tcp
nebula-docker-compose_storaged0_1  ./bin/nebula-storaged --fl ...        Up (health: starting)              12000/tcp, 12002/tcp, 0.0.0.0:33290->19779/tcp, 0.0.0.0:33289->19780/tcp, 44500/tcp, 44501/tcp, 0.0.0.0:33294->9779/tcp
nebula-docker-compose_storaged1_1  ./bin/nebula-storaged --fl ...        Up (health: starting)              12000/tcp, 12002/tcp, 0.0.0.0:33296->19779/tcp, 0.0.0.0:33292->19780/tcp, 44500/tcp, 44501/tcp, 0.0.0.0:33299->9779/tcp
nebula-docker-compose_storaged2_1  ./bin/nebula-storaged --fl ...        Up (health: starting)              12000/tcp, 12002/tcp, 0.0.0.0:33297->19779/tcp, 0.0.0.0:33293->19780/tcp, 44500/tcp, 44501/tcp, 0.0.0.0:33300->9779/tcp
```

Nebula Graph provides services to the clients through port `9669` by default. To use other ports, modify the `docker-compose.yml` file in the `nebula-docker-compose` directory and restart the Nebula Graph services.

Check the service data and logs

All the data and logs of Nebula Graph are stored persistently in the `nebula-docker-compose/data` and `nebula-docker-compose/logs` directories.

The structure of the directories is as follows:

```
nebula-docker-compose/
|-- docker-compose.yaml
|-- data
|   |-- meta0
|   |-- meta1
|   |-- meta2
|   |-- storage0
|   |-- storage1
|   |-- storage2
|-- logs
|   |-- graph
|   |-- graph1
|   |-- graph2
|   |-- meta0
|   |-- meta1
|   |-- meta2
|   |-- storage0
|   |-- storage1
|   |-- storage2
```

Stop the Nebula Graph services

You can run the following command to stop the Nebula Graph services:

```
$ docker-compose down
```

The following information indicates you have successfully stopped the Nebula Graph services:

```
Stopping nebula-docker-compose_graphd2_1 ... done
Stopping nebula-docker-compose_graphd1_1 ... done
Stopping nebula-docker-compose_graphd_1 ... done
Stopping nebula-docker-compose_storaged1_1 ... done
Stopping nebula-docker-compose_storaged2_1 ... done
Stopping nebula-docker-compose_storaged0_1 ... done
Stopping nebula-docker-compose_metad0_1 ... done
Stopping nebula-docker-compose_metad1_1 ... done
Stopping nebula-docker-compose_metad2_1 ... done
Removing nebula-docker-compose_graphd2_1 ... done
Removing nebula-docker-compose_graphd1_1 ... done
Removing nebula-docker-compose_graphd_1 ... done
Removing nebula-docker-compose_storaged1_1 ... done
Removing nebula-docker-compose_storaged2_1 ... done
Removing nebula-docker-compose_storaged0_1 ... done
Removing nebula-docker-compose_metad0_1 ... done
Removing nebula-docker-compose_metad1_1 ... done
Removing nebula-docker-compose_metad2_1 ... done
Removing network nebula-docker-compose_nebula-net
```

Danger

The parameter `-v` in the command `docker-compose down -v` will **delete** all your local Nebula Graph storage data. Try this command if you are using the nightly release and having some compatibility issues.

Modify configurations

The configuration file of Nebula Graph deployed by Docker Compose is `nebula-docker-compose/docker-compose.yaml`. To make the new configuration take effect, modify the configuration in this file and restart the service.

For more instructions, see [Configurations](#).

FAQ

HOW TO FIX THE DOCKER MAPPING TO EXTERNAL PORTS?

To set the `ports` of corresponding services as fixed mapping, modify the `docker-compose.yml` in the `nebula-docker-compose` directory. For example:

```
graphd:
  image: vesoft/nebula-graphd:v3.0.0
  ...
  ports:
    - 9669:9669
    - 19669
    - 19670
```

`9669:9669` indicates the internal port 9669 is uniformly mapped to external ports, while `19669` indicates the internal port 19669 is randomly mapped to external ports.

HOW TO UPGRADE OR UPDATE THE DOCKER IMAGES OF NEBULA GRAPH SERVICES

1. In the `nebula-docker-compose/docker-compose.yml` file, change all the `image` values to the required image version.
2. In the `nebula-docker-compose` directory, run `docker-compose pull` to update the images of the Graph Service, Storage Service, and Meta Service.
3. Run `docker-compose up -d` to start the Nebula Graph services again.
4. After connecting to Nebula Graph with Nebula Console, run `SHOW HOSTS GRAPH`, `SHOW HOSTS STORAGE`, or `SHOW HOSTS META` to check the version of the responding service respectively.

ERROR: TOOMANYREQUESTS WHEN DOCKER-COMPOSE PULL

You may meet the following error:

```
ERROR: toomanyrequests: You have reached your pull rate limit. You may increase the limit by authenticating and upgrading: https://www.docker.com/increase-rate-limit.
```

You have met the rate limit of Docker Hub. Learn more on [Understanding Docker Hub Rate Limiting](#).

HOW TO UPDATE THE NEBULA CONSOLE CLIENT

To update the Nebula Console client, run the following command.

```
docker pull vesoft/nebula-console:v2.6.0
```

Related documents

- [Install and deploy Nebula Graph with the source code](#)
- [Install Nebula Graph by RPM or DEB](#)
- [Connect to Nebula Graph](#)

Last update: February 8, 2022

5.2.5 Deploy a Nebula Graph cluster with RPM/DEB package on multiple servers

For now, Nebula Graph does not provide an official deployment tool. Users can deploy a Nebula Graph cluster with RPM or DEB package manually. This topic provides an example of deploying a Nebula Graph cluster on multiple servers (machines).

Deployment

Machine name	IP address	Number of graphd	Number of storaged	Number of metad
A	192.168.10.111	1	1	1
B	192.168.10.112	1	1	1
C	192.168.10.113	1	1	1
D	192.168.10.114	1	1	None
E	192.168.10.115	1	1	None

Prerequisites

Prepare 5 machines for deploying the cluster.

Manual deployment process

STEP 1: INSTALL NEBULA GRAPH

Install Nebula Graph on each machine in the cluster. Available approaches of installation are as follows.

- [Install Nebula Graph with RPM or DEB package](#)
- [Install Nebula Graph by compiling the source code](#)

STEP 2: MODIFY THE CONFIGURATIONS

To deploy Nebula Graph according to your requirements, you have to modify the configuration files.

All the configuration files for Nebula Graph, including `nebula-graphd.conf`, `nebula-metad.conf`, and `nebula-storaged.conf`, are stored in the `etc` directory in the installation path. You only need to modify the configuration for the corresponding service on the machines. The configurations that need to be modified for each machine are as follows.

Machine name	The configuration to be modified
A	<code>nebula-graphd.conf</code> , <code>nebula-storaged.conf</code> , <code>nebula-metad.conf</code>
B	<code>nebula-graphd.conf</code> , <code>nebula-storaged.conf</code> , <code>nebula-metad.conf</code>
C	<code>nebula-graphd.conf</code> , <code>nebula-storaged.conf</code> , <code>nebula-metad.conf</code>
D	<code>nebula-graphd.conf</code> , <code>nebula-storaged.conf</code>
E	<code>nebula-graphd.conf</code> , <code>nebula-storaged.conf</code>

Users can refer to the content of the following configurations, which only show part of the cluster settings. The hidden content uses the default setting so that users can better understand the relationship between the servers in the Nebula Graph cluster.

Note

The main configuration to be modified is `meta_server_addrs`. All configurations need to fill in the IP addresses and ports of all Meta services. At the same time, `local_ip` needs to be modified as the network IP address of the machine itself. For detailed descriptions of the configuration parameters, see:

- [Meta Service configurations](#)
- [Graph Service configurations](#)
- [Storage Service configurations](#)

- Deploy machine A

- `nebula-graphd.conf`

```
##### networking #####
# Comma separated Meta Server Addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-graphd process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.111
# Network device to listen on
--listen_netdev=any
# Port to listen on
--port=9669
```

- `nebula-storaged.conf`

```
##### networking #####
# Comma separated Meta server addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-storaged process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.111
# Storage daemon listening port
--port=9779
```

- `nebula-metad.conf`

```
##### networking #####
# Comma separated Meta Server addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-metad process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.111
# Meta daemon listening port
--port=9559
```

Deploy machine B

- nebula-graphd.conf

```
##### networking #####
# Comma separated Meta Server Addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-graphd process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.112
# Network device to listen on
--listen_netdev=any
# Port to listen on
--port=9669
```

- nebula-storaged.conf

```
##### networking #####
# Comma separated Meta server addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-storaged process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.112
# Storage daemon listening port
--port=9779
```

- nebula-metad.conf

```
##### networking #####
# Comma separated Meta Server addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-metad process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.112
# Meta daemon listening port
--port=9559
```

Deploy machine C

- nebula-graphd.conf

```
##### networking #####
# Comma separated Meta Server Addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-graphd process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.113
# Network device to listen on
--listen_netdev=any
# Port to listen on
--port=9669
```

- nebula-storaged.conf

```
##### networking #####
# Comma separated Meta server addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-storaged process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.113
# Storage daemon listening port
--port=9779
```

- nebula-metad.conf

```
##### networking #####
# Comma separated Meta Server addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-metad process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.113
# Meta daemon listening port
--port=9559
```

Deploy machine D

- nebula-graphd.conf

```
##### networking #####
# Comma separated Meta Server Addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-graphd process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.114
# Network device to listen on
--listen_netdev=any
# Port to listen on
--port=9669
```

- nebula-storaged.conf

```
##### networking #####
# Comma separated Meta server addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-storaged process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.114
# Storage daemon listening port
--port=9779
```

Deploy machine E

- nebula-graphd.conf

```
##### networking #####
# Comma separated Meta Server Addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-graphd process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.115
# Network device to listen on
--listen_netdev=any
# Port to listen on
--port=9669
```

- nebula-storaged.conf

```
##### networking #####
# Comma separated Meta server addresses
--meta_server_addrs=192.168.10.111:9559,192.168.10.112:9559,192.168.10.113:9559
# Local IP used to identify the nebula-storaged process.
# Change it to an address other than loopback if the service is distributed or
# will be accessed remotely.
--local_ip=192.168.10.115
# Storage daemon listening port
--port=9779
```

STEP 3: START THE CLUSTER

Start the corresponding service on **each machine**. Descriptions are as follows.

Machine name	The process to be started
A	graphd, storaged, metad
B	graphd, storaged, metad
C	graphd, storaged, metad
D	graphd, storaged
E	graphd, storaged

The command to start the Nebula Graph services is as follows.

```
sudo /usr/local/nebula/scripts/nebula.service start <metad|graphd|storaged|all>
```

Note

- Make sure all the processes of services on each machine are started. Otherwise, you will fail to start Nebula Graph.
- When the graphd process, the stored process, and the metad process are all started, you can use `all` instead.
- `/usr/local/nebula` is the default installation path for Nebula Graph. Use the actual path if you have customized the path. For more information about how to start and stop the services, see [Manage Nebula Graph services](#).

STEP4: CHECK THE CLUSTER STATUS

Install the native CLI client [Nebula Console](#), then connect to any machine that has started the graphd process, and run `SHOW HOSTS` to check the cluster status. For example:

```
$ ./nebula-console --addr 192.168.10.111 --port 9669 -u root -p nebula

2021/05/25 01:41:19 [INFO] connection pool is initialized successfully
Welcome to Nebula Graph!

> SHOW HOSTS;
+-----+-----+-----+-----+-----+-----+-----+
| Host          | Port | Status | Leader count | Leader distribution | Partition distribution | Version |
+-----+-----+-----+-----+-----+-----+-----+
| "192.168.10.111" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
| "192.168.10.112" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
| "192.168.10.113" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
| "192.168.10.114" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
| "192.168.10.115" | 9779 | "ONLINE" | 0           | "No valid partition" | "No valid partition" | "3.0.0" |
+-----+-----+-----+-----+-----+-----+-----+
```

Last update: February 8, 2022

5.3 Standalone Nebula Graph

Standalone Nebula Graph merges the Meta, Storage, and Graph services into a single process deployed on a single machine. This topic introduces scenarios, deployment steps, etc. of standalone Nebula Graph.

5.3.1 Background

The traditional Nebula Graph consists of three services, each service having executable binary files and the corresponding process. Processes communicate with each other by RPC. In standalone Nebula Graph, the three processes corresponding to the three services are combined into one process. For more information about Nebula Graph, see [Architecture overview](#).

5.3.2 Scenarios

Small data sizes and low availability requirements. For example, test environments that are limited by the number of machines, scenarios that are only used to verify functionality.

Danger

Do not use standalone Nebula Graph in production environments.

5.3.3 Limitations

- Single service instance per machine.
- High availability and reliability not supported.

5.3.4 Resource requirements

For information about the resource requirements for standalone Nebula Graph, see [Software requirements for compiling Nebula Graph](#).

5.3.5 Steps

Currently, you can only install standalone Nebula Graph with the source code. The steps are similar to those of the multi-process Nebula Graph. You only need to modify the step **Generate Makefile with CMake** by adding `-DENABLE_STANDALONE_VERSION=on` to the command. For example:

```
cmake -DCMAKE_INSTALL_PREFIX=/usr/local/nebula -DENABLE_TESTING=OFF -DENABLE_STANDALONE_VERSION=on -DCMAKE_BUILD_TYPE=Release ..
```

For more information about installation details, see [Install Nebula Graph by compiling the source code](#).

After installing standalone Nebula Graph, see the topic [connect to Service](#) to connect to Nebula Graph databases.

5.3.6 Configuration file

The path to the configuration file for standalone Nebula Graph is `/usr/local/nebula/etc` by default.

You can run `sudo cat nebula-standalone.conf.default` to see the file content. The parameters and the corresponding descriptions in the file are generally the same as the configurations for multi-process Nebula Graph except for the following parameters.

Parameter	Predefined value	Description
<code>meta_port</code>	9559	The port number of the Meta service.
<code>storage_port</code>	9779	The port number of the Storage Service.
<code>meta_data_path</code>	data/meta	The path to Meta data.

You can run commands to check configurable parameters and the corresponding descriptions. For details, see [Configurations](#).

Last update: January 14, 2022

5.4 Deploy license

Nebula Graph Enterprise Edition requires the user to deploy a license file before starting the Enterprise Edition. This topic describes how to deploy a license file for the Enterprise Edition.

Enterpriseonly

License is a software authorization certificate provided for users of the Enterprise Edition. Users of the Enterprise Edition can send email to `inquiry@vesoft.com` to apply for a license file.

5.4.1 Precautions

- If the license file is not deployed, Nebula Graph Enterprise Edition cannot be started.
- Do not modify the license file, otherwise the license will become invalid.
- If the license is about to expire, send email to `inquiry@vesoft.com` to apply for renewal.
- The transition period after the license expires is 7 days:
- If you start the Enterprise Edition within 3 days before the license expires or on the day the license expires, a log will be printed as a reminder.
- The license can still be used for 7 days after it expires.
- If the license has expired for 7 days, you will not be able to start the Enterprise Edition, and a log will be printed as a reminder.

5.4.2 License description

You can use `cat` to view the content of the license file (`nebula.license`). The example is as follows:

```
-----License Content Start-----
{
  "vendor": "Vesoft_Inc",
  "organization": "doc",
  "issuedDate": "2021-11-07T16:00:00.000Z",
  "expirationDate": "2021-11-30T15:59:59.000Z",
  "product": "nebula_graph",
  "version": ">2.6.1",
  "licenseType": "enterprise"
}
-----License Content End-----

-----License Key Start-----
cofFc0xxxxxxxxxxxxxxxxZgaxrQ==
-----License Key End-----
```

The license file contains information such as `issuedDate` and `expirationDate`. The description is as follows.

Parameter	Description
<code>vendor</code>	The supplier.
<code>organization</code>	The username.
<code>issuedDate</code>	The date that the license is issued.
<code>expirationDate</code>	The date that the license expires.
<code>product</code>	The product type. The product type of Nebula Graph is <code>nebula_graph</code> .
<code>version</code>	The version information.
<code>licenseType</code>	The license type, including <code>enterprise</code> , <code>small_bussiness</code> , <code>pro</code> , and <code>individual</code> .

5.4.3 Steps

1. Send email to inquiry@vesoft.com to apply for the Nebula Graph Enterprise Edition package.
2. Install Nebula Graph Enterprise Edition. The installation method is the same as the Community Edition. See [Install Nebula Graph with RPM or DEB package](#).
3. Send email to inquiry@vesoft.com to apply for the license file `nebula.license`.
4. Upload the license file to all hosts that contain Meta services. The path is in the `share/resources/` of each Meta service installation directory.

Note

For the upload address of the license file for ecosystem tools, refer to the document of [Ecosystem tools overview](#).

Last update: January 14, 2022

5.5 Manage Nebula Graph Service

You can use the `nebula.service` script to start, stop, restart, terminate, and check the Nebula Graph services. This topic takes starting, stopping and checking the Nebula Graph services for examples.

`nebula.service` is stored in the `/usr/local/nebula/scripts` directory by default, which is also the default installation path of Nebula Graph. If you have customized the path, use the actual path in your environment.

5.5.1 Syntax

```
$ sudo /usr/local/nebula/scripts/nebula.service
[-v] [-c <config_file_path>]
<start|stop|restart|kill|status>
<metad|graphd|storaged|all>
```

Parameter	Description
<code>-v</code>	Display detailed debugging information.
<code>-c</code>	Specify the configuration file path. The default path is <code>/usr/local/nebula/etc/</code> .
<code>start</code>	Start the target services.
<code>stop</code>	Stop the target services.
<code>restart</code>	Restart the target services.
<code>kill</code>	Terminate the target services.
<code>status</code>	Check the status of the target services.
<code>metad</code>	Set the Meta Service as the target service.
<code>graphd</code>	Set the Graph Service as the target service.
<code>storaged</code>	Set the Storage Service as the target service.
<code>all</code>	Set all the Nebula Graph services as the target services.

5.5.2 Start Nebula Graph

In non-container environment

Run the following command to start Nebula Graph.

```
$ sudo /usr/local/nebula/scripts/nebula.service start all
[INFO] Starting nebula-metad...
[INFO] Done
[INFO] Starting nebula-graphd...
[INFO] Done
[INFO] Starting nebula-storaged...
[INFO] Done
```

In docker container (deployed with docker-compose)

Run the following command in the `nebula-docker-compose/` directory to start Nebula Graph.

```
[nebula-docker-compose]$ docker-compose up -d
Building with native build. Learn about native build in Compose here: https://docs.docker.com/go/compose-native-build/
Creating network "nebula-docker-compose_nebula-net" with the default driver
Creating nebula-docker-compose_metad0_1 ... done
Creating nebula-docker-compose_metad2_1 ... done
Creating nebula-docker-compose_metad1_1 ... done
Creating nebula-docker-compose_storaged2_1 ... done
Creating nebula-docker-compose_graphd1_1 ... done
Creating nebula-docker-compose_storaged1_1 ... done
Creating nebula-docker-compose_storaged0_1 ... done
Creating nebula-docker-compose_graphd2_1 ... done
Creating nebula-docker-compose_graphd1 ... done
```

5.5.3 Stop Nebula Graph

Danger

Do not run `kill -9` to forcibly terminate the processes. Otherwise, there is a low probability of data loss.

In non-container environment

Run the following command to stop Nebula Graph.

```
$ sudo /usr/local/nebula/scripts/nebula.service stop all
[INFO] Stopping nebula-metad...
[INFO] Done
[INFO] Stopping nebula-graphd...
[INFO] Done
[INFO] Stopping nebula-storaged...
[INFO] Done
```

In docker container (deployed with docker-compose)

Run the following command in the `nebula-docker-compose/` directory to stop Nebula Graph.

```
nebula-docker-compose]$ docker-compose down
Stopping nebula-docker-compose_graphd1_1 ... done
Stopping nebula-docker-compose_graphd2_1 ... done
Stopping nebula-docker-compose_storaged0_1 ... done
Stopping nebula-docker-compose_storaged1_1 ... done
Stopping nebula-docker-compose_graphd1_1 ... done
Stopping nebula-docker-compose_storaged2_1 ... done
Stopping nebula-docker-compose_metad1_1 ... done
Stopping nebula-docker-compose_metad2_1 ... done
Stopping nebula-docker-compose_metad0_1 ... done
Removing nebula-docker-compose_graphd1_1 ... done
Removing nebula-docker-compose_graphd2_1 ... done
Removing nebula-docker-compose_storaged0_1 ... done
Removing nebula-docker-compose_storaged1_1 ... done
Removing nebula-docker-compose_graphd1_1 ... done
Removing nebula-docker-compose_storaged2_1 ... done
Removing nebula-docker-compose_metad1_1 ... done
Removing nebula-docker-compose_metad2_1 ... done
Removing nebula-docker-compose_metad0_1 ... done
Removing network nebula-docker-compose_nebula-net
```

Note

If you are using a developing or nightly version for testing and have compatibility issues, try to run `docker-compose down -v` to **DELETE** all data stored in Nebula Graph and import data again.

5.5.4 Check the service status

In non-container environment

Run the following command to check the service status of Nebula Graph.

```
$ sudo /usr/local/nebula/scripts/nebula.service status all
```

- Nebula Graph is running normally if the following information is returned.

```
[INFO] nebula-metad(de03025): Running as 26601, Listening on 9559
[INFO] nebula-graphd(de03025): Running as 26644, Listening on 9669
[INFO] nebula-storaged(de03025): Running as 26709, Listening on 9779
```

- If the returned result is similar to the following one, there is a problem. You may also go to the [Nebula Graph community](#) for help.

```
[INFO] nebula-metad: Running as 25600, Listening on 9559
[INFO] nebula-graphd: Exited
[INFO] nebula-storaged: Running as 25646, Listening on 9779
```

The Nebula Graph services consist of the Meta Service, Graph Service, and Storage Service. The configuration files for all three services are stored in the `/usr/local/nebula/etc/` directory by default. You can check the configuration files according to the returned result to troubleshoot problems.

In docker container (deployed with docker-compose)

Run the following command in the `nebula-docker-compose/` directory to check the service status of Nebula Graph.

nebula-docker-compose]\$ docker-compose ps				
Name	Command	State	Ports	
nebula-docker-compose_graphd1_1	/usr/local/nebula/bin/nebu ...	Up (healthy)	0.0.0.0:49223->19669/tcp, 0.0.0.0:49222->19670/tcp, 0.0.0.0:49224->9669/tcp	
nebula-docker-compose_graphd2_1	/usr/local/nebula/bin/nebu ...	Up (healthy)	0.0.0.0:49229->19669/tcp, 0.0.0.0:49228->19670/tcp, 0.0.0.0:49230->9669/tcp	
nebula-docker-compose_graphd_1	/usr/local/nebula/bin/nebu ...	Up (healthy)	0.0.0.0:49221->19669/tcp, 0.0.0.0:49220->19670/tcp, 0.0.0.0:9669->9669/tcp	
nebula-docker-compose_metad0_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:49212->19559/tcp, 0.0.0.0:49211->19560/tcp, 0.0.0.0:49213->9559/tcp, 9560/tcp	
nebula-docker-compose_metad1_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:49209->19559/tcp, 0.0.0.0:49208->19560/tcp, 0.0.0.0:49210->9559/tcp, 9560/tcp	
nebula-docker-compose_metad2_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:49206->19559/tcp, 0.0.0.0:49205->19560/tcp, 0.0.0.0:49207->9559/tcp, 9560/tcp	
nebula-docker-compose_storaged0_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:49218->19779/tcp, 0.0.0.0:49217->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:49219->9779/tcp, 9780/tcp	
nebula-docker-compose_storaged1_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:49215->19779/tcp, 0.0.0.0:49214->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:49216->9779/tcp, 9780/tcp	
nebula-docker-compose_storaged2_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:49226->19779/tcp, 0.0.0.0:49225->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:49227->9779/tcp, 9780/tcp	

If the service is abnormal, you can first confirm the abnormal container name (such as `nebula-docker-compose_graphd2_1`).

Then you can execute `docker ps` to view the corresponding `CONTAINER ID` (such as `2a6c56c405f5`).

[nebula-docker-compose]\$ docker ps						
CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	NAMES	PORTS
2a6c56c405f5	vesoft/nebula-graphd:nightly	"/usr/local/nebula/b..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_graphd2_1	0.0.0.0:49230->9669/tcp, 0.0.0.0:49229->19669/tcp, 0.0.0.0:49228->19670/tcp
7042e0a8e83d	vesoft/nebula-storaged:nightly	"./bin/nebula-storag..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_storaged2_1	9777-9778/tcp, 9780/tcp, 0.0.0.0:49227->9779/tcp, 0.0.0.0:49226->19779/tcp, 0.0.0.0:49225->19780/tcp
18e3ea63ad65	vesoft/nebula-storaged:nightly	"./bin/nebula-storag..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_storaged0_1	9777-9778/tcp, 9780/tcp, 0.0.0.0:49219->9779/tcp, 0.0.0.0:49218->19779/tcp, 0.0.0.0:49217->19780/tcp
4dcabfe8677a	vesoft/nebula-graphd:nightly	"/usr/local/nebula/b..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_graphd1_1	0.0.0.0:49224->9669/tcp, 0.0.0.0:49223->19669/tcp, 0.0.0.0:49222->19670/tcp
a74054c6ae25	vesoft/nebula-graphd:nightly	"/usr/local/nebula/b..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_graphd_1	0.0.0.0:9669->9669/tcp, 0.0.0.0:49221->19669/tcp, 0.0.0.0:49220->19670/tcp
880025a3858c	vesoft/nebula-storaged:nightly	"./bin/nebula-storag..."	36 minutes ago	Up 36 minutes (healthy)	nebula-docker-compose_storaged1_1	9777-9778/tcp, 9780/tcp, 0.0.0.0:49216->9779/tcp, 0.0.0.0:49215->19779/tcp, 0.0.0.0:49214->19780/tcp
45736a32a23a	vesoft/nebula-metad:nightly	"./bin/nebula-metad ..." 36 minutes ago	Up 36 minutes (healthy)	9560/tcp, 0.0.0.0:49213->9559/tcp, 0.0.0.0:49212->19559/tcp, 0.0.0.0:49211->19560/tcp	nebula-docker-compose_metad0_1	
3b2c90eb073e	vesoft/nebula-metad:nightly	"./bin/nebula-metad ..." 36 minutes ago	Up 36 minutes (healthy)	9560/tcp, 0.0.0.0:49207->9559/tcp, 0.0.0.0:49206->19559/tcp, 0.0.0.0:49205->19560/tcp	nebula-docker-compose_metad2_1	
7bb31b7a5b3f	vesoft/nebula-metad:nightly	"./bin/nebula-metad ..." 36 minutes ago	Up 36 minutes (healthy)	9560/tcp, 0.0.0.0:49210->9559/tcp, 0.0.0.0:49209->19559/tcp, 0.0.0.0:49208->19560/tcp	nebula-docker-compose_metad1_1	

Use the `CONTAINER ID` to log in the container and troubleshoot.

```
nebula-docker-compose]$ docker exec -it 2a6c56c405f5 bash
[root@2a6c56c405f5 nebula]#
```

5.5.5 Next to do

[Connect to Nebula Graph](#)

Last update: January 14, 2022

5.6 Connect to Nebula Graph

Nebula Graph supports multiple types of clients, including a CLI client, a GUI client, and clients developed in popular programming languages. This topic provides an overview of Nebula Graph clients and basic instructions on how to use the native CLI client, Nebula Console.

5.6.1 Nebula Graph clients

You can use supported [clients](#) or [console](#) to connect to Nebula Graph.

5.6.2 Use Nebula Console to connect to Nebula Graph

Prerequisites

- You have started [Nebula Graph services](#).
- The machine you plan to run Nebula Console on has network access to Nebula Graph services.
- The Nebula Console version is compatible with the Nebula Graph version.

Note

The same version of Nebula Console and Nebula Graph is the most compatible. There may be compatibility issues when connecting to Nebula Graph with a different version of Nebula Console. You may be unable to connect to Nebula Graph due to the compatibility issue and an error message `incompatible version between client and server` is displayed.

Steps

1. On the [nebula-console](#) page, select a Nebula Console version and click **Assets**.

Note

We recommend that you select the **latest** release.

Nebula Console v2.6.0 Latest Compare Edit Delete

Aiee released this 15 hours ago v2.6.0 0834198

What's Changed

Feature:

- Support SSL connection by @jievance in #138

Others:

- Delete separator line between rows by @yixinglu in #134
- Restore separate lines for plan description table by @yixinglu in #135
- Change MinConnPoolSize by @HarrisChu in #137

Full Changelog: [v2.5.0...v2.6.0](#)

2. In the **Assets** area, find the correct binary file for the machine where you want to run Nebula Console and download the file to the machine.

▼ Assets 9	
 nebula-console-darwin-amd64-v2.6.0	5.42 MB
 nebula-console-darwin-arm64-v2.6.0	5.23 MB
 nebula-console-linux-amd64-v2.6.0	5.44 MB
 nebula-console-linux-arm-v2.6.0	4.68 MB
 nebula-console-linux-arm64-v2.6.0	5.04 MB
 nebula-console-windows-amd64-v2.6.0.exe	5.41 MB
 nebula-console-windows-arm-v2.6.0.exe	4.68 MB
 Source code (zip)	
 Source code (tar.gz)	

3. (Optional) Rename the binary file to `nebula-console` for convenience.

Note

For Windows, rename the file to `nebula-console.exe`.

4. On the machine to run Nebula Console, grant the execute permission of the `nebula-console` binary file to the user.

Note

For Windows, skip this step.

```
$ chmod 111 nebula-console
```

5. In the command line interface, change the working directory to the one where the `nebula-console` binary file is stored.

6. Run the following command to connect to Nebula Graph.

- For Linux or macOS:

```
$ ./nebula-console -addr <ip> -port <port> -u <username> -p <password>
[-t 120] [-e "ngQL_statement" | -f filename.ngQL]
```

- For Windows:

```
> nebula-console.exe -addr <ip> -port <port> -u <username> -p <password>
[-t 120] [-e "ngQL_statement" | -f filename.ngQL]
```

Parameters and descriptions are as follows.

Parameter	Description
<code>-h</code>	Shows the help menu.
<code>-addr</code>	Sets the IP address of the graphd service. The default address is 127.0.0.1.
<code>-port</code>	Sets the port number of the graphd service. The default port number is 9669.
<code>-u/-user</code>	Sets the username of your Nebula Graph account. Before enabling authentication, you can use any existing username. The default username is <code>root</code> .
<code>-p/-password</code>	Sets the password of your Nebula Graph account. Before enabling authentication, you can use any characters as the password.
<code>-t/-timeout</code>	Sets an integer-type timeout threshold of the connection. The unit is second. The default value is 120.
<code>-e/-eval</code>	Sets a string-type nGQL statement. The nGQL statement is executed once the connection succeeds. The connection stops after the result is returned.
<code>-f/-file</code>	Sets the path of an nGQL file. The nGQL statements in the file are executed once the connection succeeds. The result will be returned and the connection stops then.

You can find more details in the [Nebula Console Repository](#).

Last update: January 14, 2022

5.7 Manage Storage hosts

Starting from Nebula Graph 3.0.0, setting Storage hosts in the configuration files only registers the hosts on the Meta side, but does not add them into the cluster. You must run the `ADD HOSTS` statement to add the Storage hosts.

5.7.1 Add Storage hosts

Add the Storage hosts to a Nebula Graph cluster.

```
ADD HOSTS <ip>:<port> [,<ip>:<port> ...];
```

5.7.2 Drop Storage hosts

Delete the Storage hosts from cluster.

Note

You can not delete an in-use Storage host directly. Delete the associated graph space before deleting the Storage host.

```
DROP HOSTS <ip>:<port> [,<ip>:<port> ...];
```

Last update: January 28, 2022

5.8 Upgrade

5.8.1 Upgrade Nebula Graph from version 2.x to 3.0.0

This topic describes how to upgrade Nebula Graph from version 2.x to 3.0.0, taking upgrading from version 2.6.1 to 3.0.0 as an example.

Applicable source versions

This topic applies to upgrading Nebula Graph from 2.0.0 and later 2.x versions to 3.0.0. It does not apply to historical versions earlier than 2.0.0, including the 1.x versions.

To upgrade Nebula Graph from historical versions to 3.0.0:

1. Upgrade it to the latest 2.x version according to the docs of that version.
2. Follow this topic to upgrade it to 3.0.0.

Caution

To upgrade Nebula Graph from versions earlier than 2.0.0 (including the 1.x versions) to 3.0.0, you need to find the `date_time_zonespec.csv` in the `share/resources` directory of 3.0.0 files, and then copy it to the same directory in the Nebula Graph installation path.

Limitations

- Rolling Upgrade is not supported. You must stop all the Nebula Graph services before the upgrade.
- There is no upgrade script. You have to manually upgrade each server in the cluster.
- This topic does not apply to scenarios where Nebula Graph is deployed with Docker, including Docker Swarm, Docker Compose, and K8s.
- You must upgrade the old Nebula Graph services on the same machines they are deployed. **DO NOT** change the IP addresses, configuration files of the machines, and **DO NOT** change the cluster topology.
- The hard disk space of each machine should be **more than three times** as much as the space taken by the original data directories.
- Known issues that could cause data loss are listed on [GitHub known issues](#). The issues are all related to altering schema or default values.
- **DO NOT** use soft links to switch the data directories.
- You must have the sudo privileges to complete the steps in this topic.

Upgrade influences

- Data swelling

The Nebula Graph 3.x version expands the original data format with one more key per vertex, so the data takes up more space after the upgrade.

The format of the new key is:

Type (1 byte) + Partition ID (3 bytes) + VID (size depends on the data type).

The value of the new key is empty. The extra space taken can be calculated based on the number of vertices and the data type of the VID. For example, if there are 100 million vertices in the dataset and the VIDs are INT64, the new key will take 100 million $\times (1 + 3 + 8) = 1.2$ billion bytes, i.e., about 1.2 GB.

- Client compatibility

After the upgrade, you will not be able to connect to Nebula Graph from old clients. You will need to upgrade all clients to a version compatible with Nebula Graph 3.0.0.

- Configuration changes

A few configuration parameters have been changed. For more information, see the release notes and configuration docs.

- nGQL compatibility

The nGQL syntax is partially incompatible:

- Disable the `YIELD` clause to return custom variables.
- The `YIELD` clause is required in the `FETCH`, `GO`, `LOOKUP`, `FIND PATH` and `GET SUBGRAPH` statements.
- It is required to specify a tag to query properties of a vertex in a `MATCH` statement. For example, from `return v.name` to `return v.player.name`.

Caution

There may be other undiscovered influences. Before the upgrade, we recommend that you read the release notes and user manual carefully, and keep an eye on the [posts](#) on the forum and [issues](#) on Github.

Preparations before the upgrade

- Download the TAR file of Nebula Graph 3.0.0 according to your operating system and system architecture. You need the binary files during the upgrade. Find the TAR file on [the download page](#).

Note

You can also get the new binaries from the source code or the RPM/DEB package.

- Locate the data files based on the value of the `data_path` parameters in the Storage and Meta configurations, and backup the data files. The default paths are `nebula/data/storage` and `nebula/data/meta`.
- Backup the configuration files.
- Collect the statistics of all graph spaces before the upgrade. After the upgrade, you can collect again and compare the results to make sure that no data is lost. To collect the statistics:

a. Run `SUBMIT JOB STATS`.

b. Run `SHOW JOBS` and record the result.

Upgrade steps

1. Stop all Nebula Graph services.

```
<nebula_install_path>/scripts/nebula.service stop all
```

`nebula_install_path` indicates the installation path of Nebula Graph.

The stored progress needs around 1 minute to flush data. You can run `nebula.service status all` to check if all services are stopped. For more information about starting and stopping services, see [Manage services](#).

Note

If the services are not fully stopped in 20 minutes, stop upgrading and ask for help on [the forum](#) or [Github](#).

2. In the target path where you unpacked the TAR file, use the binaries in the `bin` directory to replace the old binaries in the `bin` directory in the Nebula Graph installation path.

Note

Update the binary of the corresponding service on each Nebula Graph server.

3. Modify the following parameters in all Graph configuration files to accommodate the value range of the new version. If the parameter values are within the specified range, skip this step.

- Set a value in [1,604800] for `session_idle_timeout_secs`. The recommended value is 28800.
- Set a value in [1,604800] for `client_idle_timeout_secs`. The recommended value is 28800.

The default values of these parameters in the 2.x versions are not within the range of the new version. If you do not change the default values, the upgrade will fail. For detailed parameter description, see [Graph Service Configuration](#).

4. Start all Meta services.

```
<nebula_install_path>/scripts/nebula-metad.service start
```

Once started, the Meta services take several seconds to elect a leader.

To verify that Meta services are all started, you can start any Graph server, connect to it through Nebula Console, and run `SHOW HOSTS meta` and `SHOW META LEADER`. If the status of Meta services are correctly returned, the services are successfully started.

Note

If the operation fails, stop the upgrade and ask for help on [the forum](#) or [GitHub](#).

5. Use the new `db_upgrader` file in the `bin` directory to upgrade the format of old data.

Caution

This step backs up the Storage data. But to prevent backup failures and data loss, before executing this step, make sure that you have followed the **Preparations before the upgrade** section and backed up the Meta data and Storage data.

Command syntax:

```
<nebula_install_path>/bin/db_upgrader \
--src_db_path=<old_storage_data_path> \
--dst_db_path=<data_backup_path> \
--upgrade_meta_server=<meta_server_ip>:<port>[, <meta_server_ip>:<port> ...] \
--upgrade_version=2:3
```

- `old_storage_data_path` indicates the path of the Storage data. It is defined by the `data_path` parameter in the Storage configuration files.
- `data_backup_path` indicates a custom path for data backup.
- `meta_server_ip` and `port` indicate the IP address and port number of a Meta server.
- `2:3` indicates that the upgrade is from version 2.x to 3.x.

Example for the test in this topic:

```
<nebula_install_path>/bin/db_upgrader \
--src_db_path=/usr/local/nebula/data/storage \
--dst_db_path=/home/vesoft/nebula/data-backup \
--upgrade_meta_server=192.168.8.132:9559 \
--upgrade_version=2:3
```

Note

If the operation fails, stop the upgrade and ask for help on [the forum](#) or [GitHub](#).

6. Start all the Graph and Storage services.

Note

If the operation fails, stop the upgrade and ask for help on [the forum](#) or [GitHub](#).

7. Connect to the new version of Nebula Graph to verify that services are available and data are complete. For how to connect, see [Connect to Nebula Graph](#).

Currently, there is no official way to check whether the upgrade is successful. You can run the following reference statements to test the upgrade:

```
nebula> SHOW HOSTS;
nebula> SHOW HOSTS storage;
nebula> SHOW SPACES;
nebula> USE <space_name>
nebula> SHOW PARTS;
nebula> SUBMIT JOB STATS;
nebula> SHOW STATS;
nebula> MATCH (v) RETURN v LIMIT 5;
```

You can also test against [new features](#) in version 3.0.0.

Upgrade failure and rollback

If the upgrade fails, stop all Nebula Graph services of the new version, recover the old configuration files and binaries, and start the services of the old version.

All Nebula Graph clients in use must be switched to the old version.

FAQ

CAN I WRITE THROUGH THE CLIENT DURING THE UPGRADE?

A: No. You must stop all Nebula Graph services during the upgrade.

HOW TO UPGRADE IF A MACHINE HAS ONLY THE GRAPH SERVICE, BUT NOT THE STORAGE SERVICE?

A: You only need to update the configuration files and binaries of the Graph Service.

HOW TO RESOLVE THE ERROR `PERMISSION DENIED` ?

A: Try again with the sudo privileges.

IS THERE ANY CHANGE IN GFLAGS?

A: Yes. For more information, see the release notes and configuration docs.

IS THERE A TOOL OR SOLUTION FOR VERIFYING DATA CONSISTENCY AFTER THE UPGRADE?

A: No. But if you only want to check the number of vertices and edges, run `SUBMIT JOB STATS` and `SHOW STATS` after the upgrade, and compare the result with the result that you recorded before the upgrade.

HOW TO SOLVE THE ISSUE THAT STORAGE IS `OFFLINE` AND `LEADER COUNT` IS 0 ?

A: Run the following statement to add the Storage hosts into the cluster manually.

```
ADD HOSTS <ip>:<port>[, <ip>:<port> ...];
```

For example:

```
ADD HOSTS 192.168.10.100:9779, 192.168.10.101:9779, 192.168.10.102:9779;
```

If the issue persists, ask for help on [the forum](#) or [GitHub](#).

WHY THE JOB TYPE CHANGED AFTER THE UPGRADE, BUT JOB ID REMAINS THE SAME?

A: `SHOW JOBS` depends on an internal ID to identify job types, but in Nebula Graph 2.5.0 the internal ID changed in [this pull request](#), so this issue happens after upgrading from a version earlier than 2.5.0.

Last update: February 14, 2022

5.9 Uninstall Nebula Graph

This topic describes how to uninstall Nebula Graph.

Caution

Before re-installing Nebula Graph on a machine, follow this topic to completely uninstall the old Nebula Graph, in case the remaining data interferes with the new services, including inconsistencies between Meta services.

5.9.1 Prerequisite

The Nebula Graph services should be stopped before the uninstallation. For more information, see [Manage Nebula Graph services](#).

5.9.2 Step 1: Delete data files of the Storage and Meta Services

If you have modified the `data_path` in the configuration files for the Meta Service and Storage Service, the directories where Nebula Graph stores data may not be in the installation path of Nebula Graph. Check the configuration files to confirm the data paths, and then manually delete the directories to clear all data.

Note

For a Nebula Graph cluster, delete the data files of all Storage and Meta servers.

1. Check the [Storage Service disk settings](#). For example:

```
##### Disk #####
# Root data path. Split by comma. e.g. --data_path=/disk1/path1/,/disk2/path2/
# One path per Rocksdb instance.
--data_path=/nebula/data/storage
```

2. Check the Metad Service configurations and find the corresponding metadata directories.
3. Delete the data and the directories found in step 2.

5.9.3 Step 2: Delete the installation directories

Note

Delete all installation directories, including the `cluster.id` file in them.

The default installation path is `/usr/local/nebula`, which is specified by `--prefix` while installing Nebula Graph.

Uninstall Nebula Graph deployed with source code

Find the installation directories of Nebula Graph, and delete them all.

Uninstall Nebula Graph deployed with RPM packages

1. Run the following command to get the Nebula Graph version.

```
$ rpm -qa | grep "nebula"
```

The return message is as follows.

```
nebula-graph-3.0.0-1.x86_64
```

2. Run the following command to uninstall Nebula Graph.

```
sudo rpm -e <nebula_version>
```

For example:

```
sudo rpm -e nebula-graph-3.0.0-1.x86_64
```

3. Delete the installation directories.

Uninstall Nebula Graph deployed with DEB packages

1. Run the following command to get the Nebula Graph version.

```
$ dpkg -l | grep "nebula"
```

The return message is as follows.

```
ii  nebula-graph  3.0.0  amd64  Nebula Package built using CMake
```

2. Run the following command to uninstall Nebula Graph.

```
sudo dpkg -r <nebula_version>
```

For example:

```
sudo dpkg -r nebula-graph
```

3. Delete the installation directories.

Uninstall Nebula Graph deployed with Docker Compose

1. In the `nebula-docker-compose` directory, run the following command to stop the Nebula Graph services.

```
docker-compose down -v
```

2. Delete the `nebula-docker-compose` directory.

Last update: January 18, 2022

6. Configurations and logs

6.1 Configurations

6.1.1 Configurations

Nebula Graph builds the configurations based on the `gflags` repository. Most configurations are flags. When the Nebula Graph service starts, it will get the configuration information from `Configuration files` by default. Configurations that are not in the file apply the default values.

Note

- Because there are many configurations and they may change as Nebula Graph develops, this topic will not introduce all configurations. To get detailed descriptions of configurations, follow the instructions below.
- It is not recommended to modify the configurations that are not introduced in this topic, unless you are familiar with the source code and fully understand the function of configurations.

Legacy version compatibility

In the topic of 1.x, we provide a method of using the `CONFIGS` command to modify the configurations in the cache. However, using this method in a production environment can easily cause inconsistencies of configurations between clusters and the local. Therefore, this method will no longer be introduced in the topic of 2.x.

Get the configuration list and descriptions

Use the following command to get all the configuration information of the service corresponding to the binary file:

```
<binary> --help
```

For example:

```
# Get the help information from Meta
$ /usr/local/nebula/bin/nebula-metad --help

# Get the help information from Graph
$ /usr/local/nebula/bin/nebula-graphd --help

# Get the help information from Storage
$ /usr/local/nebula/bin/nebula-storaged --help
```

The above examples use the default storage path `/usr/local/nebula/bin/`. If you modify the installation path of Nebula Graph, use the actual path to query the configurations.

Get configurations

Use the `curl` command to get the value of the running configurations.

Legacy version compatibility

The `curl` commands and parameters in Nebula Graph v2.x. are different from Nebula Graph v1.x.

For example:

```
# Get the running configurations from Meta
curl 127.0.0.1:19559/flags

# Get the running configurations from Graph
curl 127.0.0.1:19669/flags
```



```
# Get the running configurations from Storage
curl 127.0.0.1:19779/flags
```

Note

In an actual environment, use the real host IP address instead of `127.0.0.1` in the above example.

Configuration files

CONFIGURATION FILES FOR CLUSTERS INSTALLED FROM SOURCE, WITH AN RPM/DEB PACKAGE, OR A TAR PACKAGE

Nebula Graph provides two initial configuration files for each service, `<service_name>.conf.default` and `<service_name>.conf.production`. You can use them in different scenarios conveniently. For clusters installed from source and with a RPM/DEB package, the default path is `/usr/local/nebula/etc/`. For clusters installed with a TAR package, the path is `<install_path>/<tar_package_directory>/etc`.

The configuration values in the initial configuration file are for reference only and can be adjusted according to actual needs. To use the initial configuration file, choose one of the above two files and delete the suffix `.default` or `.production` to make it valid.

Caution

To ensure the availability of services, the configurations of the same service must be consistent, except for the local IP address `local_ip`. For example, three Storage servers are deployed in one Nebula Graph cluster. The configurations of the three Storage servers need to be the same, except for the IP address.

The initial configuration files corresponding to each service are as follows.

Nebula Graph service	Initial configuration file	Description
Meta	<code>nebula-metad.conf.default</code> and <code>nebula-metad.conf.production</code>	Meta service configuration
Graph	<code>nebula-graphd.conf.default</code> and <code>nebula-graphd.conf.production</code>	Graph service configuration
Storage	<code>nebula-storaged.conf.default</code> and <code>nebula-storaged.conf.production</code>	Storage service configuration

Each initial configuration file of all services contains `local_config`. The default value is `true`, which means that the Nebula Graph service will get configurations from its configuration files and start it.

Caution

It is not recommended to modify the value of `local_config` to `false`. If modified, the Nebula Graph service will first read the cached configurations, which may cause configuration inconsistencies between clusters and cause unknown risks.

CONFIGURATION FILES FOR CLUSTERS INSTALLED WITH DOCKER COMPOSE

For clusters installed with Docker Compose, the configuration file's default installation path of the cluster is `<install_path>/nebula-docker-compose/docker-compose.yaml`. The parameters in the `command` field of the file are the launch parameters for each service.

CONFIGURATION FILES FOR CLUSTERS INSTALLED WITH NEBULA OPERATOR

For clusters installed with Kubectl through Nebula Operator, the configuration file's path is the path of the cluster YAML file. You can modify the configuration of each service through the `spec.{graphd|storaged|metad}.config` parameter.

Note

The services cannot be configured for clusters installed with Helm.

Modify configurations

By default, each Nebula Graph service gets configured from its configuration files. You can modify configurations and make them valid according to the following steps:

- For clusters installed from source, with a RPM/DEB, or a TAR package
 - a. Use a text editor to modify the configuration files of the target service and save the modification.
 - b. Choose an appropriate time to restart **all** Nebula Graph services to make the modifications valid.
- For clusters installed with Docker Compose
 - a. In the `<install_path>/nebula-docker-compose/docker-compose.yaml` file, modify the configurations of the target service.
 - b. In the `nebula-docker-compose` directory, run the command `docker-compose up -d` to restart the service involving configuration modifications.
- For clusters installed with Kubectl

For details, see [Customize configuration parameters for a Nebula Graph cluster](#).

1. Use a text editor to modify the configuration files of the target service and save the modification.
2. Choose an appropriate time to restart **all** Nebula Graph services to make the modifications valid.

Last update: January 18, 2022

6.1.2 Meta Service configuration

Nebula Graph provides two initial configuration files for the Meta Service, `nebula-metad.conf.default` and `nebula-metad.conf.production`. Users can use them in different scenarios conveniently. The default file path is `/usr/local/nebula/etc/`.

Caution

- It is not recommended to modify the value of `local_config` to `false`. If modified, the Nebula Graph service will first read the cached configurations, which may cause configuration inconsistencies between clusters and cause unknown risks.
- It is not recommended to modify the configurations that are not introduced in this topic, unless you are familiar with the source code and fully understand the function of configurations.

How to use the configuration files

To use the initial configuration file, choose one of the above two files and delete the suffix `.default` or `.production` from the initial configuration file for the Meta Service to apply the configurations defined in it.

About parameter values

If a parameter is not set in the configuration file, Nebula Graph uses the default value. Not all parameters are predefined. And the predefined parameters in the two initial configuration files are different. This topic uses the parameters in `nebula-metad.conf.default`.

For all parameters and their current values, see [Configurations](#).

Basics configurations

Name	Predefined value	Description
<code>daemonize</code>	<code>true</code>	When set to <code>true</code> , the process is a daemon process.
<code>pid_file</code>	<code>pids/nebula-metad.pid</code>	The file that records the process ID.
<code>timezone_name</code>	-	Specifies the Nebula Graph time zone. This parameter is not predefined in the initial configuration files. You can manually set it if you need it. The system default value is <code>UTC+00:00:00</code> . For the format of the parameter value, see Specifying the Time Zone with TZ . For example, <code>--timezone_name=UTC+08:00</code> represents the GMT+8 time zone.
<code>license_path</code>	<code>share/resources/nebula.license</code>	Path of the license of the Nebula Graph Enterprise Edition. Users need to deploy a license file before starting the Enterprise Edition. This parameter is required only for the Nebula Graph Enterprise Edition. For details about how to configure licenses for other ecosystem tools, see the deployment documents of the corresponding ecosystem tools.

Note

- While inserting property values of [time types](#), Nebula Graph transforms time types (except `TIMESTAMP`) to the corresponding UTC according to the time zone specified by `timezone_name`. The time-type values returned by nGQL queries are all UTC time.
- `timezone_name` is only used to transform the data stored in Nebula Graph. Other time-related data of the Nebula Graph processes still uses the default time zone of the host, such as the log printing time.

Logging configurations

Name	Predefined value	Description
<code>log_dir</code>	<code>logs</code>	The directory that stores the Meta Service log. It is recommended to put logs on a different hard disk from the data.
<code>minloglevel</code>	<code>0</code>	Specifies the minimum level of the log. That is, no logs below this level will be printed. Optional values are <code>0</code> (INFO), <code>1</code> (WARNING), <code>2</code> (ERROR), <code>3</code> (FATAL). It is recommended to set it to <code>0</code> during debugging and <code>1</code> in a production environment. If it is set to <code>4</code> , Nebula Graph will not print any logs.
<code>v</code>	<code>0</code>	Specifies the detailed level of the log. The larger the value, the more detailed the log is. Optional values are <code>0</code> , <code>1</code> , <code>2</code> , <code>3</code> .
<code>logbufsecs</code>	<code>0</code>	Specifies the maximum time to buffer the logs. If there is a timeout, it will output the buffered log to the log file. <code>0</code> means real-time output. This configuration is measured in seconds.
<code>redirect_stdout</code>	<code>true</code>	When set to <code>true</code> , the process redirects the <code>stdout</code> and <code>stderr</code> to separate output files.
<code>stdout_log_file</code>	<code>metad-stdout.log</code>	Specifies the filename for the <code>stdout</code> log.
<code>stderr_log_file</code>	<code>metad-stderr.log</code>	Specifies the filename for the <code>stderr</code> log.
<code>stderrthreshold</code>	<code>2</code>	Specifies the <code>minloglevel</code> to be copied to the <code>stderr</code> log.
<code>timestamp_in_logfile_name</code>	<code>true</code>	Specifies if the log file name contains a timestamp. <code>true</code> indicates yes, <code>false</code> indicates no.

Networking configurations

Name	Predefined value	Description
<code>meta_server_addrs</code>	<code>127.0.0.1:9559</code>	Specifies the IP addresses and ports of all Meta Services. Multiple addresses are separated with commas.
<code>local_ip</code>	<code>127.0.0.1</code>	Specifies the local IP for the Meta Service. The local IP address is used to identify the nebula-metad process. If it is a distributed cluster or requires remote access, modify it to the corresponding address.
<code>port</code>	<code>9559</code>	Specifies RPC daemon listening port of the Meta service. The external port for the Meta Service is predefined to <code>9559</code> . The internal port is predefined to <code>port + 1</code> , i.e., <code>9560</code> . Nebula Graph uses the internal port for multi-replica interactions.
<code>ws_ip</code>	<code>0.0.0.0</code>	Specifies the IP address for the HTTP service.
<code>ws_http_port</code>	<code>19559</code>	Specifies the port for the HTTP service.
<code>ws_h2_port</code>	<code>19560</code>	Specifies the port for the HTTP2 service.
<code>ws_storage_http_port</code>	<code>19779</code>	Specifies the Storage service listening port used by the HTTP protocol. It must be consistent with the <code>ws_http_port</code> in the Storage service configuration file.
<code>heartbeat_interval_secs</code>	<code>10</code>	Specifies the default heartbeat interval. Make sure the <code>heartbeat_interval_secs</code> values for all services are the same, otherwise Nebula Graph CANNOT work normally. This configuration is measured in seconds.

Caution

The real IP address must be used in the configuration file. Otherwise, `127.0.0.1/0.0.0.0` cannot be parsed correctly in some cases.

Storage configurations

Name	Predefined Value	Description
<code>data_path</code>	<code>data/meta</code>	The storage path for Meta data.

Misc configurations

Name	Predefined Value	Description
<code>default_parts_num</code>	<code>100</code>	Specifies the default partition number when creating a new graph space.
<code>default_replica_factor</code>	<code>1</code>	Specifies the default replica number when creating a new graph space.

RocksDB options configurations

Name	Predefined Value	Description
<code>rocksdb_wal_sync</code>	<code>true</code>	Enables or disables RocksDB WAL synchronization. Available values are <code>true</code> (enable) and <code>false</code> (disable).

Last update: January 19, 2022

6.1.3 Graph Service configuration

Nebula Graph provides two initial configuration files for the Graph Service, `nebula-graphd.conf.default` and `nebula-graphd.conf.production`. Users can use them in different scenarios conveniently. The default file path is `/usr/local/nebula/etc/`.

Caution

- It is not recommended to modify the value of `local_config` to `false`. If modified, the Nebula Graph service will first read the cached configurations, which may cause configuration inconsistencies between clusters and cause unknown risks.
- It is not recommended to modify the configurations that are not introduced in this topic, unless you are familiar with the source code and fully understand the function of configurations.

How to use the configuration files

To use the initial configuration file, choose one of the above two files and delete the suffix `.default` or `.production` from the initial configuration file for the Meta Service to apply the configurations defined in it.

About parameter values

If a parameter is not set in the configuration file, Nebula Graph uses the default value. Not all parameters are predefined. And the predefined parameters in the two initial configuration files are different. This topic uses the parameters in `nebula-metad.conf.default`.

For all parameters and their current values, see [Configurations](#).

Basics configurations

Name	Predefined value	Description
<code>daemonize</code>	<code>true</code>	When set to <code>true</code> , the process is a daemon process.
<code>pid_file</code>	<code>pids/nebula-graphd.pid</code>	The file that records the process ID.
<code>enable_optimizer</code>	<code>true</code>	When set to <code>true</code> , the optimizer is enabled.
<code>timezone_name</code>	-	Specifies the Nebula Graph time zone. This parameter is not predefined in the initial configuration files. The system default value is <code>UTC+00:00:00</code> . For the format of the parameter value, see Specifying the Time Zone with TZ . For example, <code>--timezone_name=UTC+08:00</code> represents the GMT+8 time zone.
<code>local_config</code>	<code>true</code>	When set to <code>true</code> , the process gets configurations from the configuration files.

Note

- While inserting property values of [time types](#), Nebula Graph transforms time types (except `TIMESTAMP`) to the corresponding UTC according to the time zone specified by `timezone_name`. The time-type values returned by nGQL queries are all UTC time.
- `timezone_name` is only used to transform the data stored in Nebula Graph. Other time-related data of the Nebula Graph processes still uses the default time zone of the host, such as the log printing time.

Logging configurations

Name	Predefined value	Description
<code>log_dir</code>	<code>logs</code>	The directory that stores the Meta Service log. It is recommended to put logs on a different hard disk from the data.
<code>minloglevel</code>	<code>0</code>	Specifies the minimum level of the log. That is, no logs below this level will be printed. Optional values are <code>0</code> (INFO), <code>1</code> (WARNING), <code>2</code> (ERROR), <code>3</code> (FATAL). It is recommended to set it to <code>0</code> during debugging and <code>1</code> in a production environment. If it is set to <code>4</code> , Nebula Graph will not print any logs.
<code>v</code>	<code>0</code>	Specifies the detailed level of the log. The larger the value, the more detailed the log is. Optional values are <code>0</code> , <code>1</code> , <code>2</code> , <code>3</code> .
<code>logbufsecs</code>	<code>0</code>	Specifies the maximum time to buffer the logs. If there is a timeout, it will output the buffered log to the log file. <code>0</code> means real-time output. This configuration is measured in seconds.
<code>redirect_stdout</code>	<code>true</code>	When set to <code>true</code> , the process redirects the <code>stdout</code> and <code>stderr</code> to separate output files.
<code>stdout_log_file</code>	<code>graphd-stdout.log</code>	Specifies the filename for the <code>stdout</code> log.
<code>stderr_log_file</code>	<code>graphd-stderr.log</code>	Specifies the filename for the <code>stderr</code> log.
<code>stderrthreshold</code>	<code>2</code>	Specifies the <code>minloglevel</code> to be copied to the <code>stderr</code> log.
<code>timestamp_in_logfile_name</code>	<code>true</code>	Specifies if the log file name contains a timestamp. <code>true</code> indicates yes, <code>false</code> indicates no.

Query configurations

Name	Predefined value	Description
<code>accept_partial_success</code>	<code>false</code>	When set to <code>false</code> , the process treats partial success as an error. This configuration only applies to read-only requests. Write requests always treat partial success as an error.
<code>session_reclaim_interval_secs</code>	<code>10</code>	Specifies the interval that the Session information is sent to the Meta service. This configuration is measured in seconds.
<code>max_allowed_query_size</code>	<code>4194304</code>	Specifies the maximum length of queries. Unit: bytes. The default value is <code>4194304</code> , namely 4MB.

Networking configurations

Name	Predefined value	Description
<code>meta_server_addrs</code>	<code>127.0.0.1:9559</code>	Specifies the IP addresses and ports of all Meta Services. Multiple addresses are separated with commas.
<code>local_ip</code>	<code>127.0.0.1</code>	Specifies the local IP for the Graph Service. The local IP address is used to identify the nebula-graphd process. If it is a distributed cluster or requires remote access, modify it to the corresponding address.
<code>listen_netdev</code>	<code>any</code>	Specifies the listening network device.
<code>port</code>	<code>9669</code>	Specifies RPC daemon listening port of the Graph service.
<code>reuse_port</code>	<code>false</code>	When set to <code>false</code> , the <code>SO_REUSEPORT</code> is closed.
<code>listen_backlog</code>	<code>1024</code>	Specifies the maximum length of the connection queue for socket monitoring. This configuration must be modified together with the <code>net.core.somaxconn</code> .
<code>client_idle_timeout_secs</code>	<code>28800</code>	Specifies the time to expire an idle connection. The default is 8 hours. <code>0</code> means that the connection will never expire. This configuration is measured in seconds.
<code>session_idle_timeout_secs</code>	<code>28800</code>	Specifies the time to expire an idle session. The value ranges from 1 to 604800. The default is 8 hours. This configuration is measured in seconds.
<code>num_accept_threads</code>	<code>1</code>	Specifies the number of threads that accept incoming connections.
<code>num_netio_threads</code>	<code>0</code>	Specifies the number of networking IO threads. <code>0</code> is the number of CPU cores.
<code>num_worker_threads</code>	<code>0</code>	Specifies the number of threads that execute queries. <code>0</code> is the number of CPU cores.
<code>ws_ip</code>	<code>0.0.0.0</code>	Specifies the IP address for the HTTP service.
<code>ws_http_port</code>	<code>19669</code>	Specifies the port for the HTTP service.
<code>ws_h2_port</code>	<code>19670</code>	Specifies the port for the HTTP2 service.
<code>heartbeat_interval_secs</code>	<code>10</code>	Specifies the default heartbeat interval. Make sure the <code>heartbeat_interval_secs</code> values for all services are the same, otherwise Nebula Graph CANNOT work normally. This configuration is measured in seconds.
<code>storage_client_timeout_ms</code>	<code>-</code>	Specifies the RPC connection timeout threshold between the Graph Service and the Storage Service. This parameter is not predefined in the initial configuration files. You can manually set it if you need it. The system default value is <code>60000</code> ms.
<code>ws_meta_http_port</code>	<code>19559</code>	Specifies the Meta service listening port used by the HTTP protocol. It must be consistent with the <code>ws_http_port</code> in the Meta service configuration file.

Caution

The real IP address must be used in the configuration file. Otherwise, `127.0.0.1/0.0.0.0` cannot be parsed correctly in some cases.

Charset and collate configurations

Name	Predefined value	Description
<code>default_charset</code>	<code>utf8</code>	Specifies the default charset when creating a new graph space.
<code>default_collate</code>	<code>utf8_bin</code>	Specifies the default collate when creating a new graph space.

Authorization configurations

Name	Predefined value	Description
<code>enable_authorize</code>	<code>false</code>	When set to <code>false</code> , the system authentication is not enabled. For more information, see Authentication .
<code>auth_type</code>	<code>password</code>	Specifies the login method. Available values are <code>password</code> , <code>ldap</code> , and <code>cloud</code> .

Memory configurations

Name	Predefined value	Description
<code>system_memory_high_watermark_ratio</code>	<code>0.8</code>	Specifies the trigger threshold of the high-level memory alarm mechanism. If the system memory usage is higher than this value, an alarm mechanism will be triggered, and Nebula Graph will stop querying. This parameter is not predefined in the initial configuration files.

Metrics configurations

Name	Predefined value	Description
<code>enable_space_level_metrics</code>	<code>false</code>	Enable or disable space-level metrics. Such metric names contain the name of the graph space that it monitors, for example, <code>query_latency_us{space=basketballplayer}.avg.3600</code> . You can view the supported metrics with the <code>curl</code> command. For more information, see Query Nebula Graph metrics .

Experimental configurations

Name	Predefined value	Description
<code>enable_experimental_feature</code>	<code>false</code>	Specifies the experimental feature. Optional values are <code>true</code> and <code>false</code> . For currently supported experimental features, see below.

EXPERIMENTAL FEATURES

Name	Description
TOSS	The TOSS (Transaction on Storage Side) function is used to ensure the final consistency of the <code>INSERT</code> , <code>UPDATE</code> , <code>UPSERT</code> , or <code>DELETE</code> operations on edges (because one edge logically corresponds to two key-value pairs on the hard disk). After the TOSS function is enabled, the time delay of related operations will be increased by about one time.

Last update: January 19, 2022

6.1.4 Storage Service configurations

Nebula Graph provides two initial configuration files for the Storage Service, `nebula-storaged.conf.default` and `nebula-storaged.conf.production`. Users can use them in different scenarios conveniently. The default file path is `/usr/local/nebula/etc/`.

Caution

- It is not recommended to modify the value of `local_config` to `false`. If modified, the Nebula Graph service will first read the cached configurations, which may cause configuration inconsistencies between clusters and cause unknown risks.
- It is not recommended to modify the configurations that are not introduced in this topic, unless you are familiar with the source code and fully understand the function of configurations.

How to use the configuration files

To use the initial configuration file, choose one of the above two files and delete the suffix `.default` or `.production` from the initial configuration file for the Meta Service to apply the configurations defined in it.

About parameter values

If a parameter is not set in the configuration file, Nebula Graph uses the default value. Not all parameters are predefined. And the predefined parameters in the two initial configuration files are different. This topic uses the parameters in `nebula-metad.conf.default`. For parameters that are not included in `nebula-metad.conf.default`, see `nebula-storaged.conf.production`.

Note

The configurations of the Raft Listener and the Storage service are different. For details, see [Deploy Raft listener](#).

For all parameters and their current values, see [Configurations](#).

Basics configurations

Name	Predefined value	Description
<code>daemonize</code>	<code>true</code>	When set to <code>true</code> , the process is a daemon process.
<code>pid_file</code>	<code>pids/nebula-storaged.pid</code>	The file that records the process ID.
<code>timezone_name</code>	-	Specifies the Nebula Graph time zone. This parameter is not predefined in the initial configuration files. The system default value is <code>UTC+00:00:00</code> . For the format of the parameter value, see Specifying the Time Zone with TZ . For example, <code>--timezone_name=UTC+08:00</code> represents the GMT+8 time zone.
<code>local_config</code>	<code>true</code>	When set to <code>true</code> , the process gets configurations from the configuration files.

Note

- While inserting property values of [time types](#), Nebula Graph transforms time types (except `TIMESTAMP`) to the corresponding UTC according to the time zone specified by `timezone_name`. The time-type values returned by nGQL queries are all UTC.
- `timezone_name` is only used to transform the data stored in Nebula Graph. Other time-related data of the Nebula Graph processes still uses the default time zone of the host, such as the log printing time.

Logging configurations

Name	Predefined value	Description
<code>log_dir</code>	<code>logs</code>	The directory that stores the Meta Service log. It is recommended to put logs on a different hard disk from the data.
<code>minloglevel</code>	<code>0</code>	Specifies the minimum level of the log. That is, no logs below this level will be printed. Optional values are <code>0</code> (INFO), <code>1</code> (WARNING), <code>2</code> (ERROR), <code>3</code> (FATAL). It is recommended to set it to <code>0</code> during debugging and <code>1</code> in a production environment. If it is set to <code>4</code> , Nebula Graph will not print any logs.
<code>v</code>	<code>0</code>	Specifies the detailed level of the log. The larger the value, the more detailed the log is. Optional values are <code>0</code> , <code>1</code> , <code>2</code> , <code>3</code> .
<code>logbufsecs</code>	<code>0</code>	Specifies the maximum time to buffer the logs. If there is a timeout, it will output the buffered log to the log file. <code>0</code> means real-time output. This configuration is measured in seconds.
<code>redirect_stdout</code>	<code>true</code>	When set to <code>true</code> , the process redirects the <code>stdout</code> and <code>stderr</code> to separate output files.
<code>stdout_log_file</code>	<code>graphd-stdout.log</code>	Specifies the filename for the <code>stdout</code> log.
<code>stderr_log_file</code>	<code>graphd-stderr.log</code>	Specifies the filename for the <code>stderr</code> log.
<code>stderrthreshold</code>	<code>2</code>	Specifies the <code>minloglevel</code> to be copied to the <code>stderr</code> log.
<code>timestamp_in_logfile_name</code>	<code>true</code>	Specifies if the log file name contains a timestamp. <code>true</code> indicates yes, <code>false</code> indicates no.

Networking configurations

Name	Predefined value	Description
<code>meta_server_addrs</code>	<code>127.0.0.1:9559</code>	Specifies the IP addresses and ports of all Meta Services. Multiple addresses are separated with commas.
<code>local_ip</code>	<code>127.0.0.1</code>	Specifies the local IP for the Storage Service. The local IP address is used to identify the nebula-storaged process. If it is a distributed cluster or requires remote access, modify it to the corresponding address.
<code>port</code>	<code>9779</code>	Specifies RPC daemon listening port of the Storage service. The external port for the Meta Service is predefined to <code>9779</code> . The internal port is predefined to <code>9777</code> , <code>9778</code> , and <code>9780</code> . Nebula Graph uses the internal port for multi-replica interactions.
<code>ws_ip</code>	<code>0.0.0.0</code>	Specifies the IP address for the HTTP service.
<code>ws_http_port</code>	<code>19779</code>	Specifies the port for the HTTP service.
<code>ws_h2_port</code>	<code>19780</code>	Specifies the port for the HTTP2 service.
<code>heartbeat_interval_secs</code>	<code>10</code>	Specifies the default heartbeat interval. Make sure the <code>heartbeat_interval_secs</code> values for all services are the same, otherwise Nebula Graph CANNOT work normally. This configuration is measured in seconds.

Caution

The real IP address must be used in the configuration file. Otherwise, `127.0.0.1/0.0.0.0` cannot be parsed correctly in some cases.

Raft configurations

Name	Predefined value	Description
<code>raft_heartbeat_interval_secs</code>	<code>30</code>	Specifies the time to expire the Raft election. The configuration is measured in seconds.
<code>raft_rpc_timeout_ms</code>	<code>500</code>	Specifies the time to expire the Raft RPC. The configuration is measured in milliseconds.
<code>wal_ttl</code>	<code>14400</code>	Specifies the lifetime of the RAFT WAL. The configuration is measured in seconds.

Disk configurations

Name	Predefined value	Description
<code>data_path</code>	<code>data/storage</code>	Specifies the data storage path. Multiple paths are separated with <code>:</code> . The RocksDB example corresponds to one path.
<code>minimum_reserved_bytes</code>	<code>268435456</code>	Specifies the minimum remaining space of each data storage path. When lower than this standard, the cluster data writing may fail. This configuration is measured in bytes.
<code>rocksdb_batch_size</code>	<code>4096</code>	Specifies the block cache for a batch operation. The configuration is measured in bytes.
<code>rocksdb_block_cache</code>	<code>4</code>	Specifies the block cache for BlockBasedTable. The configuration is measured in megabytes.
<code>engine_type</code>	<code>rocksdb</code>	Specifies the engine type.
<code>rocksdb_compression</code>	<code>lz4</code>	Specifies the compression algorithm for RocksDB. Optional values are <code>lz4</code> , <code>lz4hc</code> , <code>zlib</code> , <code>bzip2</code> , and <code>zstd</code> .
<code>rocksdb_compression_per_level</code>	<code>\</code>	Specifies the compression algorithm for each level.
<code>enable_rocksdb_statistics</code>	<code>false</code>	When set to <code>false</code> , RocksDB statistics is disabled.
<code>rocksdb_stats_level</code>	<code>kExceptHistogramOrTimers</code>	Specifies the stats level for RocksDB. Optional values are <code>kExceptHistogramOrTimers</code> , <code>kExceptTimers</code> , <code>kExceptDetailedTimers</code> , <code>kExceptTimeForMutex</code> , and <code>kAll</code> .
<code>enable_rocksdb_prefix_filtering</code>	<code>true</code>	When set to <code>true</code> , the prefix bloom filter for RocksDB is enabled. Enabling the filter makes the graph traversal faster but occupies more memory.
<code>enable_rocksdb_whole_key_filtering</code>	<code>false</code>	When set to <code>true</code> , the whole key bloom filter for RocksDB is enabled.
<code>rocksdb_filtering_prefix_length</code>	<code>12</code>	Specifies the prefix length for each key. Optional values are <code>12</code> and <code>24</code> . The configuration is measured in bytes.
<code>enable_partitioned_index_filter</code>	<code>-</code>	When set to <code>true</code> , it reduces the amount of memory used by the bloom filter. In some random-seek situations, it may reduce the read performance.

Key-Value separation configurations

Name	Predefined value	Description
<code>rocksdb_enable_kv_separation</code>	<code>false</code>	Whether or not to enable BlobDB (RocksDB key-value separation support). This function improves query performance.
<code>rocksdb_kv_separation_threshold</code>	<code>100</code>	RocksDB key value separation threshold. Values at or above this threshold will be written to blob files during flush or compaction. Unit: bytes.
<code>rocksdb_blob_compression</code>	<code>lz4</code>	Compression algorithm for BlobDB. Optional values are <code>no</code> , <code>snappy</code> , <code>lz4</code> , <code>lz4hc</code> , <code>zlib</code> , <code>bzip2</code> , and <code>zstd</code> .
<code>rocksdb_enable_blob_garbage_collection</code>	<code>true</code>	Whether to perform BlobDB garbage collection during compaction.

misc configurations

Caution

The configuration `snapshot` in the following table is different from the snapshot in Nebula Graph. The `snapshot` here refers to the stock data on the leader when synchronizing Raft.

Name	Predefined value	Description
<code>snapshot_part_rate_limit</code>	<code>8388608</code>	The rate limit when the Raft leader synchronizes the stock data with other members of the Raft group. Unit: bytes/s.
<code>snapshot_batch_size</code>	<code>1048576</code>	The amount of data sent in each batch when the Raft leader synchronizes the stock data with other members of the Raft group. Unit: bytes.
<code>rebuild_index_part_rate_limit</code>	<code>4194304</code>	The rate limit when the Raft leader synchronizes the index data rate with other members of the Raft group during the index rebuilding process. Unit: bytes/s.
<code>rebuild_index_batch_size</code>	<code>1048576</code>	The amount of data sent in each batch when the Raft leader synchronizes the index data with other members of the Raft group during the index rebuilding process. Unit: bytes.

RocksDB options

Name	Predefined value	Description
<code>rocksdb_db_options</code>	<code>{}</code>	Specifies the RocksDB database options.
<code>rocksdb_column_family_options</code>	<code>{"write_buffer_size": "67108864", "max_write_buffer_number": "4", "max_bytes_for_level_base": "268435456"}</code>	Specifies the RocksDB column family options.
<code>rocksdb_block_based_table_options</code>	<code>{"block_size": "8192"}</code>	Specifies the RocksDB block based table options.

The format of the RocksDB option is `{"<option_name>": "<option_value>"}`. Multiple options are separated with commas.

Supported options of `rocksdb_db_options` and `rocksdb_column_family_options` are listed as follows.

- `rocksdb_db_options`

```
max_total_wal_size
delete_obsolete_files_period_micros
max_background_jobs
stats_dump_period_sec
compaction_readahead_size
writable_file_max_buffer_size
bytes_per_sync
wal_bytes_per_sync
delayed_write_rate
avoid_flush_during_shutdown
max_open_files
stats_persist_period_sec
stats_history_buffer_size
strict_bytes_per_sync
enable_rocksdb_prefix_filtering
enable_rocksdb_whole_key_filtering
rocksdb_filtering_prefix_length
num_compaction_threads
rate_limit
```

- `rocksdb_column_family_options`

```
write_buffer_size
max_write_buffer_number
level0_file_num_compaction_trigger
level0_slowdown_writes_trigger
level0_stop_writes_trigger
target_file_size_base
target_file_size_multiplier
max_bytes_for_level_base
max_bytes_for_level_multiplier
disable_auto_compactions
```

For more information, see [RocksDB official documentation](#).

For super-Large vertices

When the query starting from each vertex gets an edge, truncate it directly to avoid too many neighboring edges on the super-large vertex, because a single query occupies too much hard disk and memory. Or you can truncate a certain number of edges specified in the `Max_edge_returned_per_vertex` parameter. Excess edges will not be returned. This parameter applies to all spaces.

Property name	Default value	Description
<code>max_edge_returned_per_vertex</code>	2147483647	Specifies the maximum number of edges returned for each dense vertex. Excess edges are truncated and not returned. This parameter is not predefined in the configuration files.

Compatibility

The reservoir sampling algorithm in Nebula Graph 1.x is no longer supported in Nebula Graph 3.0.0.

Storage configurations for large dataset

When you have a large dataset (in the RocksDB directory) and your memory is tight, we suggest that you set the `enable_partitioned_index_filter` parameter to `true`. The performance is affected because RocksDB indexes are cached.

Last update: January 19, 2022

6.1.5 Kernel configurations

This topic introduces the Kernel configurations in Nebula Graph.

Resource control

ULIMIT PRECAUTIONS

The `ulimit` command specifies the resource threshold for the current shell session. The precautions are as follows:

- The changes made by `ulimit` only take effect for the current session or child process.
- The resource threshold (soft threshold) cannot exceed the hard threshold.
- Common users cannot use commands to adjust the hard threshold, even with `sudo`.
- To modify the system level or adjust the hard threshold, edit the file `/etc/security/limits.conf`. This method requires re-login to take effect.

ULIMIT -C

`ulimit -c` limits the size of the core dumps. We recommend that you set it to `unlimited`. The command is:

```
ulimit -c unlimited
```

ULIMIT -N

`ulimit -n` limits the number of open files. We recommend that you set it to more than 100,000. For example:

```
ulimit -n 130000
```

Memory

VM.SWAPPINESS

`vm.swappiness` specifies the percentage of the available memory before starting swap. The greater the value, the more likely the swap occurs. We recommend that you set it to 0. When set to 0, the page cache is removed first. Note that when `vm.swappiness` is 0, it does not mean that there is no swap.

VM.MIN_FREE_KBYTES

`vm.min_free_kbytes` specifies the minimum number of kilobytes available kept by Linux VM. If you have a large system memory, we recommend that you increase this value. For example, if your physical memory is 128GB, set it to 5GB. If the value is not big enough, the system cannot apply for enough continuous physical memory.

VM.MAX_MAP_COUNT

`vm.max_map_count` limits the maximum number of vma (virtual memory area) for a process. The default value is `65530`. It is enough for most applications. If your memory application fails because the memory consumption is large, increase the `vm.max_map_count` value.

VM.DIRTY_*

These values control the dirty data cache for the system. For write-intensive scenarios, you can make adjustments based on your needs (throughput priority or delay priority). We recommend that you use the system default value.

TRANSPARENT HUGE PAGE

For better delay performance, you must disable the transparent huge pages (THP). The command is:

```
root# echo never > /sys/kernel/mm/transparent_hugepage/enabled
root# echo never > /sys/kernel/mm/transparent_hugepage/defrag
root# swaponoff -a && swapon -a
```

Networking

NET.IPV4.TCP_SLOW_START_AFTER_IDLE

The default value of `net.ipv4.tcp_slow_start_after_idle` is `1`. If set, the congestion window is timed out after an idle period. We recommend that you set it to `0`, especially for long fat scenarios (high latency and large bandwidth).

NET.CORE.SOMAXCONN

`net.core.somaxconn` specifies the maximum number of connection queues listened by the socket. The default value is `128`. For scenarios with a large number of burst connections, we recommend that you set it to greater than `1024`.

NET.IPV4.TCP_MAX_SYN_BACKLOG

`net.ipv4.tcp_max_syn_backlog` specifies the maximum number of TCP connections in the SYN_RECV (semi-connected) state. The setting rule for this parameter is the same as that of `net.core.somaxconn`.

NET.CORE.NETDEV_MAX_BACKLOG

`net.core.netdev_max_backlog` specifies the maximum number of packets. The default value is `1000`. We recommend that you increase it to greater than `10,000`, especially for 10G network adapters.

NET.IPV4.TCP_KEEPAIVE_*

These values keep parameters alive for TCP connections. For applications that use a 4-layer transparent load balancer, if the idle connection is disconnected unexpectedly, decrease the values of `tcp_keepalive_time` and `tcp_keepalive_intvl`.

NET.IPV4.TCP_RMEMWMEM

`net.ipv4.tcp_wmem/rmem` specifies the minimum, default, and maximum size of the buffer pool sent/received by the TCP socket. For long fat links, we recommend that you increase the default value to `bandwidth (GB) * RTT (ms)`.

SCHEDULER

For SSD devices, we recommend that you set `scheduler` to `noop` or `none`. The path is `/sys/block/DEV_NAME/queue/scheduler`.

Other parameters

KERNEL.CORE_PATTERN

we recommend that you set it to `core` and set `kernel.core_uses_pid` to `1`.

Modify parameters

SYSCTL

- `sysctl <conf_name>`

Checks the current parameter value.

- `sysctl -w <conf_name>=<value>`

Modifies the parameter value. The modification takes effect immediately. The original value is restored after restarting.

- `sysctl -p [<file_path>]`

Loads Linux parameter values from the specified configuration file. The default path is `/etc/sysctl.conf`.

PRLIMIT

The `prlimit` command gets and sets process resource limits. You can modify the hard threshold by using it and the `sudo` command. For example, `prlimit --nofile = 130000 --pid = $$` adjusts the maximum number of open files permitted by the current process to `14000`. And the modification takes effect immediately. Note that this command is only available in RedHat 7u or higher versions.

Last update: January 14, 2022

6.2 Log management

6.2.1 Logs

Nebula Graph uses `glog` to print logs, uses `gflags` to control the severity level of the log, and provides an HTTP interface to dynamically change the log level at runtime to facilitate tracking.

Log directory

The default log directory is `/usr/local/nebula/logs/`.

If the log directory is deleted while Nebula Graph is running, the log would not continue to be printed. However, this operation will not affect the services. To recover the logs, restart the services.

Parameter descriptions

- `minloglevel`: Specifies the minimum level of the log. That is, no logs below this level will be printed. Optional values are `0` (INFO), `1` (WARNING), `2` (ERROR), `3` (FATAL). It is recommended to set it to `0` during debugging and `1` in a production environment. If it is set to `4`, Nebula Graph will not print any logs.
- `v`: Specifies the detailed level of the log. The larger the value, the more detailed the log is. Optional values are `0`, `1`, `2`, `3`.

The default severity level for the metad, graphd, and storaged logs can be found in their respective configuration files. The default path is `/usr/local/nebula/etc/`.

Check the severity level

Check all the flag values (log values included) of the current `gflags` with the following command.

```
$ curl <ws_ip>:<ws_port>/flags
```

Parameter	Description
<code>ws_ip</code>	The IP address for the HTTP service, which can be found in the configuration files above. The default value is <code>127.0.0.1</code> .
<code>ws_port</code>	The port for the HTTP service, which can be found in the configuration files above. The default values are <code>19559</code> (Meta), <code>19669</code> (Graph), and <code>19779</code> (Storage) respectively.

Examples are as follows:

- Check the current `minloglevel` in the Meta service:

```
$ curl 127.0.0.1:19559/flags | grep 'minloglevel'
```

- Check the current `v` in the Storage service:

```
$ curl 127.0.0.1:19779/flags | grep -w 'v'
```

Change the severity level

Change the severity level of the log with the following command.

```
$ curl -X PUT -H "Content-Type: application/json" -d '{"<key>":<value>[,<key>:<value>]}' "<ws_ip>:<ws_port>/flags"
```

Parameter	Description
key	The type of the log to be changed. For optional values, see Parameter descriptions .
value	The level of the log. For optional values, see Parameter descriptions .
ws_ip	The IP address for the HTTP service, which can be found in the configuration files above. The default value is 127.0.0.1.
ws_port	The port for the HTTP service, which can be found in the configuration files above. The default values are 19559 (Meta), 19669 (Graph), and 19779 (Storage) respectively.

Examples are as follows:

```
$ curl -X PUT -H "Content-Type: application/json" -d '{"minloglevel":0,"v":3}' "127.0.0.1:19779/flags" # stored
$ curl -X PUT -H "Content-Type: application/json" -d '{"minloglevel":0,"v":3}' "127.0.0.1:19669/flags" # graphd
$ curl -X PUT -H "Content-Type: application/json" -d '{"minloglevel":0,"v":3}' "127.0.0.1:19559/flags" # metad
```

If the log level is changed while Nebula Graph is running, it will be restored to the level set in the configuration file after restarting the service. To permanently modify it, see [Configuration files](#).

RocksDB logs

RocksDB logs are usually used to debug RocksDB parameters and stored in `/usr/local/nebula/data/storage/nebula/$id/data/LOG`. `$id` is the ID of the example.

Last update: January 18, 2022

7. Monitor and metrics

7.1 Query Nebula Graph metrics

Nebula Graph supports querying the monitoring metrics through HTTP ports.

7.1.1 Metrics

Each metric of Nebula Graph consists of three fields: name, type, and time range. The fields are separated by periods, for example, `num_queries.sum.600`. Different Nebula Graph services (Graph, Storage, or Meta) support different metrics. The detailed description is as follows.

Field	Example	Description
Metric name	<code>num_queries</code>	Indicates the function of the metric.
Metric type	<code>sum</code>	Indicates how the metrics are collected. Supported types are SUM, COUNT, AVG, RATE, and the P-th sample quantiles such as P75, P95, P99, and P99.9.
Time range	<code>600</code>	The time range in seconds for the metric collection. Supported values are 5, 60, 600, and 3600, representing the last 5 seconds, 1 minute, 10 minutes, and 1 hour.

Space-level metrics

The Graph service supports a set of space-level metrics that record the information of different graph spaces separately.

The name of space-level metrics contains the corresponding graph space name in the form of `{space=space_name}`, for example, `query_latency_us{space=basketballplayer}.avg.3600`.

To enable space-level metrics, set the value of `enable_space_level_metrics` to `true` in the Graph service configuration file before starting Nebula Graph. For details about how to modify the configuration, see [Configuration Management](#).

7.1.2 Query metrics over HTTP

Syntax

```
curl -G "http://<ip>:<port>/stats?stats=<metric_name_list> [&format=json]"
```

Parameter	Description
<code>ip</code>	The IP address of the server. You can find it in the configuration file in the installation directory.
<code>port</code>	The HTTP port of the server. You can find it in the configuration file in the installation directory. The default ports are 19559 (Meta), 19669 (Graph), and 19779 (Storage).
<code>metric_name_list</code>	The metrics names. Multiple metrics are separated by commas (,).
<code>&format=json</code>	Optional. Returns the result in the JSON format.

Note

If Nebula Graph is deployed with [Docker Compose](#), run `docker-compose ps` to check the ports that are mapped from the service ports inside of the container and then query through them.

Examples

- Query a single metric

Query the query number in the last 10 minutes in the Graph Service.

```
$ curl -G "http://192.168.8.40:19669/stats?stats=num_queries.sum.600"
num_queries.sum.600=400
```

- Query multiple metrics

Query the following metrics together:

- The average heartbeat latency in the last 1 minute.
- The average latency of the slowest 1% heartbeats, i.e., the P99 heartbeats, in the last 10 minutes.

```
$ curl -G "http://192.168.8.40:19559/stats?stats=heartbeat_latency_us.avg.60,heartbeat_latency_us.p99.600"
heartbeat_latency_us.avg.60=281
heartbeat_latency_us.p99.600=985
```

- Return a JSON result.

Query the number of new vertices in the Storage Service in the last 10 minutes and return the result in the JSON format.

```
$ curl -G "http://192.168.8.40:19779/stats?stats=num_add_vertices.sum.600&format=json"
[{"value":1,"name":"num_add_vertices.sum.600"}]
```

- Query all metrics in a service.

If no metric is specified in the query, Nebula Graph returns all metrics in the service.

```
$ curl -G "http://192.168.8.40:19559/stats"
heartbeat_latency_us.avg.5=304
heartbeat_latency_us.avg.60=308
heartbeat_latency_us.avg.600=299
heartbeat_latency_us.avg.3600=285
heartbeat_latency_us.p75.5=652
heartbeat_latency_us.p75.60=669
heartbeat_latency_us.p75.600=651
heartbeat_latency_us.p75.3600=642
heartbeat_latency_us.p95.5=930
heartbeat_latency_us.p95.60=963
heartbeat_latency_us.p95.600=933
heartbeat_latency_us.p95.3600=929
heartbeat_latency_us.p99.5=986
heartbeat_latency_us.p99.60=1409
heartbeat_latency_us.p99.600=989
heartbeat_latency_us.p99.3600=986
num_heartbeats.rate.5=0
num_heartbeats.rate.60=0
num_heartbeats.rate.600=0
num_heartbeats.rate.3600=0
num_heartbeats.sum.5=2
num_heartbeats.sum.60=40
num_heartbeats.sum.600=394
num_heartbeats.sum.3600=2364
```

Last update: January 14, 2022

7.2 RocksDB statistics

Nebula Graph uses RocksDB as the underlying storage. This topic describes how to collect and show the RocksDB statistics of Nebula Graph.

7.2.1 Enable RocksDB

By default, the function of RocksDB statistics is disabled. To enable RocksDB statistics, you need to:

1. Modify the `--enable_rocksdb_statistics` parameter as `true` in the `nebula-storaged.conf` file. The default path of the configuration file is `/use/local/nebula/etc`.
2. Restart the service to make the modification valid.

7.2.2 Get RocksDB statistics

Users can use the built-in HTTP service in the storage service to get the following types of statistics. Results in the JSON format are supported.

- All RocksDB statistics.
- Specified RocksDB statistics.

7.2.3 Examples

Use the following command to get all RocksDB statistics:

```
curl -L "http://${storage_ip}:${port}/rocksdb_stats"
```

For example:

```
curl -L "http://172.28.2.1:19779/rocksdb_stats"

rocksdb.blobdb.blob.file.bytes.read=0
rocksdb.blobdb.blob.file.bytes.written=0
rocksdb.blobdb.blob.file.bytes.synced=0
...
```

Use the following command to get specified RocksDB statistics:

```
curl -L "http://${storage_ip}:${port}/rocksdb_stats?stats=${stats_name}"
```

For example, use the following command to get the information of `rocksdb.bytes.read` and `rocksdb.block.cache.add`.

```
curl -L "http://172.28.2.1:19779/rocksdb_stats?stats=rocksdb.bytes.read,rocksdb.block.cache.add"

rocksdb.block.cache.add=14
rocksdb.bytes.read=1632
```

Use the following command to get specified RocksDB statistics in the JSON format:

```
curl -L "http://${storage_ip}:${port}/rocksdb_stats?stats=${stats_name}&format=json"
```

For example, use the following command to get the information of `rocksdb.bytes.read` and `rocksdb.block.cache.add` and return the results in the JSON format.

```
curl -L "http://172.28.2.1:19779/rocksdb_stats?stats=rocksdb.bytes.read,rocksdb.block.cache.add&format=json"

[
  {
    "rocksdb.block.cache.add": 1
  },
  {
    "rocksdb.bytes.read": 160
  }
]
```

Last update: January 14, 2022

8. Data security

8.1 Authentication and authorization

8.1.1 Authentication

Nebula Graph relies on local authentication or LDAP authentication to implement access control.

Nebula Graph creates a session when a client connects to it. The session stores information about the connection, including the user information. If the authentication system is enabled, the session will be mapped to corresponding users.

Note

By default, the authentication is disabled and Nebula Graph allows connections with the username `root` and any password.

Nebula Graph supports local authentication and LDAP authentication.

Local authentication

Local authentication indicates that usernames and passwords are stored locally on the server, with the passwords encrypted. Users will be authenticated when trying to visit Nebula Graph.

ENABLE LOCAL AUTHENTICATION

1. Modify the `nebula-graphd.conf` file (`/usr/local/nebula/etc/` is the default path) to set the following parameters:

- `--enable_authorize`: Set its value to `true` to enable authentication.
- `--failed_login_attempts`: This parameter is optional, and you need to add this parameter manually. Specify the attempts of continuously entering incorrect passwords for a single Graph service. When the number exceeds the limitation, your account will be locked. For multiple Graph services, the allowed attempts are `number of services * failed_login_attempts`.
- `--password_lock_time_in_secs`: This parameter is optional, and you need to add this parameter manually. Specify the time how long your account is locked after multiple incorrect password entries are entered. Unit: second.

2. Restart the Nebula Graph services. For how to restart, see [Manage Nebula Graph services](#).

Note

You can use the username `root` and password `nebula` to log into Nebula Graph after enabling local authentication. This account has the build-in God role. For more information about roles, see [Roles and privileges](#).

LDAP authentication

Lightweight Directory Access Protocol (LDAP) is a lightweight client-server protocol for accessing directories and building a centralized account management system. LDAP authentication and local authentication can be enabled at the same time, but LDAP authentication has a higher priority. If the local authentication server and the LDAP server both have the information of user `Amber`, Nebula Graph reads from the LDAP server first.

ENABLE LDAP AUTHENTICATION

Enterpriseonly

Contact inquiry@vesoft.com.

Last update: February 8, 2022

8.1.2 User management

User management is an indispensable part of Nebula Graph access control. This topic describes how to manage users and roles.

After [enabling authentication](#), only valid users can connect to Nebula Graph and access the resources according to the [user roles](#).

Note

- By default, the authentication is disabled. Nebula Graph allows connections with the username `root` and any password.
- Once the role of a user is modified, the user has to re-login to make the new role takes effect.

CREATE USER

The `root` user with the **GOD** role can run `CREATE USER` to create a new user.

- Syntax

```
CREATE USER [IF NOT EXISTS] <user_name> [WITH PASSWORD '<password>'];
```

- Example

```
nebula> CREATE USER user1 WITH PASSWORD 'nebula';
```

GRANT ROLE

Users with the **GOD** role or the **ADMIN** role can run `GRANT ROLE` to assign a built-in role in a graph space to a user. For more information about Nebula Graph built-in roles, see [Roles and privileges](#).

- Syntax

```
GRANT ROLE <role_type> ON <space_name> TO <user_name>;
```

- Example

```
nebula> GRANT ROLE USER ON basketballplayer TO user1;
```

REVOKE ROLE

Users with the **GOD** role or the **ADMIN** role can run `REVOKE ROLE` to revoke the built-in role of a user in a graph space. For more information about Nebula Graph built-in roles, see [Roles and privileges](#).

- Syntax

```
REVOKE ROLE <role_type> ON <space_name> FROM <user_name>;
```

- Example

```
nebula> REVOKE ROLE USER ON basketballplayer FROM user1;
```

DESCRIBE USER

Users can run `DESCRIBE USER` to list the roles for a specified user.

- Syntax

```
DESCRIBE USER <user_name>;
DESC USER <user_name>;
```

- Example

```
nebula> DESCRIBE USER user1;
+-----+-----+
| role   | space |
+-----+-----+
| "ADMIN" | "basketballplayer" |
+-----+-----+
```

SHOW ROLES

Users can run `SHOW ROLES` to list the roles in a graph space.

- Syntax

```
SHOW ROLES IN <space_name>;
```

- Example

```
nebula> SHOW ROLES IN basketballplayer;
+-----+-----+
| Account | Role Type |
+-----+-----+
| "user1" | "ADMIN"   |
+-----+-----+
```

CHANGE PASSWORD

Users can run `CHANGE PASSWORD` to set a new password for a user. The old password is needed when setting a new one.

- Syntax

```
CHANGE PASSWORD <user_name> FROM '<old_password>' TO '<new_password>';
```

- Example

```
nebula> CHANGE PASSWORD user1 FROM 'nebula' TO 'nebula123';
```

ALTER USER

The `root` user with the **GOD** role can run `ALTER USER` to set a new password for a user. The old password is not needed when setting a new one.

- Syntax

```
ALTER USER <user_name> WITH PASSWORD '<password>';
```

- Example

```
nebula> ALTER USER user1 WITH PASSWORD 'nebula';
```

DROP USER

The `root` user with the **GOD** role can run `DROP USER` to remove a user.

Note

Removing a user does not close the current session of the user, and the user role still takes effect in the session until the session is closed.

- Syntax

```
DROP USER [IF EXISTS] <user_name>;
```

- Example

```
nebula> DROP USER user1;
```

SHOW USERS

The `root` user with the **GOD** role can run `SHOW USERS` to list all the users.

- Syntax

```
SHOW USERS;
```

- Example

```
nebula> SHOW USERS;
+-----+
| Account |
+-----+
| "test1" |
| "test2" |
| "test3" |
+-----+
```

Last update: January 14, 2022

8.1.3 Roles and privileges

A role is a collection of privileges. You can assign a role to a [user](#) for access control.

Built-in roles

Nebula Graph does not support custom roles, but it has multiple built-in roles:

- GOD
- GOD is the original role with **all privileges** not limited to graph spaces. It is similar to `root` in Linux and `administrator` in Windows.
- When the Meta Service is initialized, the one and only GOD role user `root` is automatically created with the password `nebula`.

Caution

Modify the password for `root` timely for security.

- One cluster can only have one user with the GOD role. This user can manage all graph spaces in a cluster.
- Manual authorization of the God role is not supported. Only the `root` user with the default God role can be used.
- ADMIN
- An ADMIN role can **read and write** both the Schema and the data in a specific graph space.
- An ADMIN role of a graph space can grant DBA, USER, and GUEST roles in the graph space to other users.

Note

Only roles lower than ADMIN can be authorized to other users.





- DBA
- A DBA role can **read and write** both the Schema and the data in a specific graph space.
- A DBA role of a graph space CANNOT grant roles to other users.
- USER
- A USER role can **read and write** data in a specific graph space.
- The Schema information is **read-only** to the USER roles in a graph space.
- GUEST
- A GUEST role can **only read** the Schema and the data in a specific graph space.

Note

- Nebula Graph does not support custom roles. Users can only use the default built-in roles.
- A user can have only one role in a graph space. For authenticated users, see [User management](#).

Role privileges and allowed nGQL

The privileges of roles and the nGQL statements that each role can use are listed as follows.

Privilege	God	Admin	DBA	User	Guest	Allowed nGQL
Read space	Y	Y	Y	Y	Y	USE , DESCRIBE SPACE
Read schema	Y	Y	Y	Y	Y	DESCRIBE TAG , DESCRIBE EDGE , DESCRIBE TAG INDEX , DESCRIBE EDGE INDEX
Write schema	Y	Y	Y			CREATE TAG , ALTER TAG , CREATE EDGE , ALTER EDGE , DROP TAG , DELETE TAG , DROP EDGE , CREATE TAG INDEX , CREATE EDGE INDEX , DROP TAG INDEX , DROP EDGE INDEX
Write user	Y					CREATE USER , DROP USER , ALTER USER
Write role	Y	Y				GRANT , REVOKE
Read data	Y	Y	Y	Y	Y	GO , SET , PIPE , MATCH , ASSIGNMENT , LOOKUP , YIELD , ORDER BY , FETCH VERTICES , Find , FETCH EDGES , FIND PATH , LIMIT , GROUP BY , RETURN
Write data	Y	Y	Y	Y		INSERT VERTEX , UPDATE VERTEX , INSERT EDGE , UPDATE EDGE , DELETE VERTEX , DELETE EDGES , DELETE TAG
Show operations	Y	Y	Y	Y	Y	SHOW , CHANGE PASSWORD
Job	Y	Y	Y	Y		SUBMIT JOB COMPACT  SUBMIT JOB FLUSH  SUBMIT JOB STATS  STOP JOB  RECOVER JOB
Write space	Y					CREATE SPACE , DROP SPACE , CREATE SNAPSHOT , DROP SNAPSHOT , BALANCE , ADMIN , CONFIG , INGEST , DOWNLOAD , BUILD TAG INDEX , BUILD EDGE INDEX

Caution

- The results of `SHOW` operations are limited to the role of a user. For example, all users can run `SHOW SPACES` , but the results only include the graph spaces that the users have privileges.
- Only the GOD role can run `SHOW USERS` and `SHOW SNAPSHOTS` .

Last update: January 20, 2022

8.1.4 OpenLDAP authentication

This topic introduces how to connect Nebula Graph to the OpenLDAP server and use the DN (Distinguished Name) and password defined in OpenLDAP for authentication.

Enterpriseonly

This feature is supported by the Enterprise Edition only.

Authentication method

After the OpenLDAP authentication is enabled and users log into Nebula Graph with the account and password, Nebula Graph checks whether the login account exists in the Meta service. If the account exists, Nebula Graph finds the corresponding DN in OpenLDAP according to the authentication method and verifies the password.

OpenLDAP supports two authentication methods: simple bind authentication (SimpleBindAuth) and search bind authentication (SearchBindAuth).

SIMPLEBINDAUTH

Simple bind authentication splices the login account and the configuration information of Graph services into a DN that can be recognized by OpenLDAP, and then authenticates on OpenLDAP based on the DN and password.

SEARCHBINDAUTH

Search bind authentication reads the Graph service configuration information and queries whether the `uid` in the configuration matches the login account. If they match, search bind authentication reads the DN, and then uses the DN and password to verify on OpenLDAP.

Prerequisites

- **OpenLDAP** is installed.
- The account and password are imported on OpenLDAP.
- The server where OpenLDAP is located has opened the corresponding authentication port.

Procedures

Take the existing account `test2` and password `passwdtest2` on OpenLDAP as an example.

1. Connect to Nebula Graph, create and authorize the shadow account `test2` corresponding to OpenLDAP.

```
nebula> CREATE USER test2 WITH PASSWORD '';
nebula> GRANT ROLE ADMIN ON basketballplayer TO test2;
```

!!! note

When creating an account in Nebula Graph, the password can be set arbitrarily.

2. Edit the configuration file `nebula-graphd.conf` (The default path is `/usr/local/nebula/etc/`):

- SimpleBindAuth (Recommended)

```
# Whether to get the configuration information from the configuration file.
--local_config=true
# Whether to enable authentication.
--enable_authorize=true
# Authentication methods include password, ldap, and cloud.
--auth_type=ldap
# The address of the OpenLDAP server.
--ldap_server=192.168.8.211
# The port of the OpenLDAP server.
--ldap_port=389
# The name of the Schema in OpenLDAP.
--ldap_scheme=ldap
# The prefix of DN.
--ldap_prefix=uid=
# The suffix of DN.
--ldap_suffix=,ou=it,dc=sys,dc=com
```

- SearchBindAuth

```
# Whether to get the configuration information from the configuration file.
--local_config=true
# Whether to enable authentication.
--enable_authorize=true
# Authentication methods include password, ldap, and cloud.
--auth_type=ldap
# The address of the OpenLDAP server.
--ldap_server=192.168.8.211
# The port of the OpenLDAP server.
--ldap_port=389
# The name of the Schema in OpenLDAP.
--ldap_scheme=ldap
# The DN that binds the target.
--ldap_basedn=ou=it,dc=sys,dc=com
```

3. Restart Nebula Graph services to make the new configuration valid.

4. Run the login test.

```
$ ./nebula-console --addr 127.0.0.1 --port 9669 -u test2 -p passwdtest2
2021/09/08 03:49:39 [INFO] connection pool is initialized successfully

Welcome to Nebula Graph!
```

!!! note

After using OpenLDAP for authentication, local users (including ``root``) cannot log in normally.

Last update: January 14, 2022

8.2 Backup & Restore

8.2.1 What is Backup & Restore

Backup & Restore (BR for short) is a Command-Line Interface (CLI) tool to back up data of graph spaces of Nebula Graph and to restore data from the backup files.

Features

The BR has the following features. It supports:

- Backing up and restoring data in a one-click operation.
- Restoring data in the following backup file types:
 - Local Disk (SSD or HDD). It is recommend to use local disk in test environment only.
 - Amazon S3 compatible interface, such as Alibaba Cloud OSS, MinIO, Ceph RGW, etc.
- Backing up and restoring the entire Nebula Graph cluster.
- Backing up data of specified graph spaces (experimental).

Limitations

- Supports Nebula Graph v3.0.0 only.
- Supports full backup, but not incremental backup.
- Currently, Nebula Listener and full-text indexes do not support backup.
- If you back up data to the local disk, the backup files will be saved in the local path of each server. You can also mount the NFS on your host to restore the backup data to a different host.
- The backup graph space can be restored to the original cluster only. Cross clusters restoration is not supported.
- During the backup process, both DDL and DML statements in the specified graph spaces are blocked. We recommend that you do the operation within the low peak period of the business, for example, from 2:00 AM to 5:00 AM.
- Supports restoration of data on clusters of the same topologies only, which means both clusters must have exactly the same number of hosts.
- We recommend that you restore the data OFFLINE because it requires removing the data and restart the service.
- If you backup data of a specified graph space in cluster A, the backup files CAN NOT be restored to cluster B. Restore specified graph space will delete all other graph space in the cluster. (experimental).

How to use BR

To use the BR, follow these steps:

1. [Compile BR](#).
2. [Use BR to back up data](#).
3. [Use BR to restore data from backup files](#).

Last update: February 15, 2022

8.2.2 Compile BR

For now, the BR is not provided as a package. You need to compile the BR first.

Prerequisites

To compile the BR, do a check of these:

- Go 1.14.x or a later version is installed.
- make is installed.

Procedures

To compile the BR, follow these steps:

1. Clone the `nebula-br` repository to your machine.

```
git clone https://github.com/vesoft-inc/nebula-br.git
```

2. Change to the `br` directory.

```
cd nebula-br
```

3. Compile the BR.

```
make
```

Users can enter `bin/br version` on the command line. If the following results are returned, the BR is compiled successfully.

```
[nebula-br]$ bin/br version  
Nebula Backup And Restore Utility Tool,V-0.6.0
```

Last update: February 16, 2022

8.2.3 Use BR to back up data

After the BR is compiled, you can back up data of the entire graph space. This topic introduces how to use the BR to back up data.

Prerequisites

To back up data with the BR, do a check of these:

- The BR is compiled. For more information, see [Compile BR](#).
- The Nebula Graph services are running.
- The `nebula-agent` has been downloaded and the `nebula-agent` service is running on each host in the cluster.
- If you store the backup files locally, create a directory with the same absolute path on the meta servers, the storage servers, and the BR machine for the backup files and get the absolute path. Make sure the account has write privileges for this directory.

Note

In the production environment, we recommend that you mount Network File System (NFS) storage to the meta servers, the storage servers, and the BR machine for local backup, or use Amazon S3 or Alibaba Cloud OSS for remote backup. When you restore the data from local files, you must manually move these backup files to a specified directory, which causes redundant data and troubles. For more information, see [Restore data from backup files](#).

Procedure

Run the following command to perform a full backup for the entire cluster.

Note

Make sure that the local path where the backup file is stored exists.

```
$ ./bin/br backup full --meta <ip_address> --storage <storage_path>
```

For example:

- Run the following command to perform a full backup for the entire cluster whose meta service address is `127.0.0.1:9559`, and save the backup file to `/home/nebula/backup/`.

Caution

If there are multiple meta addresses, you can use any one of them.

```
$ ./bin/br backup full --meta "127.0.0.1:9559" --storage "local:///home/nebula/backup/"
```

- Run the following command to perform a full backup for the entire cluster whose meta service address is `127.0.0.1:9559`, and save the backup file to `backup` in the `br-test` bucket of the object storage service compatible with S3 protocol.

```
$ ./bin/br backup full --meta "127.0.0.1:9559" --s3.endpoint "http://127.0.0.1:9000" --storage="s3://br-test/backup/" --s3.access_key=minioadmin --s3.secret_key=minioadmin --s3.region=default
```

The parameters are as follows.

Parameter	Data type	Required	Default value	Description
<code>-h, -help</code>	-	No	None	Checks help for restoration.
<code>-debug</code>	-	No	None	Checks for more log information.
<code>-log</code>	string	No	<code>"br.log"</code>	Specifies detailed log path for restoration and backup.
<code>-meta</code>	string	Yes	None	The IP address and port of the meta service.
<code>-name</code>	string	Yes	None	The name of backup.
<code>--storage</code>	string	Yes	None	The target storage URL of BR backup data. The format is: \<Schema>://\<PATH>. Schema: Optional values are <code>local</code> and <code>s3</code> . When selecting <code>s3</code> , you need to fill in <code>s3.access_key</code> , <code>s3.endpoint</code> , <code>s3.region</code> , and <code>s3.secret_key</code> . PATH: The path of the storage location.
<code>--s3.access_key</code>	string	No	None	Sets AccessKey ID.
<code>--s3.endpoint</code>	string	No	None	Sets the S3 endpoint URL, please specify the HTTP or HTTPS scheme explicitly.
<code>--s3.region</code>	string	No	None	Sets the region or location to upload or download the backup.
<code>--s3.secret_key</code>	string	No	None	Sets SecretKey for AccessKey ID.

Next to do

After the backup files are generated, you can use the BR to restore them for Nebula Graph. For more information, see [Use BR to restore data](#).

Last update: February 16, 2022

8.2.4 Use BR to restore data

If you use the BR to back up data, you can use it to restore the data to Nebula Graph. This topic introduces how to use the BR to restore data from backup files.

Caution

During the restoration process, the data on the target Nebula Graph cluster is removed and then is replaced with the data from the backup files. If necessary, back up the data on the target cluster.

Caution

The restoration process is performed OFFLINE.

Prerequisites

To restore data with the BR, do a check of these:

- The BR is compiled. For more information, see [Compile BR](#).
- Download `nebula-agent` and start the agent service in each cluster(including metad, storaged, graphd) host.
- No application is connected to the target Nebula Graph cluster.
- Make sure that the target and the source Nebula Graph clusters have the same topology, which means that they have exactly the same number of hosts. The number of data folders for each host is consistently distributed.

Procedures

1. Users can use the following command to list the existing backup information:

```
$ ./bin/br show --storage <ip_address>
```

For example, run the following command to list the backup information in the local `/home/nebula/backup` path.

```
$ ./bin/br show --storage "local:///home/nebula/backup"
+-----+-----+-----+-----+-----+
| NAME | CREATE TIME | SPACES | FULL BACKUP | ALL SPACES |
+-----+-----+-----+-----+-----+
| BACKUP_2022_02_10_07_40_41 | 2022-02-10 07:40:41 | basketballplayer | true | true |
| BACKUP_2022_02_11_08_26_43 | 2022-02-11 08:26:47 | basketballplayer,foesa | true | true |
+-----+-----+-----+-----+-----+
```

Or, you can run the following command to list the backup information stored in S3 URL `s3://127.0.0.1:9000/br-test/backup`.

```
$ ./bin/br show --s3.endpoint "http://127.0.0.1:9000" --storage="s3://br-test/backup/" --s3.access_key=minioadmin --s3.secret_key=minioadmin --s3.region=default
```

Parameter	Data type	Required	Default value	Description
<code>-h, -help</code>	-	No	None	Checks help for restoration.
<code>-debug</code>	-	No	None	Checks for more log information.
<code>-log</code>	string	No	<code>"br.log"</code>	Specifies detailed log path for restoration and backup.
<code>--storage</code>	string	Yes	None	The target storage URL of BR backup data. The format is: <Schema>://<PATH>. Schema: Optional values are <code>local</code> and <code>s3</code> . When selecting s3, you need to fill in <code>s3.access_key</code> , <code>s3.endpoint</code> , <code>s3.region</code> , and <code>s3.secret_key</code> . PATH: The path of the storage location.
<code>--s3.access_key</code>	string	No	None	Sets AccessKey ID.
<code>--s3.endpoint</code>	string	No	None	Sets the S3 endpoint URL, please specify the HTTP or HTTPS scheme explicitly.
<code>--s3.region</code>	string	No	None	Sets the region or location to upload or download the backup.
<code>--s3.secret_key</code>	string	No	None	Sets SecretKey for AccessKey ID.

2. Run the following command to restore data.

```
$ ./bin/br restore full --meta <ip_address> --storage <storage_path> --name <backup_name>
```

For example, run the following command to upload the backup files from the local `/home/nebula/backup/` to the cluster where the meta service's address is `127.0.0.1:9559`.

```
$ ./bin/br restore full --meta "127.0.0.1:9559" --storage "local:///home/nebula/backup/" --name BACKUP_2021_12_08_18_38_08
```

Or, you can run the following command to upload the backup files from the S3 URL `s3://127.0.0.1:9000/br-test/backup`.

```
$ ./bin/br restore full --meta "127.0.0.1:9559" --s3.endpoint "http://127.0.0.1:9000" --storage="s3://br-test/backup/" --s3.access_key=minioadmin --s3.secret_key=minioadmin --s3.region="default" --name BACKUP_2021_12_08_18_38_08
```

If the following information is returned, the data is restored successfully.

```
Restore succeed.
```

Caution

If your new cluster hosts' IPs are not all the same as the backup cluster, after restoration, you should run `add hosts` to add the Storage host IPs in the new cluster one by one.

The parameters are as follows.

Parameter	Data type	Required	Default value	Description
<code>-h, -help</code>	-	No	None	Checks help for restoration.
<code>-debug</code>	-	No	None	Checks for more log information.
<code>-log</code>	string	No	<code>"br.log"</code>	Specifies detailed log path for restoration and backup.
<code>-meta</code>	string	Yes	None	The IP address and port of the meta service.
<code>-name</code>	string	Yes	None	The name of backup.
<code>--storage</code>	string	Yes	None	The target storage URL of BR backup data. The format is: \<Schema>:/\<PATH>. Schema: Optional values are <code>local</code> and <code>s3</code> . When selecting <code>s3</code> , you need to fill in <code>s3.access_key</code> , <code>s3.endpoint</code> , <code>s3.region</code> , and <code>s3.secret_key</code> . PATH: The path of the storage location.
<code>--s3.access_key</code>	string	No	None	Sets AccessKey ID.
<code>--s3.endpoint</code>	string	No	None	Sets the S3 endpoint URL, please specify the HTTP or HTTPS scheme explicitly.
<code>--s3.region</code>	string	No	None	Sets the region or location to upload or download the backup.
<code>--s3.secret_key</code>	string	No	None	Sets SecretKey for AccessKey ID.

- Run the following command to clean up temporary files if any error occurred during backup. It will clean the files in cluster and external storage. You could also use it to clean up old backups files in external storage.

```
$ ./bin/br cleanup --meta <ip_address> --storage <storage_path> --name <backup_name>
```

The parameters are as follows.

Parameter	Data type	Required	Default value	Description
<code>-h, -help</code>	-	No	None	Checks help for restoration.
<code>-debug</code>	-	No	None	Checks for more log information.
<code>-log</code>	string	No	<code>"br.log"</code>	Specifies detailed log path for restoration and backup.
<code>-meta</code>	string	Yes	None	The IP address and port of the meta service.
<code>-name</code>	string	Yes	None	The name of backup.
<code>--storage</code>	string	Yes	None	The target storage URL of BR backup data. The format is: \<Schema>:/\<PATH>. Schema: Optional values are <code>local</code> and <code>s3</code> . When selecting <code>s3</code> , you need to fill in <code>s3.access_key</code> , <code>s3.endpoint</code> , <code>s3.region</code> , and <code>s3.secret_key</code> . PATH: The path of the storage location.
<code>--s3.access_key</code>	string	No	None	Sets AccessKey ID.
<code>--s3.endpoint</code>	string	No	None	Sets the S3 endpoint URL, please specify the HTTP or HTTPS scheme explicitly.
<code>--s3.region</code>	string	No	None	Sets the region or location to upload or download the backup.
<code>--s3.secret_key</code>	string	No	None	Sets SecretKey for AccessKey ID.

Last update: February 16, 2022

8.3 Backup and restore data with snapshots

Nebula Graph supports using snapshots to back up and restore data. When data loss or misoperation occurs, the data will be restored through the snapshot.

8.3.1 Prerequisites

Nebula Graph **authentication** is disabled by default. In this case, all users can use the snapshot feature.

If authentication is enabled, only the GOD role user can use the snapshot feature. For more information about roles, see [Roles and privileges](#).

8.3.2 Precautions

- To prevent data loss, create a snapshot as soon as the system structure changes, for example, after operations such as `ADD HOST`, `DROP HOST`, `CREATE SPACE`, `DROP SPACE`, and `BALANCE` are performed.
- Nebula Graph cannot automatically delete the invalid files created by a failed snapshot task. You have to manually delete them by using `DROP SNAPSHOT`.
- Customizing the storage path for snapshots is not supported for now. The default path is `/usr/local/nebula/data`.

8.3.3 Snapshot form and path

Nebula Graph snapshots are stored in the form of directories with names like `SNAPSHOT_2021_03_09_08_43_12`. The suffix `2021_03_09_08_43_12` is generated automatically based on the creation time (UTC).

When a snapshot is created, snapshot directories will be automatically created in the `checkpoints` directory on the leader Meta server and each Storage server.

To fast locate the path where the snapshots are stored, you can use the Linux command `find`. For example:

```
$ find |grep 'SNAPSHOT_2021_03_09_08_43_12'
./data/meta2/nebula/0/checkpoints/SNAPSHOT_2021_03_09_08_43_12
./data/meta2/nebula/0/checkpoints/SNAPSHOT_2021_03_09_08_43_12/data
./data/meta2/nebula/0/checkpoints/SNAPSHOT_2021_03_09_08_43_12/data/000081.sst
...
```

8.3.4 Create snapshots

Run `CREATE SNAPSHOT` to create a snapshot for all the graph spaces based on the current time for Nebula Graph. Creating a snapshot for a specific graph space is not supported yet.

Note

If the creation fails, **delete the snapshot** and try again.

```
nebula> CREATE SNAPSHOT;
```

8.3.5 View snapshots

To view all existing snapshots, run `SHOW SNAPSHOTS`.

```
nebula> SHOW SNAPSHOTS;
+-----+-----+-----+
| Name                               | Status | Hosts                               |
+-----+-----+-----+
| "SNAPSHOT_2021_03_09_08_43_12"    | "VALID" | "127.0.0.1:9779" |
| "SNAPSHOT_2021_03_09_09_10_52"    | "VALID" | "127.0.0.1:9779" |
+-----+-----+-----+
```


The parameters in the return information are described as follows.

Parameter	Description
<code>Name</code>	The name of the snapshot directory. The prefix <code>SNAPSHOT</code> indicates that the file is a snapshot file, and the suffix indicates the time the snapshot was created (UTC).
<code>Status</code>	The status of the snapshot. <code>VALID</code> indicates that the creation succeeded, while <code>INVALID</code> indicates that it failed.
<code>Hosts</code>	IP addresses and ports of all Storage servers at the time the snapshot was created.

8.3.6 Delete snapshots

To delete a snapshot with the given name, run `DROP SNAPSHOT`.

```
DROP SNAPSHOT <snapshot_name>;
```

Example:

```
nebula> DROP SNAPSHOT SNAPSHOT_2021_03_09_08_43_12;
nebula> SHOW SNAPSHOTS;
+-----+-----+-----+
| Name                | Status | Hosts                |
+-----+-----+-----+
| "SNAPSHOT_2021_03_09_09_10_52" | "VALID" | "127.0.0.1:9779" |
+-----+-----+-----+
```

8.3.7 Restore data with snapshots

Currently, there is no command to restore data with snapshots. You need to manually copy the snapshot file to the corresponding folder, or you can make it by using a shell script. The logic implements as follows:

1. After the snapshot is created, the `checkpoints` directory is generated in the installation directory of the leader Meta server and all Storage servers, and saves the created snapshot. Taking this topic as an example, when there are two graph spaces, the snapshots created are saved in `/usr/local/nebula/data/meta/nebula/0/checkpoints`, `/usr/local/nebula/data/storage/ nebula/3/checkpoints` and `/usr/local/nebula/data/storage/nebula/4/checkpoints`.

```
$ ls /usr/local/nebula/data/meta/nebula/0/checkpoints/
SNAPSHOT_2021_03_09_09_10_52
$ ls /usr/local/nebula/data/storage/nebula/3/checkpoints/
SNAPSHOT_2021_03_09_09_10_52
$ ls /usr/local/nebula/data/storage/nebula/4/checkpoints/
SNAPSHOT_2021_03_09_09_10_52
```

2. To restore the lost data through snapshots, you can take a snapshot at an appropriate time, copy the folders `data` and `wal` in the corresponding snapshot directory to its parent directory (at the same level with `checkpoints`) to overwrite the previous `data` and `wal`, and then restart the cluster.

Caution

The `data` and `wal` directories of all Meta servers should be overwritten at the same time. Otherwise, the new leader Meta server will use the latest Meta data after a cluster is restarted.

Last update: January 18, 2022

8.4 SSL encryption

Nebula Graph supports data transmission with SSL encryption between clients, the Graph service, the Meta service, and the Storage service. This topic describes how to enable SSL encryption.

8.4.1 Precaution

Enabling SSL encryption will slightly affect the performance, such as causing operation latency.

8.4.2 Parameters

Parameter	Default value	Description
<code>cert_path</code>	-	The path to the PEM certification.
<code>key_path</code>	-	The path to the key certification.
<code>password_path</code>	-	The path to the password file certification.
<code>ca_path</code>	-	The path to the trusted CA file.
<code>enable_ssl</code>	<code>false</code>	Whether to enable SSL encryption.
<code>enable_graph_ssl</code>	<code>false</code>	Whether to enable SSL encryption in the Graph service only.
<code>enable_meta_ssl</code>	<code>false</code>	Whether to enable SSL encryption in the Meta service only.

8.4.3 Certificate modes

To use SSL encryption, SSL certificates are required. Nebula Graph supports two certificate modes.

- Self-signed certificate mode

In this mode, users need to make the signed certificate by themselves and set `cert_path`, `key_path`, and `password_path` in the corresponding file according to encryption policies.

- CA-signed certificate mode

In this mode, users need to apply for the signed certificate from a certificate authority and set `cert_path`, `key_path`, and `password_path` in the corresponding file according to encryption policies.

8.4.4 Encryption policies

Nebula Graph supports three encryption policies. For details, see [Usage explanation](#).

- Encrypt the data transmission between clients, the Graph service, the Meta service, and the Storage service.

Add `enable_ssl = true` to the configuration files of `nebula-graphd.conf`, `nebula-metad.conf`, and `nebula-storaged.conf`.

- Encrypt the data transmission between clients and the Graph service.

This policy applies to the case that the clusters are set in the same server room. Only the port of the Graph service is open to the outside because other services can communicate over the internal network without encryption. Add `enable_graph_ssl = true` to the configuration file of `nebula-graphd.conf`.

- Encrypt the data transmission related to the Meta service in the cluster.

This policy applies to transporting classified information to the Meta service. Add `enable_meta_ssl = true` to the configuration files of `nebula-graphd.conf`, `nebula-metad.conf`, and `nebula-storaged.conf`.

8.4.5 Steps

1. Ensure the certificate mode and the encryption policy.
2. Add the certificate configuration and the policy configuration in corresponding files.

For example, the three configuration files need to be set as follows when using a self-signed certificate and encrypt data transmission between clients, the Graph service, the Meta service, and the Storage service.

```
--cert_path=xxxxxx  
--key_path=xxxxx  
--password_path=xxxxxx  
--enable_ssl=true
```

3. Set the SSL and the trusted CA in clients. For code examples, see [nebula-test-run.py](#).

Last update: January 14, 2022

9. Practices

9.1 Compaction

This topic gives some information about compaction.

In Nebula Graph, `Compaction` is the most important background process and has an important effect on performance.

`Compaction` reads the data that is written on the hard disk, then re-organizes the data structure and the indexes, and then writes back to the hard disk. The read performance can increase by times after compaction. Thus, to get high read performance, trigger `compaction` (full `compaction`) manually when writing a large amount of data into Nebula Graph.

Note

Note that `compaction` leads to long-time hard disk IO. We suggest that users do compaction during off-peak hours (for example, early morning).

Nebula Graph has two types of `compaction`: `automatic compaction` and `full compaction`.

9.1.1 Automatic `compaction`

Automatic `compaction` is automatically triggered when the system reads data, writes data, or the system restarts. The read performance can increase in a short time. Automatic `compaction` is enabled by default. But once triggered during peak hours, it can cause unexpected IO occupancy that has an unwanted effect on the performance.

9.1.2 Full `compaction`

Full `compaction` enables large-scale background operations for a graph space such as merging files, deleting the data expired by TTL. This operation needs to be initiated manually. Use the following statements to enable full `compaction`:

Note

We recommend you to do the full compaction during off-peak hours because full compaction has a lot of IO operations.

```
nebula> USE <your_graph_space>;
nebula> SUBMIT JOB COMPACT;
```

The preceding statement returns the job ID. To show the `compaction` progress, use the following statement:

```
nebula> SHOW JOB <job_id>;
```

9.1.3 Operation suggestions

These are some operation suggestions to keep Nebula Graph performing well.

- After data import is done, run `SUBMIT JOB COMPACT`.
- Run `SUBMIT JOB COMPACT` periodically during off-peak hours (e.g. early morning).
- To control the read and write traffic limitation for `compactions`, set the following parameter in the `nebula-storaged.conf` configuration file.

```
# Limit the read/write rate to 20MB/s.
--rocksdb_rate_limit=20 (in MB/s)
```

9.1.4 FAQ

"Where are the logs related to `Compaction` stored?"

By default, the logs are stored under the `LOG` file in the `/usr/local/nebula/data/storage/nebula/{1}/data/` directory, or similar to `LOG.old.1625797988509303`. You can find the following content.

```

** Compaction Stats [default] **
Level   Files   Size    Score Read(GB)  Rn(GB) Rnp1(GB) Write(GB) Wnew(GB) Moved(GB) W-Amp Rd(MB/s) Wr(MB/s) Comp(sec) CompMergeCPU(sec) Comp(cnt) Avg(sec) KeyIn
KeyDrop
-----
L0      2/0     2.46 KB  0.5      0.0      0.0      0.0      0.0      0.0      0.0      1.0      0.0      0.0      0.53      0.51      2      0.264
0
Sum     2/0     2.46 KB  0.0      0.0      0.0      0.0      0.0      0.0      0.0      1.0      0.0      0.0      0.53      0.51      2      0.264
0
Int     0/0     0.00 KB  0.0      0.0      0.0      0.0      0.0      0.0      0.0      0.0      0.0      0.0      0.00      0.00      0      0.000
0

```

If the number of `L0` files is large, the read performance will be greatly affected and compaction can be triggered.

"Can I do full `compactions` for multiple graph spaces at the same time?"

Yes, you can. But the IO is much larger at this time and the efficiency may be affected.

"How much time does it take for full `compactions` ?"

When `rocksdb_rate_limit` is set to `20`, you can estimate the full compaction time by dividing the hard disk usage by the `rocksdb_rate_limit`. If you do not set the `rocksdb_rate_limit` value, the empirical value is around 50 MB/s.

"Can I modify `--rocksdb_rate_limit` dynamically?"

No, you cannot.

"Can I stop a full `compaction` after it starts?"

No, you cannot. When you start a full compaction, you have to wait till it is done. This is the limitation of RocksDB.

Last update: February 8, 2022

9.2 Storage load balance

You can use the `BALANCE` statement to balance the distribution of partitions and Raft leaders, or clear some Storage servers for easy maintenance. For details, see [BALANCE](#).

Legacy version compatibility

The `BALANCE DATA` commands are not supported.

9.2.1 Balance leader distribution

To balance the raft leaders, run `BALANCE LEADER`.

Example

```
nebula> BALANCE LEADER;
```

Run `SHOW HOSTS` to check the balance result.

```
nebula> SHOW HOSTS;
```

Host	Port	Status	Leader count	Leader distribution	Partition distribution	Version
"192.168.10.100"	9779	"ONLINE"	4	"basketballplayer:3"	"basketballplayer:8"	"3.0.0"
"192.168.10.101"	9779	"ONLINE"	8	"basketballplayer:3"	"basketballplayer:8"	"3.0.0"
"192.168.10.102"	9779	"ONLINE"	3	"basketballplayer:3"	"basketballplayer:8"	"3.0.0"
"192.168.10.103"	9779	"ONLINE"	0	"basketballplayer:2"	"basketballplayer:7"	"3.0.0"
"192.168.10.104"	9779	"ONLINE"	0	"basketballplayer:2"	"basketballplayer:7"	"3.0.0"
"192.168.10.105"	9779	"ONLINE"	0	"basketballplayer:2"	"basketballplayer:7"	"3.0.0"

Caution

In Nebula Graph 3.0.0, switching leaders will cause a large number of short-term request errors (Storage Error `E_RPC_FAILURE`). For solutions, see [FAQ](#).

Last update: February 8, 2022

9.3 Graph data modeling suggestions

This topic provides general suggestions for modeling data in Nebula Graph.

Note

The following suggestions may not apply to some special scenarios. In these cases, find help in the [Nebula Graph community](#).

9.3.1 Model for performance

There is no perfect method to model in Nebula Graph. Graph modeling depends on the questions that you want to know from the data. Your data drives your graph model. Graph data modeling is intuitive and convenient. Create your data model based on your business model. Test your model and gradually optimize it to fit your business. To get better performance, you can change or re-design your model multiple times.

Design and evaluate the most important queries

Usually, various types of queries are validated in test scenarios to assess the overall capabilities of the system. However, in most production scenarios, there are not many types of frequently used queries. You can optimize the data model based on key queries selected according to the Pareto (80/20) principle.

No predefined bonds between Tags and Edge types

Define the bonds between Tags and Edge types in the application, not Nebula Graph. There are no statements that could get the bonds between Tags and Edge types.

Tags/Edge types predefine a set of properties

While creating Tags or Edge types, you need to define a set of properties. Properties are part of the Nebula Graph Schema.

Control changes in the business model and the data model

Changes here refer to changes in business models and data models (meta-information), not changes in the data itself.

Some graph databases are designed to be Schema-free, so their data modeling, including the modeling of the graph topology and properties, can be very flexible. Properties can be re-modeled to graph topology, and vice versa. Such systems are often specifically optimized for graph topology access.


Nebula Graph 3.0.0 is a strong-Schema (row storage) system, which means that the business model should not change frequently. For example, the property Schema should not change. It is similar to avoiding `ALTER TABLE` in MySQL.

On the contrary, vertices and their edges can be added or deleted at low costs. Thus, the easy-to-change part of the business model should be transformed to vertices or edges, rather than properties.

For example, in a business model, people have relatively fixed properties such as age, gender, and name. But their contact, place of visit, trade account, and login device are often changing. The former is suitable for modeling as properties and the latter as vertices or edges.

Set temporary properties through self-loop edges

As a strong Schema system, Nebula Graph does not support List-type properties. And using `ALTER TAG` costs too much. If you need to add some temporary properties or List-type properties to a vertex, you can first create an edge type with the required properties, and then insert one or more edges that direct to the vertex itself. The figure is as follows.

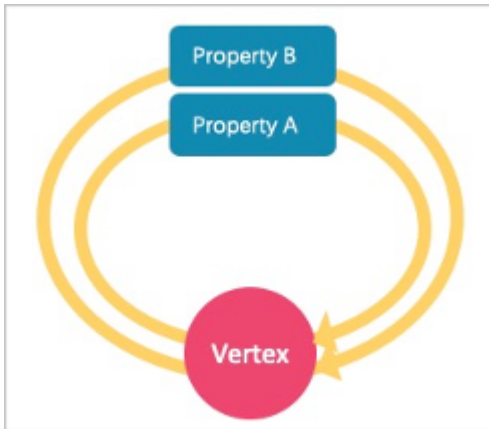

To retrieve temporary properties of vertices, fetch from self-loop edges. For example:

```
//Create the edge type and insert the loop property.
nebula> CREATE EDGE IF NOT EXISTS temp(tmp int);
nebula> INSERT EDGE temp(tmp) VALUES "player100"->"player100"@1:(1);
nebula> INSERT EDGE temp(tmp) VALUES "player100"->"player100"@2:(2);
nebula> INSERT EDGE temp(tmp) VALUES "player100"->"player100"@3:(3);

//After the data is inserted, you can query the loop property by general query statements, for example:
nebula> GO FROM "player100" OVER temp YIELD properties(edge).tmp;
+-----+
| properties(EDGE).tmp |
+-----+
| 1                     |
| 2                     |
| 3                     |
+-----+

//If you want the results to be returned in the form of a List, you can use a function, for example:
nebula> MATCH (v1:player)-[e:temp]->() return collect(e.tmp);
+-----+
| collect(e.tmp) |
+-----+
| [1, 2, 3]      |
+-----+
```

Breadth-first traversal over depth-first traversal

- Nebula Graph has lower performance for depth-first traversal based on the Graph topology, and better performance for breadth-first traversal and obtaining properties. For example, if model A contains properties "name", "age", and "eye color", it is recommended to create a tag `person` and add properties `name`, `age`, and `eye_color` to it. If you create a tag `eye_color` and an edge type `has`, and then create an edge to represent the eye color owned by the person, the traversal performance will not be high.
- The performance of finding an edge by an edge property is close to that of finding a vertex by a vertex property. For some databases, it is recommended to re-model edge properties as those of the intermediate vertices. For example, model the pattern `(src)-[edge {P1, P2}]->(dst)` as `(src)-[edge1]->(i_node {P1, P2})-[edge2]->(dst)`. With Nebula Graph 3.0.0, you can use `(src)-[edge {P1, P2}]->(dst)` directly to decrease the depth of the traversal and increase the performance.

Edge directions

To query in the opposite direction of an edge, use the following syntax:

```
(dst)<-[edge]-(src) or GO FROM dst REVERSELY.
```

If you do not care about the directions or want to query against both directions, use the following syntax:

```
(src)-[edge]-(dst) or GO FROM src BIDIRECT.
```

Therefore, there is no need to insert the same edge redundantly in the reversed direction.

Set tag properties appropriately

Put a group of properties that are on the same level into the same tag. Different groups represent different concepts.

Use indexes correctly

Using property indexes helps find VIDs through properties, but can lead to performance reduction by 90% or even more. Only use an index when you need to find vertices or edges through their properties.

Design VIDs appropriately

See [VID](#).


Long texts

Do not use long texts to create edge properties. Edge properties are stored twice and long texts lead to greater write amplification. For how edges properties are stored, see [Storage architecture](#). It is recommended to store long texts in HBase or Elasticsearch and store its address in Nebula Graph.

9.3.2 Dynamic graphs (sequence graphs) are not supported

In some scenarios, graphs need to have the time information to describe how the structure of the entire graph changes over time.¹

The Rank field on Edges in Nebula Graph 3.0.0 can be used to store time in int64, but no field on vertices can do this because if you store the time information as property values, it will be covered by new insertion. Thus Nebula Graph does not support sequence graphs.

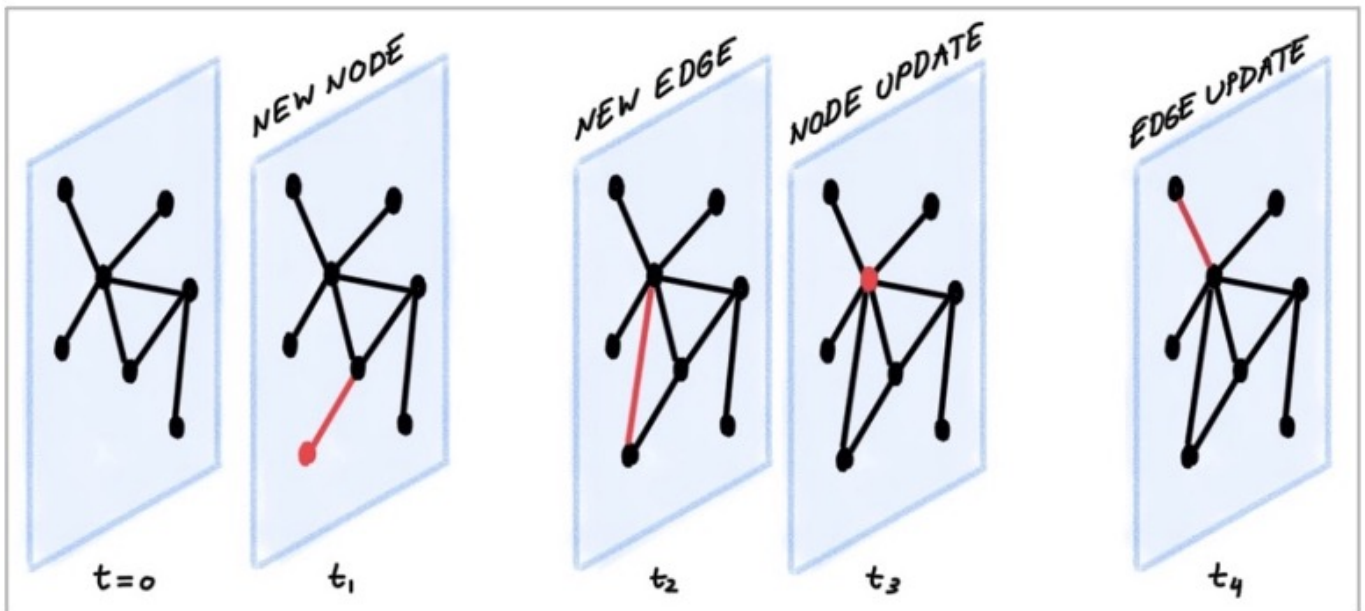

¹. https://blog.twitter.com/engineering/en_us/topics/insights/2021/temporal-graph-networks ←

9.4 System design suggestions

9.4.1 QPS or low-latency first

- Nebula Graph 3.0.0 is good at handling small requests with high concurrency. In such scenarios, the whole graph is huge, containing maybe trillions of vertices or edges, but the subgraphs accessed by each request are not large (containing millions of vertices or edges), and the latency of a single request is low. The concurrent number of such requests, i.e., the QPS, can be huge.
- On the other hand, in interactive analysis scenarios, the request concurrency is usually not high, but the subgraphs accessed by each request are large, with thousands of millions of vertices or edges. To lower the latency of big requests in such scenarios, you can split big requests into multiple small requests in the application, and concurrently send them to multiple graphd processes. This can decrease the memory used by each graphd process as well. Besides, you can use [Nebula Algorithm](#) for such scenarios.

9.4.2 Data transmission and optimization

- Read/write balance. Nebula Graph fits into OLTP scenarios with balanced read/write, i.e., concurrent write and read. It is not suitable for OLAP scenarios that usually need to write once and read many times.
- Select different write methods. For large batches of data writing, use SST files. For small batches of data writing, use `INSERT`.
- Run `COMPACTION` and `BALANCE` jobs to optimize data format and storage distribution at the right time.
- Nebula Graph 3.0.0 does not support transactions and isolation in the relational database and is closer to NoSQL.

9.4.3 Query preheating and data preheating

Preheat on the application side:

- The Grapd process does not support pre-compiling queries and generating corresponding query plans, nor can it cache previous query results.
- The Storagd process does not support preheating data. Only the LSM-Tree and BloomFilter of RocksDB are loaded into memory at startup.
- Once accessed, vertices and edges are cached respectively in two types of LRU cache of the Storage Service.

Last update: February 8, 2022

9.5 Execution plan

Nebula Graph 3.0.0 applies rule-based execution plans. Users cannot change execution plans, pre-compile queries (and corresponding plan cache), or accelerate queries by specifying indexes.

To view the execution plan and executive summary, see [EXPLAIN](#) and [PROFILE](#).

Last update: January 14, 2022

9.6 Processing super vertices

9.6.1 Principle introduction

In graph theory, a super vertex, also known as a dense vertex, is a vertex with an extremely high number of adjacent edges. The edges can be outgoing or incoming.

Super vertices are very common because of the power-law distribution. For example, popular leaders in social networks (Internet celebrities), top stocks in the stock market, Big Four in the banking system, hubs in transportation networks, websites with high clicking rates on the Internet, and best sellers in E-commerce.

In Nebula Graph 3.0.0, a vertex and its properties form a key-value pair, with its VID and other meta information as the key. Its Out-Edge Key-Value and In-Edge Key-Value are stored in the same partition in the form of LSM-trees in hard disks and caches.

Therefore, directed traversals from this vertex and directed traversals ending at this vertex both involve either a large number of sequential IO scans (ideally, after Compaction or a large number of random IO (frequent writes to the vertex and its ingoing and outgoing edges)).

As a rule of thumb, a vertex is considered dense when the number of its edges exceeds 10,000. Some special cases require additional consideration.

Note

In Nebula Graph 3.0.0, there is not any data structure to store the out/in degree for each vertex. Therefore, there is no direct method to know whether it is a super vertex or not. You can try to use Spark to count the degrees periodically.

Indexes for duplicate properties

In a property graph, there is another class of cases similar to super vertices: **a property has a very high duplication rate**, i.e., many vertices with the same tag but different VIDs have identical property and property values.

Property indexes in Nebula Graph 3.0.0 are designed to reuse the functionality of RocksDB in the Storage Service, in which case indexes are modeled as keys with the same prefix. If the lookup of a property fails to hit the cache, it is processed as a random seek and a sequential prefix scan on the hard disk to find the corresponding VID. After that, the graph is usually traversed from this vertex, so that another random read and sequential scan for the corresponding key-value of this vertex will be triggered. The higher the duplication rate, the larger the scan range.

For more information about property indexes, see [How indexing works in Nebula Graph](#).

Usually, special design and processing are required when the number of duplicate property values exceeds 10,000.

Suggested solutions

SOLUTIONS AT THE DATABASE END

1. **Truncation**: Only return a certain number (a threshold) of edges, and do not return other edges exceeding this threshold.
2. **Compact**: Reorganize the order of data in RocksDB to reduce random reads and increase sequential reads.

SOLUTIONS AT THE APPLICATION END

Break up some of the super vertices according to their business significance:

- Delete multiple edges and merge them into one.

For example, in the transfer scenario `(Account_A)-[TRANSFER]->(Account_B)`, each transfer record is modeled as an edge between account A and account B, then there may be tens of thousands of transfer records between `(Account_A)` and `(Account_B)`.

In such scenarios, merge obsolete transfer details on a daily, weekly, or monthly basis. That is, batch-delete old edges and replace them with a small number of edges representing `monthly total` and `times`. And keep the transfer details of the latest month.

- Split an edge into multiple edges of different types.

For example, in the `(Airport)-[DEPART]-(Flight)` scenario, the departure of each flight is modeled as an edge between a flight and an airport. Departures from a big airport might be enormous.

According to different airlines, divide the `DEPART` edge type into finer edge types, such as `DEPART_CEAIR`, `DEPART_CSAIR`, etc. Specify the departing airline in queries (graph traversal).

- Split vertices.

For example, in the loan network `(person)-[BORROW]->(bank)`, large bank A will have a very large number of loans and borrowers.

In such scenarios, you can split the large vertex A into connected sub-vertices A1, A2, and A3.

```
(Person1)-[BORROW]->(BankA1), (Person2)-[BORROW]->(BankA2), (Person2)-[BORROW]->(BankA3);
(BankA1)-[BELONGS_TO]->(BankA), (BankA2)-[BELONGS_TO]->(BankA), (BankA3)-[BELONGS_TO]->(BankA).
```

A1, A2, and A3 can either be three real branches of bank A, such as Beijing branch, Shanghai branch, and Zhejiang branch, or three virtual branches set up according to certain rules, such as `A1: 1-1000`, `A2: 1001-10000` and `A3: 10000+` according to the number of loans. In this way, any operation on A is converted into three separate operations on A1, A2, and A3.

Last update: January 14, 2022

9.7 Best practices

Nebula Graph is used in a variety of industries. This topic presents a few best practices for using Nebula Graph. For more best practices, see [Blog](#).

9.7.1 Scenarios

- [Use cases](#)
- [User review](#)
- [Performance](#)

9.7.2 Kernel

- [Nebula Graph Source Code Explained: Variable-Length Pattern Matching](#)
- [Adding a Test Case for Nebula Graph](#)
- [BDD-Based Integration Testing Framework for Nebula Graph: Part I](#)
- [BDD-Based Integration Testing Framework for Nebula Graph: Part II](#)
- [Understanding Subgraph in Nebula Graph 2.0](#)
- [Full-Text Indexing in Nebula Graph 2.0](#)

9.7.3 Ecosystem tool

- [Validating Import Performance of Nebula Importer](#)
- [Community Contribution | Nebula Graph 2.0 Performance Testing](#)
- [Ecosystem Tools: Nebula Graph Dashboard for Monitoring](#)
- [Visualizing Graph Data with Nebula Explorer](#)

Last update: January 14, 2022

10. Client

10.1 Clients overview

Nebula Graph supports multiple types of clients for users to connect to and manage the Nebula Graph database.

- **Nebula Console**: the native CLI client
- **Nebula CPP**: the Nebula Graph client for C++
- **Nebula Java**: the Nebula Graph client for Java
- **Nebula Python**: the Nebula Graph client for Python
- **Nebula Go**: the Nebula Graph client for Golang

Note

For now, only Nebula Java is thread-safe.

Last update: January 18, 2022

10.2 Nebula Console

Nebula Console is a native CLI client for Nebula Graph. It can be used to connect a Nebula Graph cluster and execute queries. It can also support special commands to manage parameters, export query results, import test datasets, etc. This topic describes these special commands.

To connect Nebula Graph using Nebula Console, see [Step 3: Connect to Nebula Graph](#).

Note

The commands are case insensitive.

10.2.1 Manage parameters

You can save parameters for parameterized queries.

Note

- Setting a parameter as a VID in a query is not supported.
- Parameters are not supported in `SAMPLE` clauses.
- Parameters are deleted when their sessions are released.
- The command to save a parameter is as follows:

```
nebula> :param <param_name> => <param_value>;
```

The example is as follows:

```
nebula> :param p1 => "Tim Duncan";
nebula> MATCH (v:player{name:$p1})-[:follow]->(n) RETURN v,n;
+-----+
| v | n |
+-----+
| ("player100":player{age: 42, name: "Tim Duncan"}) | ("player125":player{age: 41, name: "Manu Ginobili"}) |
| ("player100":player{age: 42, name: "Tim Duncan"}) | ("player101":player{age: 36, name: "Tony Parker"}) |
+-----+
nebula> :param p2 => {"a":3,"b":false,"c":"Tim Duncan"};
nebula> RETURN $p2.b AS b;
+-----+
| b |
+-----+
| false |
+-----+
```

- The command to view the saved parameters is as follows:

```
nebula> :params;
```

- The command to delete a specified parameter is as follows:

```
nebula> :param <param_name> =;>;
```

10.2.2 Export query results

Export query results, which can be saved as a CSV file or DOT file.

Note

- The exported file is stored in the working directory, i.e., what the linux command `pwd` shows.
- This command only works for the next query statement.
- You can copy the contents of the DOT file and paste them in [GraphvizOnline](#) to generate a visualized execution plan.
- The command to export a csv file is as follows:

```
nebula> :CSV <file_name.csv>;
```

- The command to export a DOT file is as follows:

```
nebula> :dot <file_name.dot>
```

The example is as follows:

```
nebula> :dot a.dot
nebula> PROFILE FORMAT="dot" GO FROM "player100" OVER follow;
```

10.2.3 Import a testing dataset

The testing dataset is named `basketballplayer`. To view details about the schema and data, use the corresponding `SHOW` command.

The command to import a testing dataset is as follows:

```
nebula> :play basketballplayer
```

10.2.4 Run a command multiple times

To run a command multiple times, use the following command:

```
nebula> :repeat N
```

The example is as follows:

```
nebula> :repeat 3
nebula> GO FROM "player100" OVER follow YIELD dst(edge);
+-----+
| dst(EDGE) |
+-----+
| "player101" |
| "player125" |
+-----+
Got 2 rows (time spent 2602/3214 us)

Fri, 20 Aug 2021 06:36:05 UTC

+-----+
| dst(EDGE) |
+-----+
| "player101" |
| "player125" |
+-----+
Got 2 rows (time spent 583/849 us)

Fri, 20 Aug 2021 06:36:05 UTC

+-----+
| dst(EDGE) |
+-----+
| "player101" |
| "player125" |
+-----+
Got 2 rows (time spent 496/671 us)

Fri, 20 Aug 2021 06:36:05 UTC

Executed 3 times, (total time spent 3681/4734 us), (average time spent 1227/1578 us)
```

10.2.5 Sleep to wait

This command will make Nebula Graph services sleep and wait for N seconds. The schema is altered in an async way and takes effect in the next heartbeat cycle. Therefore, this command is usually used when altering schema. The command is as follows:

```
nebula> :sleep N
```

10.2.6 Disconnect Nebula Console from Nebula Graph

You can use `:EXIT` or `:QUIT` to disconnect from Nebula Graph. For convenience, Nebula Console supports using these commands in lower case without the colon (":"), such as `quit`.

The example is as follows:

```
nebula> :QUIT  
Bye root!
```

10.2.7 FAQ

"How can I install Nebula Console from the source code?"

To download and compile the latest source code of Nebula Console, follow the instructions on [the nebula console GitHub page](#).

Last update: January 14, 2022

10.3 Nebula CPP

Nebula CPP is a C++ client for connecting to and managing the Nebula Graph database.

10.3.1 Prerequisites

- You have installed C++ and GCC 4.8 or later versions.
- You have prepared the **correct resources**.

10.3.2 Compatibility with Nebula Graph

Nebula Graph version	Nebula CPP version
3.0.0	3.0.0
2.6.x	2.5.0
2.5.x	2.5.0
2.0.x	2.0.0

10.3.3 Install Nebula CPP

1. Clone the Nebula CPP source code to the host.

- (Recommended) To install a specific version of Nebula CPP, use the Git option `--branch` to specify the branch. For example, to install v3.0.0, run the following command:

```
$ git clone --branch v3.0.0 https://github.com/vesoft-inc/nebula-cpp.git
```

- To install the daily development version, run the following command to download the source code from the `master` branch:

```
$ git clone https://github.com/vesoft-inc/nebula-cpp.git
```

2. Change the working directory to `nebula-cpp`.

```
$ cd nebula-cpp
```

3. Create a directory named `build` and change the working directory to it.

```
$ mkdir build && cd build
```

4. Generate the `makefile` file with CMake.

Note

The default installation path is `/usr/local/nebula`. To modify it, add the `-DCMAKE_INSTALL_PREFIX=<installation_path>` option while running the following command.

```
$ cmake -DCMAKE_BUILD_TYPE=Release ..
```

Note

If G++ does not support C++ 11, add the option `-DDISABLE_CXX11_ABI=ON`.

5. Compile Nebula CPP.

To speed up the compiling, use the `-j` option to set a concurrent number N . It should be $\min(\text{CPU core number}, \frac{\text{the_memory_size(GB)}}{2})$.

```
$ make -j{N}
```

6. Install Nebula CPP.

```
$ sudo make install
```

7. Update the dynamic link library.

```
$ sudo ldconfig
```

10.3.4 Use Nebula CPP

Compile the CPP file to an executable file, then you can use it. The following steps take using `SessionExample.cpp` for example.

1. Use the [example code](#) to create the `SessionExample.cpp` file.

2. Run the following command to compile the file.

```
$ LIBRARY_PATH=<library_folder_path>:$LIBRARY_PATH g++ -std=c++11 SessionExample.cpp -I<include_folder_path> -lnebula_graph_client -o session_example
```

- `library_folder_path`: The storage path of the Nebula Graph dynamic libraries. The default path is `/usr/local/nebula/lib64`.
- `include_folder_path`: The storage of the Nebula Graph header files. The default path is `/usr/local/nebula/include`.

For example:

```
$ LIBRARY_PATH=/usr/local/nebula/lib64:$LIBRARY_PATH g++ -std=c++11 SessionExample.cpp -I/usr/local/nebula/include -lnebula_graph_client -o session_example
```

Core of the example code

This sub-section shows the core of the example code. For all the code, see [SessionExample](#).

Last update: February 15, 2022

10.4 Nebula Java

Nebula Java is a Java client for connecting to and managing the Nebula Graph database.

10.4.1 Prerequisites

You have installed Java 8.0 or later versions.

10.4.2 Compatibility with Nebula Graph

Nebula Graph version	Nebula Java version
3.0.0	3.0.0
2.6.x	2.6.1
2.0.x	2.0.0
2.0.0-rc1	2.0.0-rc1

10.4.3 Download Nebula Java

- (Recommended) To install a specific version of Nebula Java, use the Git option `--branch` to specify the branch. For example, to install v3.0.0, run the following command:

```
$ git clone --branch v3.0.0 https://github.com/vesoft-inc/nebula-java.git
```

- To install the daily development version, run the following command to download the source code from the `master` branch:

```
$ git clone https://github.com/vesoft-inc/nebula-java.git
```

10.4.4 Use Nebula Java

Note

We recommend that each thread uses one session. If multiple threads use the same session, the performance will be reduced.

When importing a Maven project with tools such as IDEA, set the following dependency in `pom.xml`.

Note

`3.0.0-SNAPSHOT` indicates the daily development version that may have unknown issues. We recommend that you replace `3.0.0-SNAPSHOT` with a released version number to use a table version.

```
<dependency>
  <groupId>com.vesoft</groupId>
  <artifactId>client</artifactId>
  <version>3.0.0-SNAPSHOT</version>
</dependency>
```

If you cannot download the dependency for the daily development version, set the following content in `pom.xml`. Released versions have no such issue.

```
<repositories>
  <repository>
    <id>snapshots</id>
    <url>https://oss.sonatype.org/content/repositories/snapshots</url>
  </repository>
</repositories>
```

If there is no Maven to manage the project, manually download the [JAR file](#) to install Nebula Java.

Core of the example code

This sub-section shows the core of the example code. For all the code, see [GraphClientExample](#).

Last update: February 15, 2022

10.5 Nebula Python

Nebula Python is a Python client for connecting to and managing the Nebula Graph database.

10.5.1 Prerequisites

You have installed Python 3.6 or later versions.

10.5.2 Compatibility with Nebula Graph

Nebula Graph version	Nebula Python version
3.0.0	3.0.0
2.6.x	2.6.0
2.0.x	2.0.0
2.0.0-rc1	2.0.0rc1

10.5.3 Install Nebula Python

Install Nebula Python with pip

```
$ pip install nebula3-python==<version>
```

Install Nebula Python from the source code

1. Clone the Nebula Python source code to the host.

- (Recommended) To install a specific version of Nebula Python, use the Git option `--branch` to specify the branch. For example, to install v3.0.0, run the following command:

```
$ git clone --branch v3.0.0 https://github.com/vesoft-inc/nebula-python.git
```

- To install the daily development version, run the following command to download the source code from the `master` branch:

```
$ git clone https://github.com/vesoft-inc/nebula-python.git
```

2. Change the working directory to `nebula-python`.

```
$ cd nebula-python
```

3. Run the following command to install Nebula Python.

```
$ pip install .
```

10.5.4 Core of the example code

This section shows the core of the example code. For all the code, see [Example](#).

Last update: February 15, 2022

10.6 Nebula Go

Nebula Go is a Golang client for connecting to and managing the Nebula Graph database.

10.6.1 Prerequisites

You have installed Golang 1.13 or later versions.

10.6.2 Compatibility with Nebula Graph

Nebula Graph version	Nebula Go version
3.0.0	3.0.0
2.6.x	2.6.0
2.0.x	2.0.0-GA

10.6.3 Download Nebula Go

- (Recommended) To install a specific version of Nebula Go, use the Git option `--branch` to specify the branch. For example, to install v3.0.0, run the following command:

```
$ git clone --branch release-v3.0.0 https://github.com/vesoft-inc/nebula-go.git
```

- To install the daily development version, run the following command to download the source code from the `master` branch:

```
$ git clone https://github.com/vesoft-inc/nebula-go.git
```

10.6.4 Install or update

Run the following command to install or update Nebula Go:

```
$ go get -u -v github.com/vesoft-inc/nebula-go@<tag>
```

`tag`: Specify the branch, such as `master` or `release-v3.0.0`.

10.6.5 Core of the example code

This section shows the core of the example code. For all the code, see [graph_client_basic_example](#) and [graph_client_goroutines_example](#).

Last update: February 15, 2022

11. Nebula Graph Studio

11.1 Change Log

11.1.1 v3.2.0 (2022.02.15)

- Feature enhancements:
 - Compatible with Nebula Graph v3.0.0.
 - Added the use of DEB to deploy and start Studio.
 - Import:
 - Added password confirmation when importing to enhance security.
 - Console:
 - Added save parameter for parameterized query.
 - Compatibility:
 - Remove Studio's dependency on Node.js.
-

Last update: February 15, 2022

11.2 About Nebula Graph Studio

11.2.1 What is Nebula Graph Studio

Nebula Graph Studio (Studio in short) is a browser-based visualization tool to manage Nebula Graph. It provides you with a graphical user interface to manipulate graph schemas, import data, explore graph data, and run nGQL statements to retrieve data. With Studio, you can quickly become a graph exploration expert from scratch. Users can view the latest source code in the Nebula Graph GitHub repository, see [nebula-studio](#) for details.

Released versions

You can deploy Studio using the following methods:

- You can deploy Studio with Docker, RPM-based, Tar-based or DEB-based and connect it to Nebula Graph. For more information, see [Deploy Studio](#).
- Helm-based. You can deploy Studio with Helm in the Kubernetes cluster and connect it to Nebula Graph. For more information, see [Helm-based Studio](#).

The functions of the above four deployment methods are the same and may be restricted when using Studio. For more information, see [Limitations](#).

Features

Studio provides these features:

- Graphical user interface (GUI) makes Nebula Graph management more user-friendly:
- On the **Schema** page, you can manage schemas with a graphical user interface. It helps you quickly get started with Nebula Graph.
- On the **Console** page, you can run nGQL statements and read the results in a human-friendly way.
- On the **Import** page, you can operate batch import of vertex and edge data with clicks, and view a real-time import log.
- On the **Explore** page, you can explore the graph data. It helps you dig the relationships among data and improves the efficiency of data analysis.

Scenarios

You can use Studio in one of these scenarios:

- You have a dataset, and you want to explore and analyze data in a visualized way. You can use Docker Compose to deploy Nebula Graph and then use Studio to explore or analyze data in a visualized way.
- You have deployed Nebula Graph and imported a dataset. You want to use a GUI to run nGQL statements or explore and analyze graph data in a visualized way.
- You are a beginner of nGQL (Nebula Graph Query Language) and you prefer to use a GUI rather than a command-line interface (CLI) to learn the language.

Authentication

Authentication is not enabled in Nebula Graph by default. Users can log into Studio with the `root` account and any password.

When Nebula Graph enables authentication, users can only sign into Studio with the specified account. For more information, see [Authentication](#).

Last update: February 16, 2022

11.2.2 Explanations of terms

This topic provides explanations of terms you may need to know when using Studio.

- **Nebula Graph Studio:** Referred to as Studio in this manual. Studio is a browser-based visualization tool to manage Nebula Graph. It provides you with a graphical user interface to manipulate graph schemas, import data, explore graph data, and run nGQL statements to retrieve data.
- **Nebula Graph:** Nebula Graph is a distributed, scalable, and lightning-fast graph database. It is the optimal solution in the world capable of hosting graphs with dozens of billions of vertices (nodes) and trillions of edges (relationships) with millisecond latency. For details, refer to [Nebula Graph User Manual](#).

Last update: January 14, 2022

11.2.3 Limitations

This topic introduces the limitations of Studio.

Nebula Graph versions

Note

The Studio version is released independently of the Nebula Graph core. The correspondence between the versions of Studio and the Nebula Graph core, as shown in the table below.

Nebula Graph version	Studio version
1.x	1.x
2.0 & 2.0.1	2.x
2.5.0 & 2.5.1	3.0.0
2.6.0 & 2.6.1 & 2.6.2	3.1.0
3.0.0	3.2.0

Architecture

For now, Studio v3.x supports x86_64 architecture only.

Upload data

Only CSV files without headers can be uploaded, but no limitations are applied to the size and store period for a single file. The maximum data volume depends on the storage capacity of your machine.

Data backup

For now, you can export the queried results in the CSV format on the **Console** page and export data in the CSV format and png format on the **Explore** page. No other backup methods are available.

nGQL statements

On the **Console** page of Docker-based and RPM-based Studio v3.x, all the nGQL syntaxes except these are supported:

- `USE <space_name>`: You cannot run such a statement on the **Console** page to choose a graph space. As an alternative, you can click a graph space name in the drop-down list of **Current Graph Space**.
- You cannot use line breaks (\n). As an alternative, you can use the Enter key to split a line.

For Studio on Cloud, besides the preceding syntax, you cannot run these account and role management statements on the Console page:

- `CREATE USER`
- `ALTER USER`
- `CHANGE PASSWORD`
- `DROP USER`
- `GRANT ROLE`
- `REVOKE ROLE`

For more information about the preceding statements, see [User management](#)

Browser


We recommend that you use the latest version of Chrome to get access to Studio.

Last update: February 16, 2022

11.2.4 Check updates

Studio is in development. Users can view the latest releases features through [Changelog](#).

To view the Changelog, on the upper-right corner of the page, click the version and then **New version**.

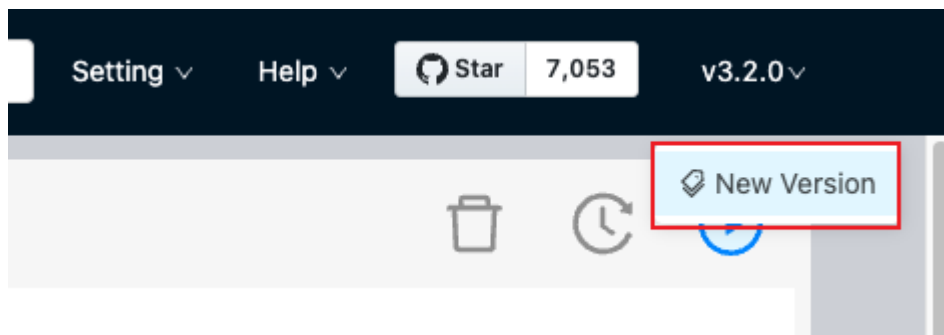

Last update: February 9, 2022

11.2.5 Shortcuts

This topic lists the shortcuts supported in Studio.

Description	Operation
Run nGQL statements in Console	Shift + Enter
Select multiple vertices in Schema	Shift + Left-click
Zoom out graph in Schema	Shift + '-'
Zoom in graph in Schema	Shift + '+'
Show graph in Schema	Shift + 'l'
Rollback in Schema	Shift + 'z'
Delete map in Schema	Selected + Shift + 'del'
Expand a vertex in Schema	Double Left-click or Shift + Enter

Last update: January 14, 2022

11.3 Deploy and connect

11.3.1 Deploy Studio

This topic describes how to deploy Studio locally by Docker, RPM, tar and DEB package.

Note

You can also try some functions online in [Studio](#).

RPM-based Studio

PREREQUISITES

Before you deploy RPM-based Studio, you must confirm that:

- The Nebula Graph services are deployed and started. For more information, see [Nebula Graph Database Manual](#).
- The Linux distribution is CentOS, install `lsyf`.
- Before the installation starts, the following ports are not occupied.

Port	Description
7001	Web service provided by Studio.

INSTALL

1. Select and download the RPM package according to your needs. It is recommended to select the latest version. Common links are as follows:

Installation package	Checksum	Nebula version
nebula-graph-studio-3.2.0.x86_64.rpm	nebula-graph-studio-3.2.0.x86_64.rpm.sha256	3.0.0

2. Use `sudo rpm -i <rpm>` to install RPM package.

For example, install Studio 3.2.0, use the following command. The default installation path is `/usr/local/nebula-graph-studio`.

```
sudo rpm -i nebula-graph-studio-3.2.0.x86_64.rpm
```

You can also install it to the specified path using the following command:

```
$ sudo rpm -i nebula-graph-studio-3.2.0.x86_64.rpm --prefix=<path>
```

When the screen returns the following message, it means that the PRM-based Studio has been successfully started.

```
Created symlink from /etc/systemd/system/multi-user.target.wants/nebula-graph-studio.service to /usr/lib/systemd/system/nebula-graph-studio.service.
```

3. When Studio is started, use `http://ip address:7001` to get access to Studio.

If you can see the **Config Server** page on the browser, Studio is started successfully.



Config Server

* Host:

* Username:

* Password: 

Connect

UNINSTALL

You can uninstall Studio using the following command:

```
sudo rpm -e nebula-graph-studio-3.2.0.x86_64
```

EXCEPTION HANDLING

If the automatic start fails during the installation process or you want to manually start or stop the service, use the following command:

- Start the service manually

```
bash /usr/local/nebula-graph-studio/scripts/rpm/start.sh
```

- Stop the service manually

```
bash /usr/local/nebula-graph-studio/scripts/rpm/stop.sh
```

If you encounter an error `bind EADDRINUSE 0.0.0.0:7001` when starting the service, you can use the following command to check port 7001 usage.

```
lsof -i:7001
```

If the port is occupied and the process on that port cannot be terminated, you can use the following command to change Studio service port and restart the service.

```
//Open the configuration file
$ vi config/config.default.js

//Change the port
web:
# task_id_path:
# upload_dir:
# tasks_dir:
# sqllitedb_file_path:
# ip:
port: 7001 // Modify this port number and change it to any

//Restart service
$ systemctl restart nebula-graph-studio.service
```

tar-based Studio

PREREQUISITES

Before you deploy tar-based Studio, you must do a check of these:

- The Nebula Graph services are deployed and started. For more information, see [Nebula Graph Database Manual](#).
- Before the installation starts, the following ports are not occupied.

Port	Description
7001	Web service provided by Studio

INSTALL AND DEPLOY

1. Select and download the tar package according to your needs. It is recommended to select the latest version. Common links are as follows:

Installation package	Studio version
nebula-graph-studio-3.2.0.x86_64.tar.gz	3.2.0

2. Use `tar -xvf` to decompress the tar package.

```
tar -xvf nebula-graph-studio-3.2.0.x86_64.tar.gz
```

3. Deploy and start nebula-graph-studio.

```
$ cd nebula-graph-studio
$ ./server
```

Caution

Studio 3.0.0 version is not dependent on nebula-importer and nebula-http-gateway, so the installation and deployment procedure is different from Studio v3.1.0.

4. When Studio is started, use `http://ip address:7001` to get access to Studio.

If you can see the **Config Server** page on the browser, Studio is started successfully.



Config Server

* Host:

* Username:

* Password:

Connect

STOP SERVICE

You can use `kill pid` to stop the service:

```
$ kill $(lsof -t -i :7001) #stop nebula-graph-studio
```

DEB-based Studio

PREREQUISITES

Before you deploy DEB-based Studio, you must do a check of these:

- The Nebula Graph services are deployed and started. For more information, see [Nebula Graph Database Manual](#).
- The Linux distribution is Ubuntu.
- Before the installation starts, the following ports are not occupied.

Port	Description
7001	Web service provided by Studio

INSTALL

1. Select and download the DEB package according to your needs. It is recommended to select the latest version. Common links are as follows:

Installation package	Checksum	Nebula version
nebula-graph-studio-3.2.0.x86_64.deb	nebula-graph-studio-3.2.0.x86_64.deb.sha256	3.0.0

2. Use `sudo dpkg -i <deb>` to install DEB package.

For example, install Studio 3.2.0, use the following command:

```
$ sudo dpkg -i nebula-graph-studio-3.2.0.x86_64.deb
```

3. When Studio is started, use `http://ip address:7001` to get access to Studio.

If you can see the **Config Server** page on the browser, Studio is started successfully.



Config Server

* Host:

* Username:

* Password:

Connect

UNINSTALL

You can uninstall Studio using the following command:

```
$ sudo dpkg -r nebula-graph-studio-3.2.0.x86_64
```

Docker-based Studio

PREREQUISITES

Before you deploy Docker-based Studio, you must do a check of these:

- The Nebula Graph services are deployed and started. For more information, see [Nebula Graph Database Manual](#).
- On the machine where Studio will run, Docker Compose is installed and started. For more information, see [Docker Compose Documentation](#).
- Before the installation starts, the following ports are not occupied.

Port	Description
7001	Web service provided by Studio

PROCEDURE

To deploy and start Docker-based Studio, run the following commands. Here we use Nebula Graph v3.0.0 for demonstration:

1. Download the configuration files for the deployment.

Installation package	Nebula Graph version
nebula-graph-studio-v3.2.0.tar.gz	3.0.0

2. Create the `nebula-graph-studio-v3.2.0` directory and decompress the installation package to the directory.

```
mkdir nebula-graph-studio-v3.2.0 -zxvf nebula-graph-studio-v3.2.0.gz -C nebula-graph-studio-v3.2.0
```

3. Change to the `nebula-graph-studio-v3.2.0` directory.

```
cd nebula-graph-studio-v3.2.0
```

4. Pull the Docker image of Studio.

```
docker-compose pull
```

5. Build and start Docker-based Studio. In this command, `-d` is to run the containers in the background.

```
docker-compose up -d
```

If these lines are returned, Docker-based Studio v3.x is deployed and started.

```
Creating docker_web_1    ... done
```

6. When Docker-based Studio is started, use `http://ip address:7001` to get access to Studio.

Note

Run `ifconfig` or `ipconfig` to get the IP address of the machine where Docker-based Studio is running. On the machine running Docker-based Studio, you can use `http://localhost:7001` to get access to Studio.

If you can see the **Config Server** page on the browser, Docker-based Studio is started successfully.



Config Server

* Host:

* Username:

* Password: 

Connect

Next to do

On the **Config Server** page, connect Docker-based Studio to Nebula Graph. For more information, see [Connect to Nebula Graph](#).

Last update: February 16, 2022

11.3.2 Deploy Studio with Helm

This topic describes how to deploy Studio with Helm.

Prerequisites

Before installing Studio, you need to install the following software and ensure the correct version of the software:

Software	Requirement
Kubernetes	>= 1.14
Helm	>= 3.2.0

Install

1. Use Git to clone the source code of Studio to the host.

```
$ git clone https://github.com/vesoft-inc/nebula-studio.git
```

2. Make the `nebula-studio` directory the current working directory.


```
bash
$ cd nebula-studio
```


3. Assume using release name: `my-studio`, installed Studio in Helm Chart.


```
$ helm upgrade --install my-studio --set service.type=NodePort --set service.port=30070 deployment/helm
```


4. When Studio is started, use `http://address-of-node:30070/` to get access to Studio.


If you can see the **Config Server** page on the browser, Studio is started successfully.


 **Studio**
Nebula Graph

 Schema

 Import

 Explore

 Console

Language: Engli... Setting ▼ Help ▼  Star 483

Config Server

* Host:

* Username:

* Password:

Connect

Uninstall

```
$ helm uninstall my-studio
```


Next to do

On the **Config Server** page, connect Docker-based Studio to Nebula Graph. For more information, see [Connect to Nebula Graph](#).

Configuration

Parameter	Default value	Description
replicaCount	0	The number of replicas for Deployment.
image.nebulaStudio.name	vesoft/nebula-graph-studio	The image name of nebula-graph-studio.
image.nebulaStudio.version	v3.2.0	The image version of nebula-graph-studio.
service.type	ClusterIP	The service type, which should be one of 'NodePort', 'ClusterIP', and 'LoadBalancer'.
service.port	7001	The expose port for nebula-graph-studio's web.
service.nodePort	32701	The proxy port for accessing nebula-studio outside kubernetes cluster.
resources.nebulaStudio	{}	The resource limits/requests for nebula-studio.
persistent.storageClassName	""	The name of storageClass. The default value will be used if not specified.
persistent.size	5Gi	The persistent volume size.

Last update: February 16, 2022

11.3.3 Connect to Nebula Graph

After successfully launching Studio, you need to configure to connect to Nebula Graph. This topic describes how Studio connects to the Nebula Graph database.

Prerequisites

Before connecting to the Nebula Graph database, you need to confirm the following information:

- The Nebula Graph services and Studio are started. For more information, see [Deploy Studio](#).
- You have the local IP address and the port used by the Graph service of Nebula Graph. The default port is `9669`.

Note

Run `ifconfig` or `ipconfig` on the machine to get the IP address.

- You have a Nebula Graph account and its password.

Note

If authentication is enabled in Nebula Graph and different role-based accounts are created, you must use the assigned account to connect to Nebula Graph. If authentication is disabled, you can use the `root` and any password to connect to Nebula Graph. For more information, see [Nebula Graph Database Manual](#).

Procedure

To connect Studio to Nebula Graph, follow these steps:

1. On the **Config Server** page of Studio, configure these fields:

- **Host:** Enter the IP address and the port of the Graph service of Nebula Graph. The valid format is `IP:port`. The default port is `9669`.

Note

When Nebula Graph and Studio are deployed on the same machine, you must enter the IP address of the machine, but not `127.0.0.1` or `localhost`, in the **Host** field.

- **Username** and **Password:** Fill in the log in account according to the authentication settings of Nebula Graph.
- If authentication is not enabled, you can use `root` and any password as the username and its password.
- If authentication is enabled and no account information has been created, you can only log in as GOD role and use `root` and `nebula` as the username and its password.
- If authentication is enabled and different users are created and assigned roles, users in different roles log in with their accounts and passwords.

Config Server

* Host:

* Username:


* Password:



Connect

2. After the configuration, click the **Connect** button.

If you can see the **Explore** page, Studio is successfully connected to Nebula Graph.

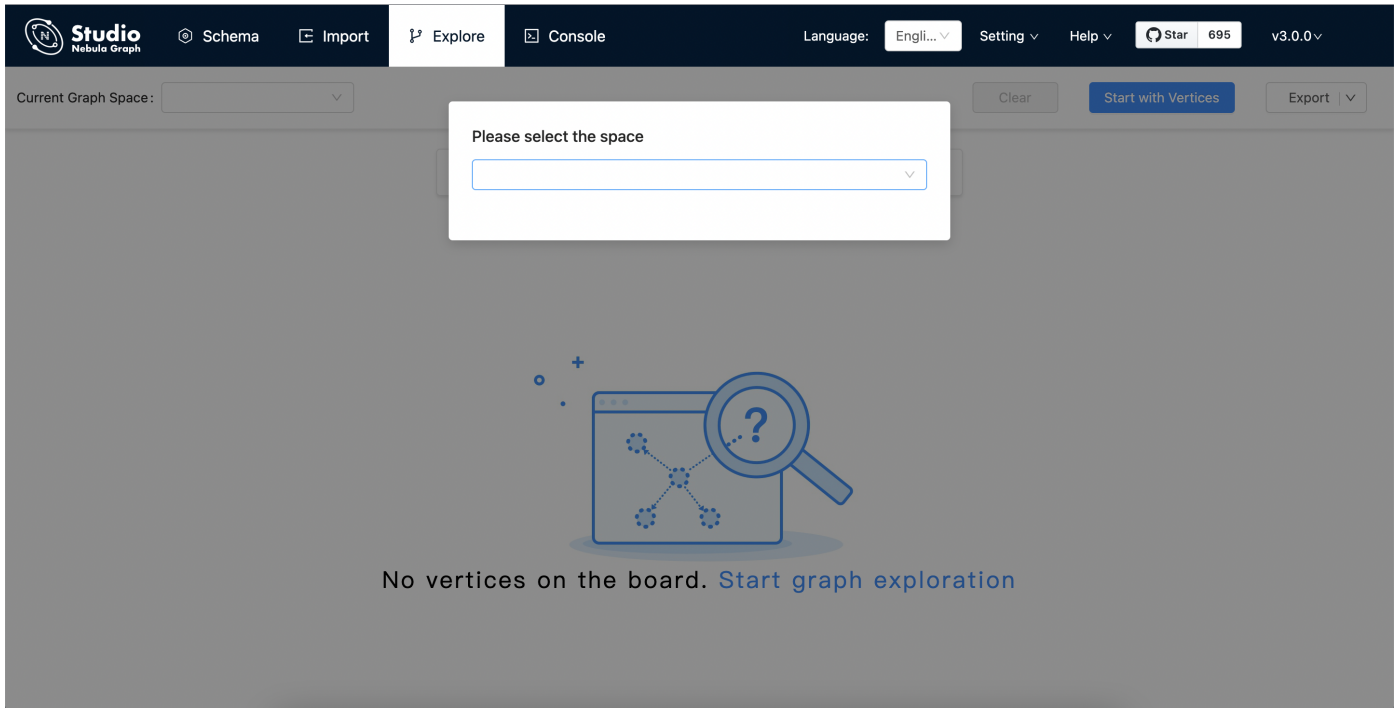

One session continues for up to 30 minutes. If you do not operate Studio within 30 minutes, the active session will time out and you must connect to Nebula Graph again.

Next to do

When Studio is successfully connected to Nebula Graph, you can do these operations:

- If your account has GOD or ADMIN privilege, you can create a schema on the **Console** page or on the **Schema** page.
- If your account has GOD, ADMIN, DBA, or USER privilege, you can batch import data on the **Import** page or insert data with nGQL statements on the **Console** page.
- If your account has GOD, ADMIN, DBA, USER, or GUEST privilege, you can retrieve data with nGQL statements on the **Console** page or explore and analyze data on the **Explore** page.

Last update: February 9, 2022

11.3.4 Clear connection

Clear connection

If you want to reset Nebula Graph, you can clear the connection and reconfigure the database.

When the Studio is still connected to a Nebula Graph database, you can choose **setting > clear connect** at the toolbar. If the **Config Server** page is displayed on the browser, it means that Studio has successfully disconnected from the Nebula Graph database.

Last update: January 14, 2022

11.4 Quick start

11.4.1 Design a schema

To manipulate graph data in Nebula Graph with Studio, you must have a graph schema. This article introduces how to design a graph schema for Nebula Graph.

A graph schema for Nebula Graph must have these essential elements:


- Tags (namely vertex types) and their properties.
- Edge types and their properties.

In this article, you can install the sample data set `basketballplayer` and use it to explore a pre-designed schema.

This table gives all the essential elements of the schema.

Element	Name	Property name (Data type)	Description
Tag	player	- name (string) - age (int)	Represents the player.
Tag	team	- name (string)	Represents the team.
Edge type	serve	- start_year (int) - end_year (int)	Represent the players behavior. This behavior connects the player to the team, and the direction is from player to team.
Edge type	follow	- degree (int)	Represent the players behavior. This behavior connects the player to the player, and the direction is from a player to a player.

This figure shows the relationship (**serve/follow**) between a **player** and a **team**.

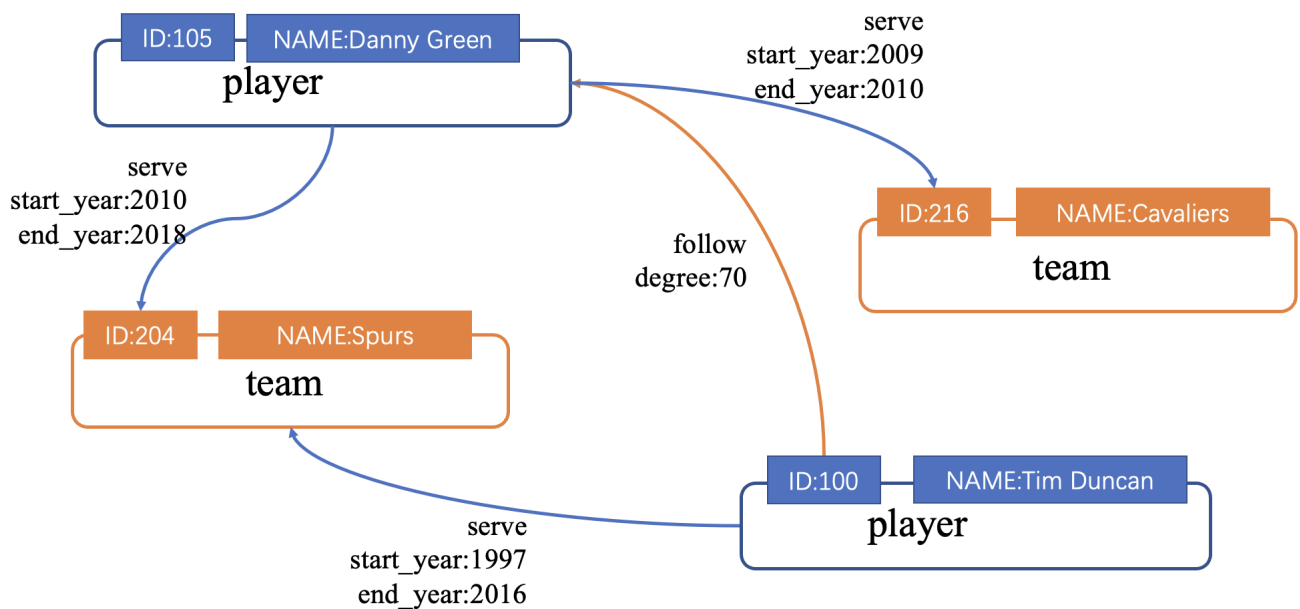

Last update: January 14, 2022

11.4.2 Create a schema

To batch import data into Nebula Graph, you must have a graph schema. You can create a schema on the **Console** page or on the **Schema** page of Studio.

Note

You can use nebula-console to create a schema. For more information, see [Nebula Graph Manual](#) and [Get started with Nebula Graph](#).

Prerequisites

To create a graph schema on Studio, you must do a check of these:

- Studio is connected to Nebula Graph.
- Your account has the privilege of GOD, ADMIN, or DBA.
- The schema is designed.
- A graph space is created.

Note

If no graph space exists and your account has the GOD privilege, you can create a graph space on the **Console** page. For more information, see [CREATE SPACE](#).

Create a schema with Schema


To create a schema on the **Schema** page, follow these steps:

1. Create tags. For more information, see [Operate tags](#).
2. Create edge types. For more information, see [Operate edge types](#).

Create a schema with Console

To create a schema on the **Console** page, follow these steps:

1. In the toolbar, click the **Console** tab.
2. In the **Current Graph Space** field, choose a graph space name. In this example, **basketballplayer** is used.

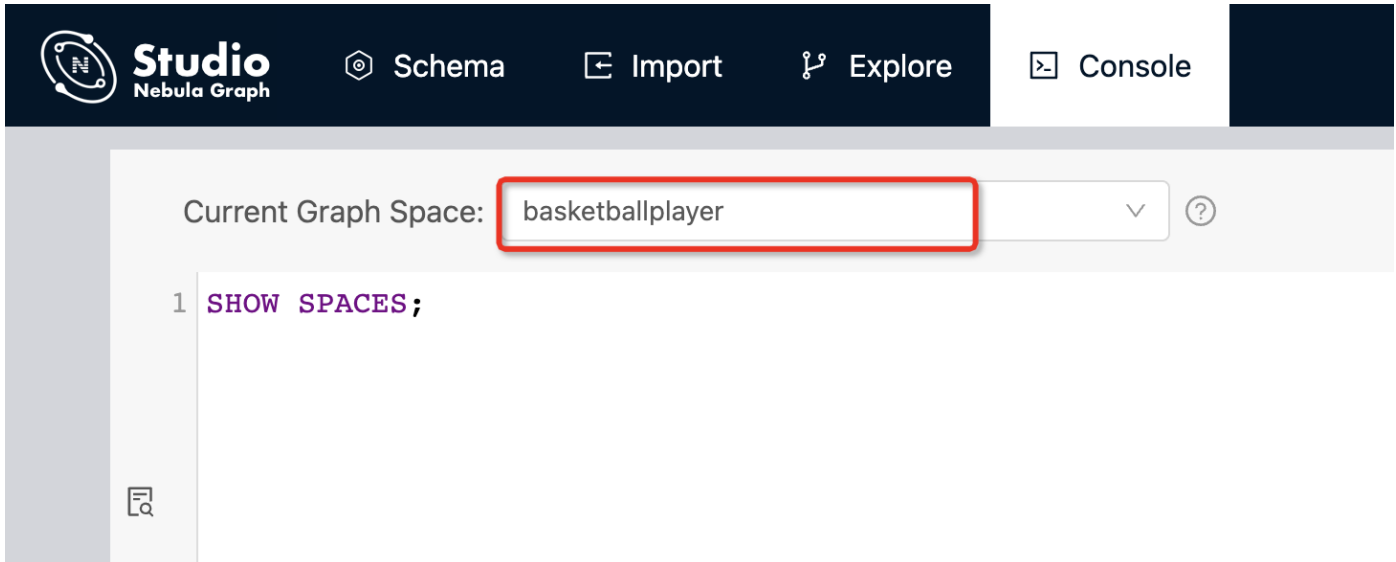

3. In the input box, enter these statements one by one and click the button .

```
// To create a tag named "player", with two property
nebula> CREATE TAG player(name string, age int);

// To create a tag named "team", with one property
nebula> CREATE TAG team(name string);

// To create an edge type named "follow", with one properties
nebula> CREATE EDGE follow(degree int);

// To create an edge type named "serve", with two properties
nebula> CREATE EDGE serve(start_year int, end_year int);
```

If the preceding statements are executed successfully, the schema is created. You can run the statements as follows to view the schema.

```
// To list all the tags in the current graph space
nebula> SHOW TAGS;

// To list all the edge types in the current graph space
nebula> SHOW EDGES;

// To view the definition of the tags and edge types
DESCRIBE TAG player;
DESCRIBE TAG team;
DESCRIBE EDGE follow;
DESCRIBE EDGE serve;
```

If the schema is created successfully, in the result window, you can see the definition of the tags and edge types.

Next to do

When a schema is created, you can [import data](#).

Last update: January 14, 2022

11.4.3 Import data

After CSV files of data and a schema are created, you can use the **Import** page to batch import vertex and edge data into Nebula Graph for graph exploration and data analysis.

Prerequisites

To batch import data, do a check of these:

- Studio is connected to Nebula Graph.
- A schema is created.
- CSV files meet the demands of the Schema.
- Your account has privilege of GOD, ADMIN, DBA, or USER.

Procedure

To batch import data, follow these steps:

1. In the toolbar, click the **Import** tab.
2. On the **Select Space** page, choose a graph space name. In this example, **basketballplayer** is used. And then click the **Next** button.
3. On the **Upload Files** page, click the **Upload Files** button and then choose CSV files. In this example, `edge_serve.csv`, `edge_follow.csv`, `vertex_player.csv`, and `vertex_team.csv` are chosen.

Note

You can choose multiple CSV files at the same time. The CSV file used in this article can be downloaded in the [Design a schema](#).

4. On the **Select Files** page, do a check of the file size and click **Preview** or **Delete** in the **Operations** column to make sure that all source data is correct. And then click the **Next** button.
5. On the **Map Vertices** page, click the **+ Bind Datasource** button, and in the dialog box, choose a CSV file. In this example, `vertex_player.csv` or `vertex_team.csv` is chosen.
6. In the **DataSource X** tab, click the **+ Tag** button.
7. In the **vertexId** section, do these operations:
 - a. In the **CSV Index** column, click **Mapping**.

- b. In the dialog box, choose a column from the CSV file. In this example, the only one cloumn of `vertex_player.csv` is chosen to generate VIDs representing players and the `playerID` column of `vertex_player.csv` is chosen to generate VIDs representing players.

!!! Note

In the same graph space, the VID is always unique and cannot be repeated. For VID information, see [\[VID\]\(../1.introduction/3.vid.md\)](#) "Click to enter the Nebula Graph Manual".

8. In the **TAG 1** section, do these operations:
 - a. In the **TAG** drop-down list, choose a tag name. In this example, **player** is used for the `vertex_player.csv` file, and **team** is used for the `vertex_team.csv` file.

b. In the property list, click **Mapping** to choose a data column from the CSV file as the value of a property. In this example, for the **player** tag, choose **Column 1** for the `age` property and set its type to **int**. And choose **Column 2** for the `name` property and set its type to **string**.

Prop ①	CSV Index ①	Type ①
name	* 2	string
age	* 1	int

9. (Optional) If necessary, repeat Step 5 through Step 8 for more tags.

10. When the configuration is done, click the **Next** button.

When **Config validation was successful** prompts, data mapping for the vertices is successful.

11. On the **Map Edges** page, click the **+ Bind Datasource** button, and in the dialog box, choose a CSV file. In this example, the `edge_follow.csv` file is chosen.

12. In the **Type** drop-down list, choose an edge type name. In this example, **follow** is chosen.

13. In the property list, click **Mapping** to choose a column from the `edge_follow.csv` file as values of a property for the edges. **srcId** and **dstId** are the VIDs of the source vertex and destination vertex of an edge. In this example, **srcId** must be set to the VIDs of the player and **dstId** must be set to the VIDs of another player. **Rank** is optional.

属性 ①	对应列标 ①	类型 ①
srcId	* 0	string
dstId	* 1	string
rank	选择	int
degree	* 2	int

14. When the configuration is done, click the **Next** button.

15. On the **Import** page, click the **Start Import** button. On the **log** window, you can see the import progress. The consumed time depends on the data volume. During data import, you can click the **Stop Import** button to stop data import. When the **log** window shows information as follows, the data import is done.

log
导入信息

上一步

终止导入

导入

```

2021/04/29 03:30:03 [INFO] connection_pool.go:74: [nebula-clients] connection pool is initialized successfully
2021/04/29 03:30:03 [INFO] clientmgr.go:28: Create 10 Nebula Graph clients
2021/04/29 03:30:03 [INFO] reader.go:64: Start to read file(1): /usr/local/nebula-graph-studio/tmp/upload/edge_follow.csv, schema: < :SRC_VID(string),:DST_VID(string),follow.degree:int >
2021/04/29 03:30:03 [INFO] reader.go:64: Start to read file(0): /usr/local/nebula-graph-studio/tmp/upload/vertex_player.csv, schema: < :VID(string),player.age:int,player.name:string >
2021/04/29 03:30:03 [INFO] reader.go:180: Total lines of file(/usr/local/nebula-graph-studio/tmp/upload/edge_follow.csv) is: 81, error lines: 0
2021/04/29 03:30:03 [INFO] reader.go:180: Total lines of file(/usr/local/nebula-graph-studio/tmp/upload/vertex_player.csv) is: 51, error lines: 0
2021/04/29 03:30:03 [INFO] statsmgr.go:61: Done(/usr/local/nebula-graph-studio/tmp/upload/edge_follow.csv): Time(0.03s), Finished(86), Failed(0), Latency AVG(8224us), Batches Req
AVG(10658us), Rows AVG(2551.09/s)
2021/04/29 03:30:03 [INFO] statsmgr.go:61: Done(/usr/local/nebula-graph-studio/tmp/upload/vertex_player.csv): Time(0.04s), Finished(132), Failed(0), Latency AVG(6979us), Batches Req
AVG(9115us), Rows AVG(3573.58/s)

```

Next to do

When the data are imported to v3.0.0, you can [query graph data](#).

Last update: February 16, 2022

11.4.4 Query graph data

When data is imported, you can use the **Console** page or the **Explore** page to query graph data.

Note

Users can also perform the following query operations online through **Studio**.

For example, if you want to query the edge properties of the player named `player100` to the team named `team204`, you can perform these optional operations:

- On the **Console** tab: Run `FETCH PROP ON serve "player100" -> "team204";`. The result window shows all the property information of this vertex. When the result returns, click the **View Subgraphs** button and then you can view the vertex information in a visualized way.

The screenshot shows the Console tab with a query: `$ FETCH PROP ON serve "player100" -> "team204";`. The result is displayed in a table view with one row. The table has a header `edges_` and a single data row: `[:serve "player100"->"team204" @0 {end_year: 2016, start_year: 1997}]`. On the right side of the table, there are two buttons: **Export CSV File** and **View Subgraphs** (highlighted with a red box). Below the table, it shows **Total 1** with navigation controls.

- On the **Explore** tab: Click the **Start with Vertices** button. In the dialog box, enter `player101` and then click the **Add** button. On the board, you can see the vertex. Move your mouse pointer on the vertex to see the vertex details, as shown in the preceding figure.

The screenshot shows the Explore tab with the **Current Graph Space** set to `basketballplayer`. On the left, a sidebar shows the details for **Vertex(1)** (highlighted in blue): `vid : "player101"`, `player.age : 36`, and `player.name : "Tony Parker"`. The main area shows a graph visualization with three vertices: a red circle at the top, an orange circle at the bottom left, and a red circle with a black border at the bottom right. An edge labeled `serve` connects the top red vertex to the orange vertex. A toolbar with various icons is visible above the graph.

Last update: February 9, 2022

11.5 Operation guide

11.5.1 Use Schema

Operate graph spaces

When Studio is connected to Nebula Graph, you can create or delete a graph space. You can use the **Console** page or the **Schema** page to do these operations. This article only introduces how to use the **Schema** page to operate graph spaces in Nebula Graph.

STUDIO VERSION

Studio of v3.2.0 or later versions supports this function. For more information, see [check updates](#).

PREREQUISITES

To operate a graph space on the **Schema** page of Studio, you must do a check of these:

- Studio is connected to Nebula Graph.
- Your account has the authority of GOD. It means that:
 - If the authentication is enabled in Nebula Graph, you can use `root` and any password to sign in to Studio.
 - If the authentication is disabled in Nebula Graph, you must use `root` and its password to sign in to Studio.

CREATE A GRAPH SPACE

To create a graph space on the **Schema** page, follow these steps:

1. In the toolbar, click the **Schema** tab.
2. On the **Graph Space List** page, click the **+ Create** button.
3. On the **Create** page, do these settings:
 - **Name:** Specify a name to the new graph space. In this example, `basketballplayer` is used. The name must be distinct in the database. The name cannot be used keywords or reserved keywords as identifiers. For more information, see [keywords](#).
 - **Vid type:** The data types of VIDs are restricted to `FIXED_STRING(<N>)` or `INT64`. A graph space can only select one VID type. In this example, `FIXED_STRING(32)` is used. For more information, see [VID](#).
 - **Comment:** The remarks of a certain property or the space itself. The maximum length is 256 bytes. By default, there will be no comments on a space. But in this example, `Statistics of basketball players` is used.
 - **Optional Parameters:** Set the values of `partition_num` and `replica_factor` respectively. In this example, these parameters are set to `100` and `1` respectively. For more information, see [CREATE SPACE syntax](#).

In the **Equivalent to the following nGQL statement** panel, you can see the statement equivalent to the preceding settings.

```
CREATE SPACE basketballplayer (partition_num = 100, replica_factor = 1, vid_type = FIXED_STRING(32)) COMMENT = "Statistics of basketball players"
```

4. Confirm the settings and then click the **+ Create** button. If the graph space is created successfully, you can see it on the graph space list.

Graph Space List / Create

* Name:

* vid type:

Comment:

Optional Parameters

partition_num:

replica_factor:

View nGQL


```
1 CREATE SPACE basketballplayer (partition_num = 100, replica_factor = 1, vid_type = FIXED_STRING(32)) COMMENT = "Statistics of basketball players"
```

DELETE A GRAPH SPACE

Danger


Deleting the space will delete all the data in it, and the deleted data cannot be restored if it is not **backed up**.

To delete a graph space on the **Schema** page, follow these steps:

1. In the toolbar, click the **Schema** tab.
2. In the graph space list, find a graph space and then the button  in the **Operations** column.

Graph Space List

[+ Create](#)

No.	Name	partition_num	replica_factor	charset	collate	Vid Type	Operations
1	basketballplayer	100	1	utf8	utf8_bin	FIXED_STRING(32)	

[1](#)

3. On the dialog box, confirm the information and then click the **OK** button. When the graph space is deleted successfully, it is removed from the **graph space list**.

NEXT TO DO

After a graph space is created, you can create or edit a schema, including:

- Operate tags
- Operate edge types
- Operate indexes

Last update: January 14, 2022

Operate tags

After a graph space is created in Nebula Graph, you can create tags. With Studio, you can use the **Console** page or the **Schema** page to create, retrieve, update, or delete tags. This topic introduces how to use the **Schema** page to operate tags in a graph space only.

STUDIO VERSION

Studio of v3.2.0 or later versions supports this function. For more information, see [check updates](#).



PREREQUISITES

To operate a tag on the **Schema** page of Studio, you must do a check of these:

- Studio is connected to Nebula Graph.
- A graph space is created.
- Your account has the authority of GOD, ADMIN, or DBA.

CREATE A TAG

To create a tag on the **Schema** page, follow these steps:

1. In the toolbar, click the **Schema** tab.
2. In the **Graph Space List** page, find a graph space, and then click its name or the button  in the **Operations** column.
3. In the **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
4. Click the **Tag** tab and click the **+ Create** button.
5. On the **Create** page, do these settings:
 - a. **Name:** Specify an appropriate name for the tag. In this example, `course` is specified.
 - b. (Optional) If necessary, in the upper left corner of the **Define Properties** panel, click the check box to expand the panel and do these settings:
 - To define a property: Enter a property name, a data type, and a default value.
 - To add multiple properties: Click the **Add Property** button and define more properties.
 - To cancel a defined property: Besides the **Defaults** column, click the button .
 - c. (Optional) If no index is set for the tag, you can set the TTL configuration: In the upper left corner of the **Set TTL** panel, click the check box to expand the panel and configure `TTL_COL` and `TTL_DURATION`. For more information about both parameters, see [TTL configuration](#).
6. When the preceding settings are completed, in the **Equivalent to the following nGQL statement** panel, you can see the nGQL statement equivalent to these settings.

Schema
Import
Explore
Console
Language: Engl...
Setting
Help
Star 4,593
v1.2.0-beta

Current Graph Space: mooc_actions
Graph Space List

Tag
Tag / List / Create
Back to Tag List

Edge Type
Index

* Name course

☒ Define Properties

Property Name	Data Type	Defaults
* courseId	int	Please enter the d...
* courseName	string	Please enter the d...

Add Property

☐ Set TTL

Equivalent to the following nGQL statement

```

1 CREATE TAG course (courseId int , courseName string )



```

+ Create

7. Confirm the settings and then click the **+ Create** button. When the tag is created successfully, the **Define Properties** panel shows all its properties on the list.

EDIT A TAG

To edit a tag on the **Schema** page, follow these steps:



1. In the toolbar, click the **Schema** tab.
2. In the **Graph Space List** page, find a graph space, and then click its name or the button  in the **Operations** column.
3. In **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
4. Click the **Tag** tab, find a tag and then the button  in the **Operations** column.
5. On the **Edit** page, do these settings:
 - To edit a Comment: Click **Edit** under the **Name**.
 - To edit a property: On the **Define Properties** panel, find a property, click **Edit**, and then change the data type or the default value.
 - To delete a property: On the **Define Properties** panel, find a property and then click **Delete**.
 - To add more properties: On the **Define Properties** panel, click the **Add Property** button to add a new property.
 - To set the TTL configuration: In the upper left corner of the **Set TTL** panel, click the check box and then set the TTL configuration.
 - To edit the TTL configuration: On the **Set TTL** panel, click **Edit** and then change the configuration of `TTL_COL` and `TTL_DURATION`.
 - To delete the TTL configuration: When the **Set TTL** panel is expanded, in the upper left corner of the panel, click the check box to delete the configuration.
6. When the configuration is done, in the **Equivalent to the following nGQL statement** panel, you can see the equivalent `ALTER TAG` statement.

DELETE A TAG

Danger

Confirm the **impact** before deleting the tag. The deleted data cannot be restored if it is not **backed up**.

To delete a tag on the **Schema** page, follow these steps:

1. In the toolbar, click the **Schema** tab.
2. In **Graph Space List**, find a graph space, and then click its name or the button  in the **Operations** column.
3. In the **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
4. Click the **Tag** tab, find a tag and then the button  in the **Operations** column.
5. Click **OK**.

NEXT TO DO

After the tag is created, you can use the **Console** page to insert vertex data one by one manually or use the **Import** page to bulk import vertex data.

Last update: February 16, 2022

Operate edge types

After a graph space is created in Nebula Graph, you can create edge types. With Studio, you can choose to use the **Console** page or the **Schema** page to create, retrieve, update, or delete edge types. This topic introduces how to use the **Schema** page to operate edge types in a graph space only.

STUDIO VERSION

Studio of v3.2.0 or later versions supports this function. For more information, see [check updates](#).



PREREQUISITES


To operate an edge type on the **Schema** page of Studio, you must do a check of these:

- Studio is connected to Nebula Graph.
- A graph space is created.
- Your account has the authority of GOD, ADMIN, or DBA.

CREATE AN EDGE TYPE

To create an edge type on the **Schema** page, follow these steps:

1. In the toolbar, click the **Schema** tab.
2. In the **Graph Space List** page, find a graph space and then click its name or click the button  in the **Operations** column.
3. In the **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
4. Click the **Edge Type** tab and click the **+ Create** button.
5. On the **Create** page, do these settings:
 - **Name:** Specify an appropriate name for the edge type. In this example, `serve` is used.
 - (Optional) If necessary, under the name, click the **Comment** to input content.
 - (Optional) If necessary, in the upper left corner of the **Define Properties** panel, click the check box to expand the panel and do these settings:
 - To define a property: Enter a property name, a data type, and a default value.
 - To add multiple properties: Click the **Add Property** button and define more properties.
 - To delete a defined property: Besides the **Defaults** column, click the button .
 - (Optional) If no index is set for the edge type, you can set the TTL configuration: In the upper left corner of the **Set TTL** panel, click the check box to expand the panel, and configure `TTL_COL` and `TTL_DURATION`. For more information about both parameters, see [TTL configuration](#).
6. When the preceding settings are completed, in the **Equivalent to the following nGQL statement** panel, you can see the nGQL statement equivalent to these settings.


Schema
Import
Explore
Console
Language: English
Setting
Help
Star 695
v3.0.0

Current Graph Space: basketballplayer
Graph Space List

Tag

Edge Type

 Index

Edge Type / List / Create
 Back to Edge Type List

Name:

Comment:

☒ Define Properties

Property Name	Data Type	Allow Null	Defaults	Comment
* <input type="text" value="start_year"/>	* <input type="text" value="int"/>	<input checked="" type="checkbox"/>	<input data-bbox="970 645 1086 667" type="text" value="Please enter th..."/>	<input data-bbox="1201 645 1297 667" type="text" value=""/> ⊖
* <input type="text" value="end_year"/>	* <input type="text" value="int"/>	<input checked="" type="checkbox"/>	<input data-bbox="970 696 1086 719" type="text" value="Please enter th..."/>	<input data-bbox="1201 696 1297 719" type="text" value=""/> ⊖
* <input type="text" value="teamID"/>	* <input type="text" value="string"/>	<input checked="" type="checkbox"/>	<input data-bbox="970 748 1086 770" type="text" value="Please enter th..."/>	<input data-bbox="1201 748 1297 770" type="text" value=""/> ⊖
* <input type="text" value="playerID"/>	* <input type="text" value="string"/>	<input checked="" type="checkbox"/>	<input data-bbox="970 799 1086 822" type="text" value="Please enter th..."/>	<input data-bbox="1201 799 1297 822" type="text" value=""/> ⊖

Add Property

☐ Set TTL



View nGQL

```
1 CREATE EDGE serve (start_year int NULL , end_year int NULL , teamID string NULL , playerID string NULL ) COMMENT = "Players serve the team"
```

7. Confirm the settings and then click the **+ Create** button. When the edge type is created successfully, the **Define Properties** panel shows all its properties on the list.

EDIT AN EDGE TYPE

To edit an edge type on the **Schema** page, follow these steps:



1. In the toolbar, click the **Schema** tab.
2. In the **Graph Space List** page, find a graph space and then click its name or click the button  in the **Operations** column.
3. In the **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
4. Click the **Edge Type** tab, find an edge type and then click the button  in the **Operations** column.
5. On the **Edit** page, do these operations:
 - To edit a Comment: Click **Edit** under the Name.
 - To edit a property: On the **Define Properties** panel, find a property, click **Edit**, and then change the data type or the default value.
 - To delete a property: On the **Define Properties** panel, find a property, click **Delete**.
 - To add more properties: On the **Define Properties** panel, click the **Add Property** button to add a new property.
 - To set the TTL configuration: In the upper left corner of the **Set TTL** panel, click the check box and then set TTL.
 - To edit the TTL configuration: On the **Set TTL** panel, click **Edit** and then change the configuration of `TTL_COL` and `TTL_DURATION`.
 - To delete the TTL configuration: When the **Set TTL** panel is expanded, in the upper left corner of the panel, click the check box to delete the configuration.
6. When the configuration is done, in the **Equivalent to the following nGQL statement** panel, you can see the equivalent `ALTER EDGE` statement.

DELETE AN EDGE TYPE

Danger

Confirm the **impact** before deleting the Edge type. The deleted data cannot be restored if it is not **backed up**.

To delete an edge type on the **Schema** page, follow these steps:

1. In the toolbar, click the **Schema** tab.
2. In **Graph Space List**, find a graph space and then click its name or click the button  in the **Operations** column.
3. In the **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
4. Click the **Edge Type** tab, find an edge type and then click the button  in the **Operations** column.
5. Click **OK** to confirm in the pop-up dialog box.

NEXT TO DO

After the edge type is created, you can use the **Console** page to insert edge data one by one manually or use the **Import** page to bulk import edge data.

Last update: January 14, 2022

Operate Indexes

You can create an index for a Tag and/or an Edge type. An index lets traversal start from vertices or edges with the same property and it can make a query more efficient. You can create two index types: Tag Index and Edge type Index. With Studio, you can use the **Console** page or the **Schema** page to create, retrieve, and delete indexes. This topic introduces how to use the **Schema** page to operate an index only.

Note

You can create an index when a Tag or an Edge Type is created. But an index can decrease the write speed during data import. We recommend that you import data firstly and then create and rebuild an index. For more information, see [nGQL Manual](#).

STUDIO VERSION

Studio of v3.2.0 or later versions supports this function. For more information, see [check updates](#).


PREREQUISITES

To operate an index on the **Schema** page of Studio, you must do a check of these:

- Studio is connected to Nebula Graph.
- A graph Space, Tags, and Edge Types are created.
- Your account has the authority of GOD, ADMIN, or DBA.

CREATE AN INDEX

To create an index on the **Schema** page, follow these steps:

1. In the toolbar, click the **Schema** tab.
2. On the **Graph Space List** page, find a graph space, and then click its name or the button  in the **Operations** column.
3. In the **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
4. Click the **Index** tab and then click the **+ Create** button.

5. On the **Create** page, do these settings:

- **Index Type:** Choose to create an index for a tag or for an edge type. In this example, **Edge Type** is chosen.
- **Name:** Choose a tag name or an edge type name. In this example, **follow** is chosen.
- **Index Name:** Specify a name for the new index. In this example, **follow_index** is used.
- **Indexed Properties:** Click **Add**, and then, in the dialog box, choose a property. If necessary, repeat this step to choose more properties. You can drag the properties to sort them. In this example, **degree** is chosen.

Note

The order of the indexed properties has an effect on the result of the `LOOKUP` statement. For more information, see [nGQL Manual](#).

- **Comment:** The remarks of a certain property or the index itself. The maximum length is 256 bytes. By default, there will be no comments on an index. But in this example, `follow_index` is used.
6. When the settings are done, the **Equivalent to the following nGQL statement** panel shows the statement equivalent to the settings.

Schema Import Explore Console Language: English Setting Help Star 4,595 v1.2.0-beta

Current Graph Space: mooc_actions < Graph Space List

Tag Index / List / Create < Back to Index List

Edge Type

Index

* Index Type: Edge Type

* Name: action

* Index Name: action_index

* Indexed Properties: actionId X label X Add
(Drag to Sort)

Equivalent to the following nGQL statement


```
1 CREATE EDGE INDEX action_index ON action(actionId, label)
```

+ Create

7. Confirm the settings and then click the **+ Create** button. When an index is created, the index list shows the new index.



VIEW INDEXES

To view indexes on the **Schema** page, follow these steps:

1. In the toolbar, click the **Schema** tab.
2. In the graph space list, find a graph space, and then click its name or the button  in the **Operations** column.
3. In the **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
4. Click the **Index** tab, in the upper left corner, choose an index type, **Tag** or **Edge Type**.
5. In the list, find an index and click its row. All its details are shown in the expanded row.

DELETE AN INDEX

To delete an index on **Schema**, follow these steps:


1. In the toolbar, click the **Schema** tab.
 2. In the graph space list, find a graph space, and then click its name or the button  in the **Operations** column.
 3. In the **Current Graph Space** field, confirm the name of the graph space. If necessary, you can choose another name to change the graph space.
 4. Click the **Index** tab, find an index and then the button  in the **Operations** column.
 5. Click **OK** to confirm in the pop-up dialog box.
-


Last update: February 16, 2022


11.5.2 Use Console


Console


Studio console interface as shown in following.

**Studio**
Nebula Graph


1  Schema

 Import

 Explore

 Console

Language: Engli... Setting Help Star 7,078 v3.2.0




2 Current Graph Space: basketballplayer 

3

p1 => "Tim Duncan"

4

```
1 MATCH (v:player{name:$p1})-[:follow]->(n) RETURN v,n;
```

5  6  7 

8

```
$ MATCH (v:player{name:$p1})-[:follow]->(n) RETURN v,n;
```






9

10 Export CSV File 11 View Subgraphs

v	n
("player100":player{age: 42, name: "Tim Duncan"})	("player125":player{age: 41, name: "Manu Ginobili"})
("player100":player{age: 42, name: "Tim Duncan"})	("player101":player{age: 36, name: "Tony Parker"})

Total 2 < 1 >

The following table lists various functions on the console interface.

number	function	descriptions
1	toolbar	Click the Console tab to enter the console page.
2	select a space	Select a space in the Current Graph Space list. descriptions: Studio does not support running the <code>USE <space_name></code> statements directly in the input box.
3	custom parameters display	Click the  button to expand the custom parameters for parameterized query. For details, see Manage parameters .
4	input box	After inputting the nGQL statements, click the  button to run the statement. You can input multiple statements and run them at the same time, separated by <code>;</code> .
5	clean input box	Click  button to clear the content entered in the input box.
6	history list	Click  button representing the statement record. In the statement running record list, click one of the statements, and the statement will be automatically entered in the input box. The list provides the record of the last 15 statements.
7	run	After inputting the nGQL statement in the input box, click  button to indicate the operation to start running the statement.
9	statement running status	After running the nGQL statement, the statement running status is displayed. If the statement runs successfully, the statement is displayed in green. If the statement fails, the statement is displayed in red.
9	result window	Display the results of the statement execution. If the statement returns results, the results window will display the returned results in tabular form.
10	export CSV file	After running the nGQL statement and return the result, click the Export CSV File button to export the result as a CSV file.
11	open in explore	According to the running nGQL statement, the user can click the graph exploration function key to import the returned results into graph exploration for visual display, such as open in explore and view subgraphs .

Last update: February 16, 2022

Open in Explore

With the **Open in Explore** function, you can run nGQL statements on the **Console** page to query vertex or edge data and then view the result on the **Explore** page in a visualized way.

SUPPORTED VERSIONS

Studio of v3.2.0 or later versions supports this function. For more information, see [check updates](#).


PREREQUISITES

To use the **Open in Explore** function, you must do a check of these:

- Studio is connected to Nebula Graph. For more information, see [Connect to Nebula Graph](#).
- A dataset exists in the database. For more information, see [Import data](#).

QUERY AND VISUALIZE EDGE DATA

To query edge data on the **Console** page and then view the result on the **Explore** page, follow these steps:

1. In the toolbar, click the **Console** tab.
2. In the **Current Graph Space** field, choose a graph space name. In this example, **basketballplayer** is chosen.
3. In the input box, enter an nGQL statement and click the button .

Note

The query result must contain the VIDs of the source vertex and the destination vertex of an edge.

Here is an nGQL statement example.

```
nebulagraph> GO FROM "player102" OVER serve YIELD src(edge),dst(edge);
```

In the query result, you can see the start year and end year of the service team for the player whose playerId is `player102`. As shown below.

```
$ MATCH (u:user {userId: 1}) - [:action] -> (c) RETURN u.userId AS UserID, c.courseName AS Course;
```

Table

Export CSV File

Open In Explore

UserID	Course
1	History of Ecology
1	Women in Islam

4. Click the **Open in Explore** button.
5. In the dialog box, configure as follows:
 - a. Click **Edge Type**.
 - b. In the **Edge Type** field, enter an edge type name. In this example, `serve` is used.
 - c. In the **Src ID** field, choose a column name from the result table representing the VIDs of the source vertices. In this example, `serve._src` is chosen.
 - d. In the **Dst ID** field, choose a column name from the result table representing the VIDs of the destination vertices. In this example, `serve._dst` is chosen.
 - e. (Optional) If the result table contains the ranking information of the edges, in the **Rank** field, choose a column name representing the `rank` of the edges. If no ranking information exists in the result, leave the **Rank** field blank.
 - f. When the configuration is done, click the **Import** button.



Vertex

Edge Type

Please choose the columns representing source vertex ID, destination vertex ID, and rank of an edge

* Edge Type:

serve

* Src ID:

serve._src



* Dst ID:

serve._dst



Rank:




Import

6. If some data exists on the board of **Explore**, choose a method to insert data:


- **Incremental Insertion:** Click this button to add the result to the existing data on the board.
- **Insert After Clear:** Click this button to clear the existing data from the board and then add the data to the board.

When the data is inserted, you can view the visualized representation of the edge data.

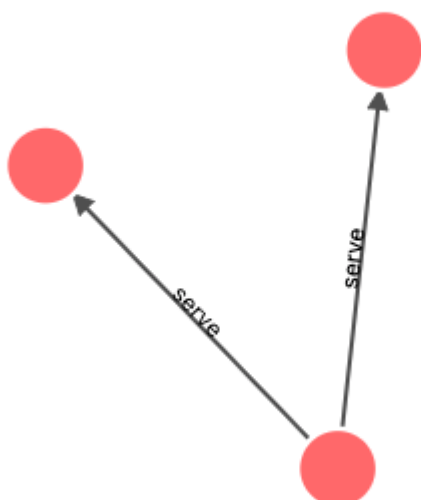

QUERY AND VISUALIZE VERTEX DATA

To query vertex data on the **Console** page and then view the result on the **Explore** page, follow these steps:

1. In the toolbar, click the **Console** tab.
2. In the **Current Graph Space** field, choose a graph space name. In this example, **basketballplayer** is chosen.
3. In the input box, enter an nGQL statement and click the button .

Note

The query result must contain the VIDs of the vertices.

Here is an nGQL statement example.

```
nebula> FETCH PROP ON player "player100" YIELD properties(vertex).name;
```

The query result gives the information of the player whose `playerId` is `player100`, as shown in this figure.

```
$ FETCH PROP ON player "player100" YIELD player.name;
```

表格

导出CSV文件

导入图探索

VertexID	player.name
player100	Tim Duncan

共计 1 < 1 >

4. Click the **Open in Explore** button.
5. In the dialog box, configure as follows:
 - a. Click **Vertex**.
 - b. In the **Vertex ID** field, choose a column name from the result table representing the VIDs of the vertices. In this example, `VertexID` is chosen.
 - c. When the configuration is done, click the **Import** button.

X

Vertex

Edge Type

Please choose the column representing vertex IDs from the table

* vid: VertexID

Import

6. If some data exists on the board of **Explore**, choose a method to insert data:

- **Incremental Insertion:** Click this button to add the queried result to the existing data on the board.
- **Insert After Clear:** Click this button to clear the existing data from the board and then add the data.

When the data is inserted, you can view the visualized representation of the vertex data.

NEXT TO DO

On the **Explore** page, you can expand the board to explore and analyze graph data.

Last update: January 14, 2022

View subgraphs

With the **View Subgraphs** function, you can run a `FIND SHORTEST | ALL PATH` or a `GET SUBGRAPH` statement on the **Console** page and then view the result on the **Explore** page.

STUDIO VERSION

Studio of v3.2.0 supports this function. To update the version, see [Check updates](#).

PREREQUISITES

To use the **View Subgraphs** function, you must do a check of these:


- The version of Studio is v3.2.0 or later.
- Studio is connected to Nebula Graph.
- A dataset exists in the database. In the example of this article, the **basketballplayer** dataset is used. For more information, see [Import data](#).

Note

Users can view subgraphs online in [Studio](#).

PROCEDURE


To query the paths or subgraph on the **Console** page and then view them on the **Explore** page, follow these steps:

1. In the navigation bar, click the **Console** tab.
2. In the **Current Graph Space** dropdown list, choose a graph space name. In this example, **basketballplayer** is chosen.
3. In the input box, enter a `FIND SHORTEST PATH`, `FIND ALL PATH`, or `GET SUBGRAPH` statement and click **Run** .

Here is an nGQL statement example.

```
nebula> FIND ALL PATH FROM "player114" to "player100" OVER follow YIELD path AS p;
```

Take the `FIND ALL PATH` for example, query the path information as shown in this figure.

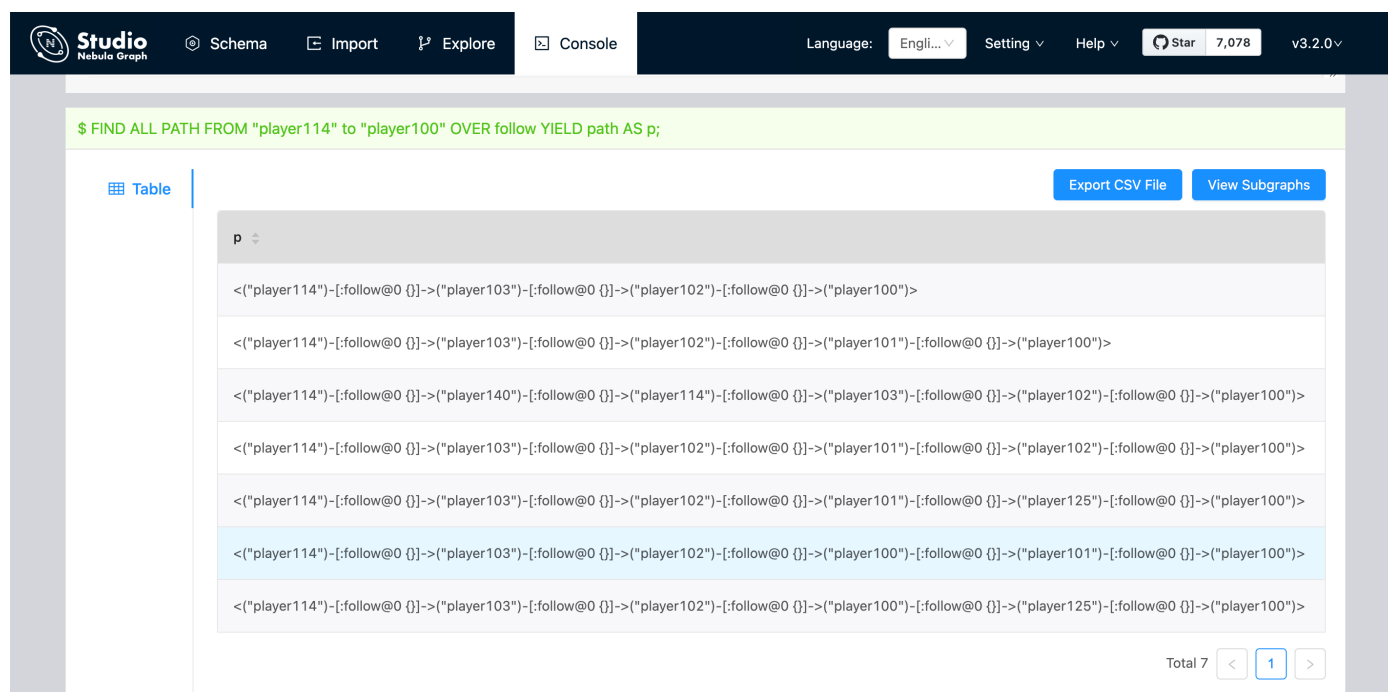

The screenshot shows the Nebula Studio interface. The top navigation bar includes 'Schema', 'Import', 'Explore', and 'Console' (selected). The 'Console' tab displays a query: `$ FIND ALL PATH FROM "player114" to "player100" OVER follow YIELD path AS p;`. Below the query, a table of results is shown. The table has a single column 'p' containing 7 rows of paths. The first row is highlighted in blue. Buttons for 'Export CSV File' and 'View Subgraphs' are visible. At the bottom right, it says 'Total 7' with a pagination control showing '1'.

p
<("player114")-[:follow@0 {}]->("player103")-[:follow@0 {}]->("player102")-[:follow@0 {}]->("player100")>
<("player114")-[:follow@0 {}]->("player103")-[:follow@0 {}]->("player102")-[:follow@0 {}]->("player101")-[:follow@0 {}]->("player100")>
<("player114")-[:follow@0 {}]->("player140")-[:follow@0 {}]->("player114")-[:follow@0 {}]->("player103")-[:follow@0 {}]->("player102")-[:follow@0 {}]->("player100")>
<("player114")-[:follow@0 {}]->("player103")-[:follow@0 {}]->("player102")-[:follow@0 {}]->("player101")-[:follow@0 {}]->("player102")-[:follow@0 {}]->("player100")>
<("player114")-[:follow@0 {}]->("player103")-[:follow@0 {}]->("player102")-[:follow@0 {}]->("player101")-[:follow@0 {}]->("player125")-[:follow@0 {}]->("player100")>
<("player114")-[:follow@0 {}]->("player103")-[:follow@0 {}]->("player102")-[:follow@0 {}]->("player100")-[:follow@0 {}]->("player101")-[:follow@0 {}]->("player100")>
<("player114")-[:follow@0 {}]->("player103")-[:follow@0 {}]->("player102")-[:follow@0 {}]->("player100")-[:follow@0 {}]->("player125")-[:follow@0 {}]->("player100")>

4. Click the **View Subgraphs** button.
5. (Optional) If some data exists on the board of **Explore**, choose a method to insert data:
 - **Incremental Insertion:** Click this button to add the result to the existing data on the board.
 - **Insert After Clear:** Click this button to clear the existing data from the board and then add the data to the board.

When the data is inserted, you can view the visualized representation of the paths. Operations such as expanding vertices, moving the canvas, modifying the color and icon of the vertices, and displaying the properties of the vertices and edges on the page are supported.

Studio
Nebula Graph

[Schema](#)
[Import](#)
[Explore](#)
[Console](#)

Language: Engli...
 Setting
 Help
 Star 7,078
 v3.2.0

Current Graph Space: basketballplayer
Clear
Start with Vertices
Export

Vertex(0)
 Edge(0)

No data currently selected

Export Vertices to CSV

* Edge Type
 follow x serve x

* Direction
 Outgoing

* Steps
 Single
 Range
 1

* Vertex Color/Icon
 Group by vertex tag
 Custom Color/Icon

Query Limit
 100

Custom filter conditions [Reset](#)
 + Add condition

Expand

NEXT TO DO

On the **Explore** page, you can expand the graph to explore and analyze graph data.

Last update: February 16, 2022

11.6 Troubleshooting

11.6.1 Connecting to the database error

Problem description

According to the [connect Studio](#) operation, it prompts **failed**.

Possible causes and solutions

You can troubleshoot the problem by following the steps below.

STEP1: CONFIRM THAT THE FORMAT OF THE HOST FIELD IS CORRECT

You must fill in the IP address (`graph_server_ip`) and port of the Nebula Graph database Graph service. If no changes are made, the port defaults to `9669` . Even if Nebula Graph and Studio are deployed on the current machine, you must use the local IP address instead of `127.0.0.1` , `localhost` OR `0.0.0.0` .

STEP2: CONFIRM THAT THE USERNAME AND PASSWORD ARE CORRECT

If authentication is not enabled, you can use root and any password as the username and its password.

If authentication is enabled and different users are created and assigned roles, users in different roles log in with their accounts and passwords.

STEP3: CONFIRM THAT NEBULA GRAPH SERVICE IS NORMAL

Check Nebula Graph service status. Regarding the operation of viewing services:

- If you compile and deploy Nebula Graph on a Linux server, refer to the [Nebula Graph service](#).
- If you use Nebula Graph deployed by Docker Compose and RPM, refer to the [Nebula Graph service status and ports](#).

If the Nebula Graph service is normal, proceed to Step 4 to continue troubleshooting. Otherwise, please restart Nebula Graph service.

Note

If you used `docker-compose up -d` to start Nebula Graph before, you must run the `docker-compose down` to stop Nebula Graph.

STEP4: CONFIRM THE NETWORK CONNECTION OF THE GRAPH SERVICE IS NORMAL

Run a command (for example, `telnet 9669`) on the Studio machine to confirm whether Nebula Graph's Graph service network connection is normal.

If the connection fails, check according to the following steps:

- If Studio and Nebula Graph are on the same machine, check if the port is exposed.
- If Studio and Nebula Graph are not on the same machine, check the network configuration of the Nebula Graph server, such as firewall, gateway, and port.

If you cannot connect to the Nebula Graph service after troubleshooting with the above steps, please go to the [Nebula Graph forum](#) for consultation.

Last update: January 14, 2022

11.6.2 Cannot access to Studio

Problem description

I follow the document description and visit `127.0.0.1:7001` or `0.0.0.0:7001` after starting Studio, why can't I open the page?

Possible causes and solutions

You can troubleshoot the problem by following the steps below.

STEP1: CONFIRM SYSTEM ARCHITECTURE

It is necessary to confirm whether the machine where the Studio service is deployed is of x86_64 architecture. Currently, Studio only supports x86_64 architecture.

STEP2: CHECK IF THE STUDIO SERVICE STARTS NORMALLY

Run `docker-compose ps` to check if the service has started normally.

If the service is normal, the return result is as follows. Among them, the `State` column should all be displayed as `Up`.

Name	Command	State	Ports
nebula-web-docker_client_1	./nebula-go-api	Up	0.0.0.0:32782->8080/tcp
nebula-web-docker_importer_1	nebula-importer --port=569 ...	Up	0.0.0.0:32783->5699/tcp
nebula-web-docker_nginx_1	/docker-entrypoint.sh nginx ...	Up	0.0.0.0:7001->7001/tcp, 80/tcp
nebula-web-docker_web_1	docker-entrypoint.sh npm r ...	Up	0.0.0.0:32784->7001/tcp

If the above result is not returned, stop Studio and restart it first. For details, refer to [Deploy Studio](#).

Note

If you used `docker-compose up -d` to start Nebula Graph before, you must run the `docker-compose down` to stop Nebula Graph.

STEP3: CONFIRM ADDRESS

If Studio and the browser are on the same machine, users can use `localhost:7001`, `127.0.0.1:7001` or `0.0.0.0:7001` in the browser to access Studio.

If Studio and the browser are not on the same machine, you must enter `<studio_server_ip>:7001` in the browser. Among them, `studio_server_ip` refers to the IP address of the machine where the Studio service is deployed.

STEP4: CONFIRM NETWORK CONNECTION

Run `curl <studio_server_ip>:7001 -I` to confirm if it is normal. If it returns `HTTP/1.1 200 OK`, it means that the network is connected normally.

If the connection is refused, check according to the following steps:

If the connection fails, check according to the following steps:

- If Studio and Nebula Graph are on the same machine, check if the port is exposed.
- If Studio and Nebula Graph are not on the same machine, check the network configuration of the Nebula Graph server, such as firewall, gateway, and port.

If you cannot connect to the Nebula Graph service after troubleshooting with the above steps, please go to the [Nebula Graph forum](#) for consultation.

Last update: January 14, 2022

11.6.3 FAQ

Why can't I use a function?

If you find that a function cannot be used, it is recommended to troubleshoot the problem according to the following steps:

1. Confirm that Nebula Graph is the latest version. If you use Docker Compose to deploy the Nebula Graph database, it is recommended to run `docker-compose pull && docker-compose up -d` to pull the latest Docker image and start the container.
2. Confirm that Studio is the latest version. For more information, refer to [check updates](#).
3. Search the [nebula forum](#), [nebula](#) and [nebula-studio](#) projects on the GitHub to confirm if there are already similar problems.
4. If none of the above steps solve the problem, you can submit a problem on the forum.

Last update: January 14, 2022

12. Nebula Dashboard Community Edition

12.1 What is Nebula Dashboard Community Edition

Nebula Dashboard Community Edition (Dashboard for short) is a visualization tool that monitors the status of machines and services in Nebula Graph clusters. This topic introduces Dashboard Community Edition. For details of Dashboard Enterprise Edition, refer to [What is Nebula Dashboard Enterprise Edition](#).

Enterpriseonly

Dashboard Enterprise Edition adds features such as visual cluster creation, batch import of clusters, fast scaling, etc. For more information, see [Pricing](#).

12.1.1 Features

Dashboard monitors:

- The status of all the machines in clusters, including CPU, memory, load, disk, and network.
- The information of all the services in clusters, including the IP addresses, versions, and monitoring metrics (such as the number of queries, the latency of queries, the latency of heartbeats, and so on).
- The information of clusters, including the information of services, partitions, configurations, and long-term tasks.
- Features of the enterprise package (TODO: planning)

12.1.2 Scenarios

You can use Dashboard in one of the following scenarios:

- You want to monitor key metrics conveniently and quickly, and present multiple key information of the business to ensure the business operates normally.
- You want to monitor clusters from multiple dimensions (such as the time, aggregate rules, and metrics).
- After a failure occurs, you need to review it and confirm its occurrence time and unexpected phenomena.

12.1.3 Precautions

- The monitoring data will be updated per 7 seconds by default.
- The monitoring data will be retained for 14 days by default, that is, only the monitoring data within the last 14 days can be queried.

Note

The monitoring service is supported by Prometheus. The update frequency and retention intervals can be modified. For details, see [Prometheus](#).

12.1.4 Version compatibility

The version correspondence between Nebula Graph and Dashboard Community Edition is as follows.

Nebula Graph version	Dashboard version
2.5.1~3.0.0	1.1.0
2.0.1~2.5.1	1.0.2
2.0.1~2.5.1	1.0.1

12.1.5 Release note

Release

Last update: January 18, 2022

12.2 Deploy Dashboard

The deployment of Dashboard involves five services. This topic will describe how to deploy Dashboard in detail. To download and compile the latest source code of Nebula Dashboard, follow the instructions on the [nebula dashboard GitHub page](#).

12.2.1 Prerequisites

Before you deploy Dashboard, you must confirm that:

- The Nebula Graph services are deployed and started. For more information, see [Nebula Graph Database Manual](#).
- Before the installation starts, the following ports are not occupied.
- 9200
- 9100
- 9090
- 8090
- 7003
- The Linux distribution is CentOS, installed with [Node.js](#) of version above v10.12.0 and [Go](#) of version above 1.13.

12.2.2 Download Dashboard

Download the tar package as needed, and it is recommended to select the latest version.

Dashboard package	Nebula Graph version
nebula-dashboard-1.1.0.x86_64.tar.gz	2.5.1~3.0.0

12.2.3 Service

Run `tar -xvf nebula-dashboard-1.1.0.x86_64.tar.gz` to decompress the installation package. There are four services in the `nebula-dashboard/vendors`. The descriptions are as follows.

Name	Description	Port
node-exporter	Collects the source information of machines in the cluster, including the CPU, memory, load, disk, and network.	9100
nebula-stats-exporter	Collects the performance metrics in the cluster, including the IP addresses, versions, and monitoring metrics (such as the number of queries, the latency of queries, the latency of heartbeats, and so on).	9200
prometheus	The time series database that stores monitoring data.	9090
nebula-http-gateway	Provides HTTP ports for cluster services to execute nGQL statements to interact with the Nebula Graph database.	8090

The above four services should be deployed as follows.

12.2.4 Procedure

Deploy `node-exporter`

Note

You need to deploy the `node-exporter` service on each machine in the cluster.

To start the service, run the following statement in `node-exporter`:

```
$ nohup ./node-exporter --web.listen-address=":9100" &
```

After the service is started, you can enter `<IP>:9100` in the browser to check whether the service is started normally.

Deploy nebula-stats-exporter**Note**

You only need to deploy the `nebula-stats-exporter` service on the machine where the `nebula-dashboard` service is installed.

1. Modify the `config.yaml` file in `nebula-stats-exporter` to deploy the HTTP ports of all the services. The example is as follows:

```
clusters:
- name: nebula
  instances:
    - name: metad0
      endpointIP: 192.168.8.157
      endpointPort: 19559
      componentType: metad
    - name: metad1
      endpointIP: 192.168.8.155
      endpointPort: 19559
      componentType: metad
    - name: metad2
      endpointIP: 192.168.8.154
      endpointPort: 19559
      componentType: metad
    - name: graphd0
      endpointIP: 192.168.8.157
      endpointPort: 19669
      componentType: graphd
    - name: graphd1
      endpointIP: 192.168.8.155
      endpointPort: 19669
      componentType: graphd
    - name: graphd2
      endpointIP: 192.168.8.154
      endpointPort: 19669
      componentType: graphd
    - name: storaged0
      endpointIP: 192.168.8.157
      endpointPort: 19779
      componentType: storaged
    - name: storaged1
      endpointIP: 192.168.8.155
      endpointPort: 19779
      componentType: storaged
    - name: storaged2
      endpointIP: 192.168.8.154
      endpointPort: 19779
      componentType: storaged
```

2. Run the following statement to start the service:

```
$ nohup ./nebula-stats-exporter --listen-address=":9200" --bare-metal --bare-metal-config=./config.yaml &
```

After the service is started, you can enter `<IP>:9200` in the browser to check whether the service is started normally.

Deploy prometheus**Note**

You only need to deploy the `prometheus` service on the machine where the `nebula-dashboard` service is installed.

1. Modify the `prometheus.yaml` file in `prometheus` to deploy the IP addresses and ports of the `node-exporter` service and the `nebula-stats-exporter`. The example is as follows:

```
global:
  scrape_interval: 5s
  evaluation_interval: 5s
scrape_configs:
  - job_name: 'nebula-stats-exporter'
    static_configs:
      - targets: [
        '192.168.xx.100:9200', # IP address and port of nebula-stats-exporter.
      ]
  - job_name: 'node-exporter'
    static_configs:
      - targets: [
        '192.168.xx.100:9100', # IP address and port of node-exporter.
        '192.168.xx.101:9100'
      ]
```

- `scrape_interval`: The interval for collecting the monitoring data, which is 1 minute by default.
 - `evaluation_interval`: The interval for running alert rules, which is 1 minute by default.
2. Run the following statement to start the service.

```
$ nohup ./prometheus --config.file=./prometheus.yaml &
```

After the service is started, you can enter `<IP>:9090` in the browser to check whether the service is started normally.

Deploy nebula-http-gateway**Note**

You only need to deploy the `nebula-http-gateway` service on the machine where the `nebula-dashboard` service is installed.

To start the service, run the following statement in `nebula-http-gateway`:

```
$ nohup ./nebula-httpd &
```

After the service is started, you can enter `<IP>:8090` in the browser to check whether the service is started normally.

How to deploy the nebula-dashboard service

1. Modify the `config.json` file in `nebula-dashboard/` to deploy the IP address and port of the Graph Service and Proxy. The example is as follows:

```
port: 7003
proxy:
  gateway:
    target: "127.0.0.1:8090" // The IP address and port of the gateway service.
  prometheus:
    target: "127.0.0.1:9090" // The IP address and port of the prometheus service.
nebulaServer:
  ip: "192.168.8.143" // The IP of the machine where your Nebula Graph is deployed.
  port: 9669 // The port of the Nebula Graph.
...
```

2. To start the service, run the following statement in `nebula-dashboard`:

```
$ nohup ./dashboard &
```

After the service is started, you can enter `<IP>:7003` in the browser to check whether the service is started normally.

12.2.5 Stop Dashboard

You can enter `kill <pid>` to stop Dashboard. The examples are as follows:

```
$ kill $(lsof -t -i :9100) # stop the node-exporter service
$ kill $(lsof -t -i :9200) # stop the nebula-stats-exporter service
$ kill $(lsof -t -i :9090) # stop the prometheus service
$ kill $(lsof -t -i :8090) # stop the nebula-http-gateway service
$ kill $(lsof -t -i :7003) # stop dashboard service
```

Last update: February 11, 2022

12.3 Connect Dashboard

After Dashboard is deployed, you can log in and use Dashboard on the browser.

12.3.1 Prerequisites

- The Dashboard services are started. For more information, see [Deploy Dashboard](#).
- We recommend you to use the Chrome browser of the version above 58. Otherwise, there may be compatibility issues.

12.3.2 Procedures

1. Confirm the IP address of the machine where the `nebula-dashboard` service is installed. Enter `<IP>:7003` in the browser to open the login page.
2. Enter the username and the passwords of the Nebula Graph database and click the login button.

Note

Ensure that you have configured the IP of the machines where your Nebula Graph is deployed in the `config.json` file. For more information, see [Deploy Dashboard](#).

- If authentication is enabled, you can log in with the created accounts.
- If authentication is not enabled, you can only log in using `root` as the username and random characters as the password.

To enable authentication, see [Authentication](#).



Nebula Dashboard

Account Login

root

.....


Login

Last update: February 11, 2022

12.4 Dashboard

Nebula Dashboard consists of three parts: Machine, Service, and Management. This topic will describe them in detail.

12.4.1 Overview

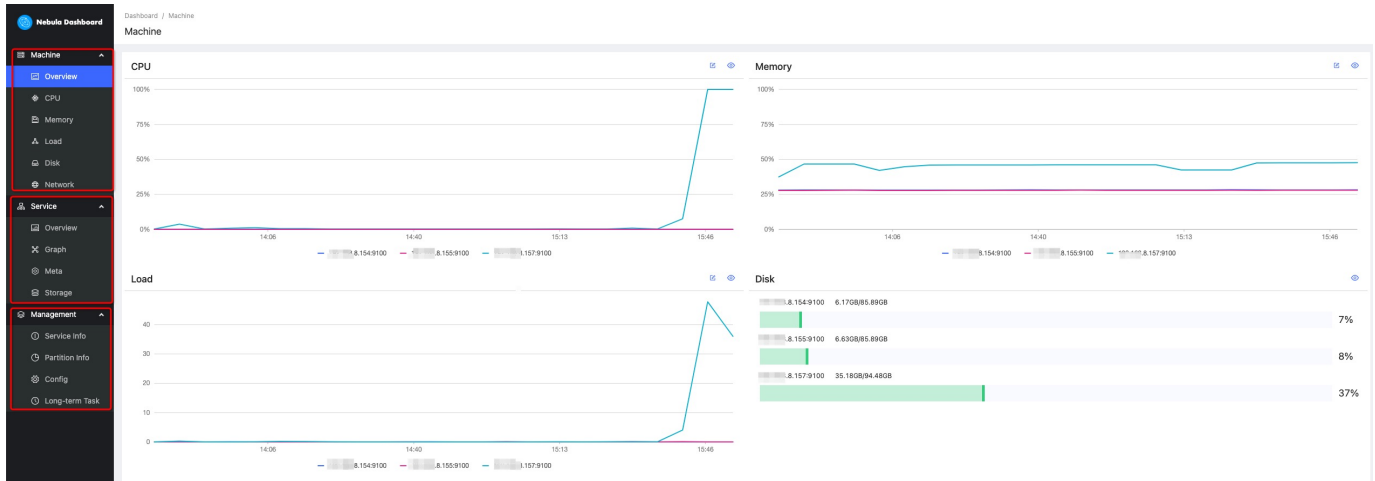

12.4.2 Machine

Machine consists of the following parts:

- Overview

You can check the fluctuations of CPU, Memory, Load, Disk, Network In, and Network Out in the past 24 hours.

For details of certain monitoring metrics, you can click the  symbol in the upper right corner, or click the monitoring metrics on the left.

- CPU, Memory, Load, Disk, Network

It shows the detailed monitoring data of the machine from the above dimensions.

- By default, you can check the monitoring data up to 14 days before. The alternative can be 1 hour, 6 hours, 12 hours, 1 day, 3 days, 7 days, or 14 days in the past.
- You can choose the machine and monitoring metrics that you want to check. For more information, see [monitor parameter](#).
- The Graph service supports a set of graph space metrics. For details, see [Graph space](#).
- You can set a base line as a reference.



12.4.3 Service

Service consists of the following parts:

- Overview

You can check the fluctuations of monitoring metrics of various services in the past 24 hours. You can also switch to the **Version** page to view the IP addresses and versions of all services.

For details of certain monitoring metrics, you can click the  symbol in the upper right corner, or click the services on the left.


Note

The overview page of the current Community Edition only supports setting two monitoring metrics for each service. You can adjust it by clicking the **Set up** button.

- Graph, Meta, Storage

It shows the detailed monitoring data of the above services.

- By default, you can check the monitoring data up to 14 days before. The alternative can be 1 hour, 6 hours, 12 hours, 1 day, 3 days, 7 days, or 14 days in the past.
- You can choose the machine that you want to check the monitoring data, monitoring metrics, metric methods, and period. For more information, see [monitor parameter](#).
- You can set a base line as a reference.
- You can check the status of the current service.

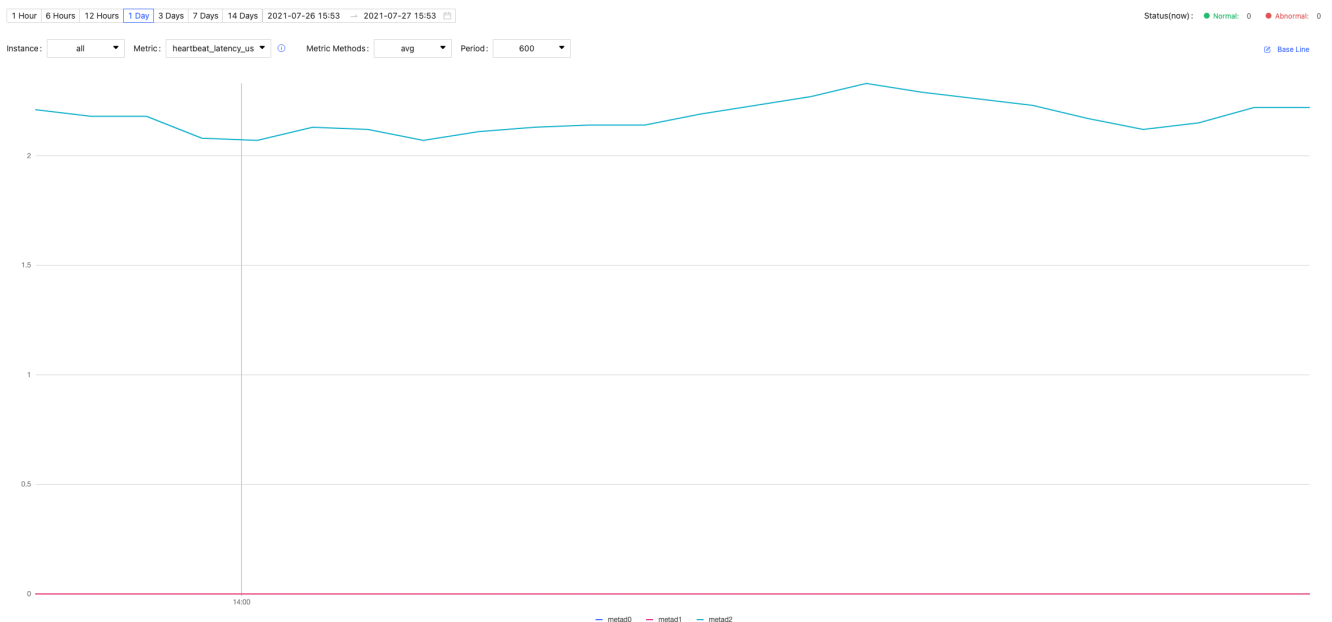

12.4.4 Management

Note

Non-root users can view the service information and the partition information with spatial permissions, but cannot view the configuration and long-term tasks.

Management consists of the following parts:

- Service Info

It shows the basic information of the Storage Service, including the information of the host, the commit ID of versions, the number of leaders, the distribution of partitions, and the distribution of leaders.

- Partition Info

You can check the information of partitions in different graph spaces. The descriptions are as follows.

Parameter	Description
Partition ID	The ID of the partition.
Leader	The IP address and the port of the leader.
Peers	The IP addresses and the ports of all the replicas.
Losts	The IP addresses and the ports of replicas at fault.

- Config

It shows the configuration of each service. Dashboard does not support online modification of configurations for now. For details, see [configurations](#).

- Long-term Task

It shows the information of all jobs. Dashboard does not support online management of jobs for now. For details, see [job statements](#).

12.4.5 Others

In the lower left corner of the page, you can:

- Sign out
- Switch between Chinese and English
- View the current Dashboard release
- View the user manual and forum
- Fold the sidebar

Last update: January 17, 2022

12.5 Metrics

This topic will describe the monitoring metrics in Nebula Dashboard.

12.5.1 Machine

Note

- All the machine metrics listed below are for the Linux operating system.
- The default unit in **Disk** and **Network** is byte. The unit will change with the data magnitude as the page displays. For example, when the flow is less than 1 KB/s, the unit will be Bytes/s.
- For versions of Dashboard Community Edition greater than v1.0.2, the memory occupied by Buff and Cache will not be counted in the memory usage.

CPU

Parameter	Description
<code>cpu_utilization</code>	The percentage of used CPU.
<code>cpu_idle</code>	The percentage of idled CPU.
<code>cpu_wait</code>	The percentage of CPU waiting for IO operations.
<code>cpu_user</code>	The percentage of CPU used by users.
<code>cpu_system</code>	The percentage of CPU used by the system.

Memory

Parameter	Description
<code>memory_utilization</code>	The percentage of used memory.
<code>memory_used</code>	The memory space used (including caches).
<code>memory_actual_used</code>	The memory space used (not including caches).
<code>memory_free</code>	The memory space available.

Load

Parameter	Description
<code>load_1m</code>	The average load of the system in the last 1 minute.
<code>load_5m</code>	The average load of the system in the last 5 minutes.
<code>load_15m</code>	The average load of the system in the last 15 minutes.

Disk

Parameter	Description
<code>disk_used</code>	The disk space used.
<code>disk_free</code>	The disk space available.
<code>disk_readbytes</code>	The number of bytes that the system reads in the disk per second.
<code>disk_writebytes</code>	The number of bytes that the system writes in the disk per second.
<code>disk_readiops</code>	The number of read queries that the disk receives per second.
<code>disk_writeiops</code>	The number of write queries that the disk receives per second.
<code>inode_utilization</code>	The percentage of used inode.

Network

Parameter	Description
<code>network_in_rate</code>	The number of bytes that the network card receives per second.
<code>network_out_rate</code>	The number of bytes that the network card sends out per second.
<code>network_in_errs</code>	The number of wrong bytes that the network card receives per second.
<code>network_out_errs</code>	The number of wrong bytes that the network card sends out per second.
<code>network_in_packets</code>	The number of data packages that the network card receives per second.
<code>network_out_packets</code>	The number of data packages that the network card sends out per second.

12.5.2 Service

Period

The period is the time range of counting metrics. It currently supports 5 seconds, 60 seconds, 600 seconds, and 3600 seconds, which respectively represent the last 5 seconds, the last 1 minute, the last 10 minutes, and the last 1 hour.

Metric methods

Parameter	Description
<code>rate</code>	The average rate of operations per second in a period.
<code>sum</code>	The sum of operations in the period.
<code>avg</code>	The average latency in the cycle.
<code>P75</code>	The 75th percentile latency.
<code>P95</code>	The 95th percentile latency.
<code>P99</code>	The 99th percentile latency.
<code>P999</code>	The 99.9th percentile latency.

Graph

Parameter	Description
num_active_queries	The number of queries currently being executed.
num_active_sessions	The number of currently active sessions.
num_aggregate_executors	The number of executions for the Aggregation operator.
num_auth_failed_sessions_bad_username_password	The number of sessions where authentication failed due to incorrect username and password.
num_auth_failed_sessions	The number of sessions in which login authentication failed.
num_indexscan_executors	The number of executions for index scan operators.
num_killed_queries	The number of killed queries.
num_opened_sessions	The number of sessions connected to the server.
num_queries	The number of queries.
num_query_errors_leader_changes	The number of the raft leader changes due to query errors.
num_query_errors	The number of query errors.
num_reclaimed_expired_sessions	The number of expired sessions actively reclaimed by the server.
num_rpc_sent_to_metad_failed	The number of failed RPC requests that the Graphd service sends to the Metad service.
num_rpc_sent_to_metad	The number of RPC requests that the Graphd service sent to the Metad service.
num_rpc_sent_to_storaged_failed	The number of failed RPC requests that the Graphd service sent to the Storaged service.
num_rpc_sent_to_storaged	The number of RPC requests that the Graphd service sent to the Storaged service.
num_sentences	The number of statements received by the Graphd service.
num_slow_queries	The number of slow queries.
num_sort_executors	The number of executions for the Sort operator.
optimizer_latency_us	The latency of executing optimizer statements.
query_latency_us	The average latency of queries.
slow_query_latency_us	The average latency of slow queries.

Meta

Parameter	Description
commit_log_latency_us	The latency of committing logs in Raft.
commit_snapshot_latency_us	The latency of committing snapshots in Raft.
heartbeat_latency_us	The latency of heartbeats.
num_heartbeats	The number of heartbeats.
num_raft_votes	The number of votes in Raft.
transfer_leader_latency_us	The latency of transferring the raft leader.

Storage

Parameter	Description
add_edges_latency_us	The average latency of adding edges.
add_vertices_latency_us	The average latency of adding vertices.
commit_log_latency_us	The latency of committing logs in Raft.
commit_snapshot_latency_us	The latency of committing snapshots in Raft.
delete_edges_latency_us	The average latency of deleting edges.
delete_vertices_latency_us	The average latency of deleting vertices.
get_neighbors_latency_us	The average latency of querying neighbor vertices.
num_edges_deleted	The number of deleted edges.
num_edges_inserted	The number of inserted edges.
numRAFT_votes	The number of votes in Raft.
num_rpc_sent_to_metad_failed	The number of failed RPC requests that the Storage service sent to the Meta service.
num_rpc_sent_to_metad	The number of RPC requests that the Storage service sent to the Meta service.
num_tags_deleted	The number of deleted tags.
num_vertices_deleted	The number of deleted vertices.
num_vertices_inserted	The number of inserted vertices.
transfer_leader_latency_us	The latency of transferring the raft leader.

Graph space

Parameter	Description
num_active_queries	The number of queries currently being executed.
num_aggregate_executors	The number of executions for the Aggregation operator.
num_indexscan_executors	The number of executions for index scan operators.
num_killed_queries	The number of killed queries.
num_queries	The number of queries.
num_query_errors_leader_changes	The number of raft leader changes due to query errors.
num_query_errors	The number of query errors.
num_sentences	The number of statements received by the Graphd service.
num_slow_queries	The number of slow queries.
num_sort_executors	The number of executions for the Sort operator.
optimizer_latency_us	The latency of executing optimizer statements.
query_latency_us	The average latency of queries.

.....

Last update: January 17, 2022

13. Nebula Dashboard Enterprise Edition

13.1 What is Nebula Dashboard Enterprise Edition

Nebula Dashboard Enterprise Edition (Dashboard for short) is a visualization tool that monitors and manages the status of machines and services in Nebula Graph clusters. This topic introduces Dashboard Enterprise Edition. For more information, see [What is Nebula Dashboard Community Edition](#).



13.1.1 Features

- Create a Nebula Graph cluster of a specified version, import nodes in batches, scale out Nebula Graph services with one click
- Import clusters, balance data, scale out or in on the visualization interface.
- Manage clusters, and view the operation log of clusters within the last 14 days.
- Start, stop, and restart services on the visualization interface.
- Update the configuration of Storage services and Graph services in clusters quickly.
- Monitor the information of all the services in clusters, including the IP address, version, and monitoring metrics (such as the number of queries, the latency of queries, and the latency of heartbeats).
- Monitor the status of all the machines in clusters, including CPU, memory, load, disk, and network.
- Monitor the information of clusters, including the information of services, partitions, configurations, and long-term tasks.

13.1.2 Scenarios

- You want a visualized operation and maintenance monitoring platform for large-scale clusters.
- You want to monitor key metrics conveniently and quickly, and present multiple key information of the business to ensure that the business can be operated normally.
- You want to monitor clusters from multiple dimensions (such as the time, aggregate rules, and metrics).
- You want to review the failure after it occurs, confirm when it happened, and view its associated phenomena.

13.1.3 Precautions

- The monitoring data will be updated per 7 seconds by default.
- The monitoring data will be retained for 14 days by default, that is, only the monitoring data within the last 14 days can be queried.
- The version of Nebula Graph must be 2.5.1 or later.
- It is recommend to use the latest version of Chrome to access Dashboard.
- It is recommend to use the official installation package to create or import clusters.

Note

The monitoring feature is supported by Prometheus. The update frequency and retention intervals can be modified. For details, see [Prometheus](#).

13.1.4 Version compatibility

The version correspondence between Nebula Graph and Dashboard Enterprise Edition is as follows.

Nebula Graph version	Dashboard version
2.5.1~3.0.0	1.1.0
2.0.1~2.6.1	1.0.2
2.0.1~2.6.1	1.0.1
2.0.1~2.6.1	1.0.0

Last update: February 10, 2022

13.2 Deploy Dashboard

This topic will introduce how to install and deploy Dashboard in detail.

13.2.1 Prerequisites

Before deploying Dashboard, you must do a check of these:

- Select and download Dashboard of the correct version. For information about the version correspondence between Dashboard and Nebula Graph, see [Version compatibility](#).
- The environment of **MySQL** is ready and a database named as `dashboard` is created.
- Before the installation starts, the following ports are not occupied.

Port	Description
7005	The port through which Dashboard provides the web service.
9090	The port of the prometheus service.
9200	The port of the nebula-stats-exporter service.
9093	The port of the Alertmanager service, used to receive Prometheus alerts and then send them to Dashboard.

- The license is ready.

Enterpriseonly

The license is only available in the Enterprise Edition. To obtain the license, apply for [Nebula Dashboard Free Trial](#).

13.2.2 Install and start

1. Select and download the tar package according to your needs. It is recommended to select the latest version.

Enterpriseonly

For features of Dashboard Enterprise Edition, see [Pricing](#).

2. Use `tar -xvzf` to decompress the tar package.

```
$ tar -xvzf nebula-dashboard-ent-<version>.linux-amd64.tar.gz
```

For example:

```
$ tar -xvzf nebula-dashboard-ent-1.1.0.linux-amd64.tar.gz
```

3. Edit `vim config/config.yaml` to modify the configuration.

```
# Information about the database
database:
  dialect: mysql # The type of database used, which currently only supports MySQL.
  host: 192.168.8.157 # The IP address of the connected MySQL database.
  port: 3306 # The port of the connected MySQL database.
  username: root # The username to log in MySQL.
  password: nebula # The password to log in MySQL.
  name: dashboard # The name of the corresponding database.
  autoMigrate: true # Auto database tables creation, the default value of which is true.
# Information about the exporter port
exporter:
  nodePort: 9100 # The port of the node-exporter service.
  nebulaPort: 9200 # The port of the nebula-stats-exporter service.
# Information of services
proxy:
```

```

prometheus:
  target: "127.0.0.1:9090" # The IP address and port of the prometheus service.
alertmanager:
  target: "127.0.0.1:9093" # The IP address and port of the Alertmanager service.
# Information of the sender's Email used to invite LDAP accounts.
mail:
  host: smtp.office365.com # The SMTP server address.
  port: 587 # The port number of the SMTP server.
  username: "" # The SMTP server account name.
  password: "" # The SMTP server password.
# System information
system:
  webAddress: http://127.0.0.1:7005 # The address to access Dashboard for the invitee who is invited by mail.
  messageStore: 90 # It sets the number of days to keep alert messages, the value of which is 90 by default.
# LDAP
ldap:
  server: ldap://127.0.0.1 # The LDAP server address.
  bindDN: cn=admin,dc=vesoft,dc=com # The LDAP login username.
  bindPassword: "" # The LDAP login password.
  baseDN: dc=vesoft,dc=com # Set the path to query user data.
  userFilter: "&(objectClass=*)" # Set a filter to LDAP search queries.
  emailKey: mail # Set the field name used to restore email in LDAP.

```

4. Copy the license file to the `nebula-dashboard-ent` directory.

```
$ cp -r <license> <dashboard_path>
```

For example:

```
$ cp -r nebula.license /usr/local/nebula-dashboard-ent
```

5. Start Dashboard.

You can use the following command to start the Dashboard with one click.

```

$ cd scripts
$ sudo ./dashboard.service start all

```

Or execute the following commands to start prometheus, webserver, exporter and gateway services to start Dashboard.

```

$ cd scripts
$ sudo ./dashboard.service start prometheus # Start prometheus service
$ sudo ./dashboard.service start webserver # Start webserver service
$ sudo ./dashboard.service start exporter # Start exporter service
$ sudo ./dashboard.service start gateway # Start gateway service

```

Note

If you change the configuration file after starting Dashboard, you can run `dashboard.service restart all` in the `scripts` directory to synchronize the changes to the Dashboard client page.

13.2.3 Manage Dashboard Service

You can use the `dashboard.service` script to start, stop, and check the Dashboard services.

Syntax

```
$ sudo <dashboard_path>/dashboard/scripts/dashboard.service
[-v] [-h]
<start|stop|status> <prometheus|webserver|exporter|gateway|all>
```

Parameter	Description
dashboard_path	Dashboard installation path.
-v	Display detailed debugging information.
-h	Display help information.
start	Start the target services.
stop	Stop the target services.
status	Check the status of the target services.
prometheus	Set the prometheus Service as the target service.
webserver	Set the webserver Service as the target service.
exporter	Set the exporter Service as the target service.
gateway	Set the gateway Service as the target service.
all	Set all the Dashboard services as the target services.

Examples


Dashboard is installed in the current directory, and you can use the following commands to manage services.

```
$ sudo /dashboard/scripts/dashboard.service start all #Start Dashboard.
$ sudo /dashboard/scripts/dashboard.service stop all #Stop Dashboard.
$ sudo /dashboard/scripts/dashboard.service status all #Check Dashboard status.
$ sudo /dashboard/scripts/dashboard.service restart all #Restart Dashboard.
```

13.2.4 Connect to Dashboard

After Dashboard is successfully started, you can enter `http://<ip_address>:7005` in the address bar of a browser.

If the following login interface is shown in the browser, then you have successfully deployed and started Dashboard.

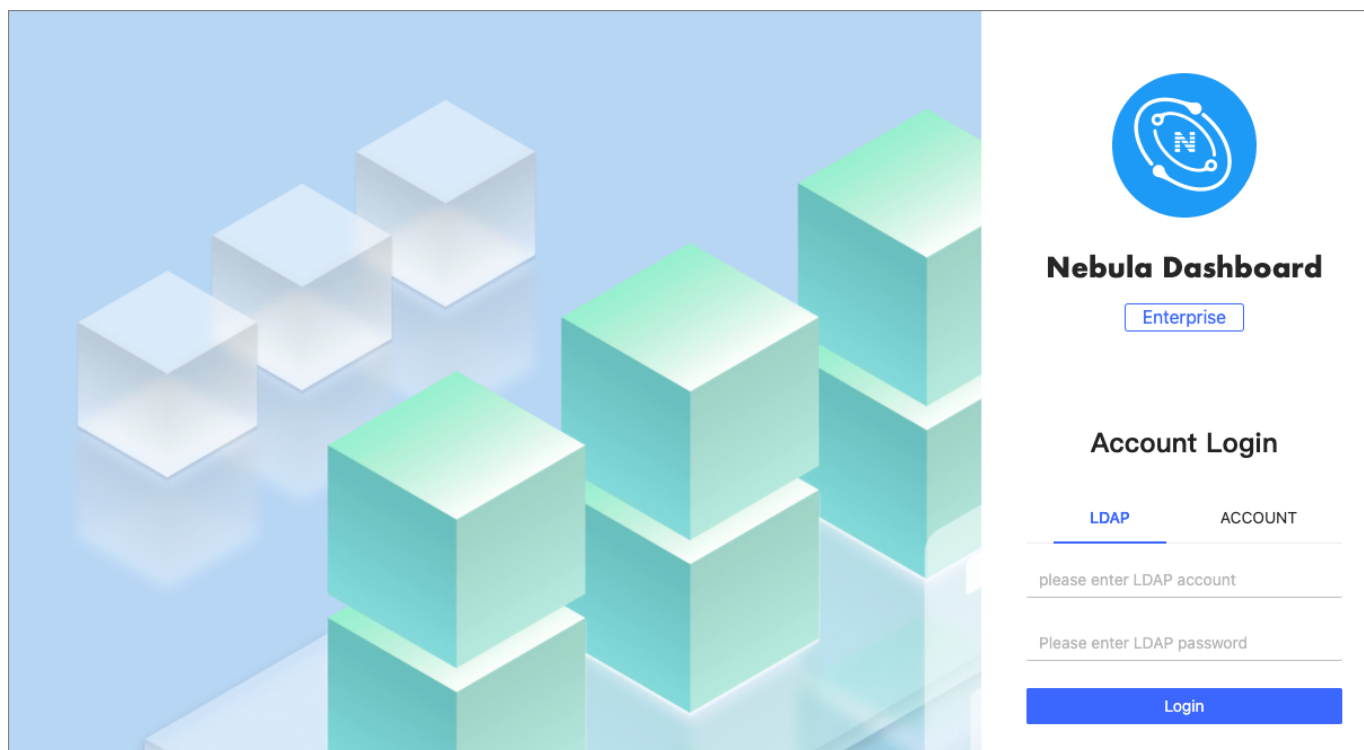

Note

When logging into the Nebula Dashboard Enterprise Edition for the first time, the content of *END USER LICENSE AGREEMENT* is displayed on the login page. Please read it and then click **I agree**.

You can log into Dashboard with the initialization account name `nebula` and password `nebula`, and then create LDAP and general accounts. You can log into Dashboard with the accounts that you have created then. For more information about the Dashboard account, see [Authority Management](#).

Last update: February 16, 2022

13.3 Create and import clusters

13.3.1 Create clusters

This topic introduces how to create clusters using Dashboard.

Steps

You can create a cluster following these steps:

1. In the **Cluster management** page, click **Create cluster**.
2. In the **Create cluster** page, fill in the following:
 - Enter the **Cluster name**, 15 characters at most. In this example, the cluster name is `test_foesa`.
 - Choose the Nebula Graph version to install. In this example, the version is `v2.6.1`.
 - **Add nodes**. The information of each node is required.
 - a. Enter the IP information of each host. In this example, it is `192.168.8.144`.
 - b. Enter the SSH information. In this example, the SSH port is `22`, the SSH user is `vesoft`, and the SSH password is `nebula`.
 - c. Choose the Nebula Graph package. In this example, the package is `nebula-graph-2.6.1.el7.x86_64rpm`.
 - d. Custom the cluster installation path. In this example, the path is `.nebula/cluster`.
 - e. (Optional) Enter the node name to make a note on the node. In this example, the note is `Node_1`.

Add Node

* Host ? :

192.168.8.144

* SSH Port ? :

22

* SSH User ? :

vesoft

* SSH Password :

.....

* Package :

nebula-graph-2.6.1.el7.x86_64.rpm ▾

Installation path ? :

.nebula/cluster

Node Name :

Node_1

Cancel

OK

- **Import nodes in batches**. The information of each node is required. To import nodes in batches, you need to choose the installation package and click **download the CSV template**. Fill in the template and upload it. Ensure that the node is correct, otherwise upload failure may happen.
3. Select the node and add the service you need in the upper right corner. To create a cluster, you need to add 3 types of services to the node. If not familiar with the Nebula Graph architecture, click **Auto add service**.

Please choose the Nebula version to install:

Nebula Graph v2.6.1
 Nebula Graph v2.5.1
 Nebula Graph v2.0.1

Node: 1 added

Add Node
 Batch Import of Node

Auto Add Service
 Add Meta
 Add Graph
 Add Storage

Cluster Name	Host	CPU(Core)	Memory(GB)	Disk(GB)	Package	Service Type	Action
Node_1	192.168.8.144	4	32.78	50.33	nebula-graph-2.6.1.el7.x86_64.rpm	No Service deployed, please add	Edit Delete

Service:

Meta Service

Host	Port	Action
No Data		

Graph Service

Host	Port	Action
No Data		

Storage Service

Host	Port	Action
No Data		

- (Optional) Edit the port of the meta service, the graph service, the storage service, HTTP, and HTTP2, and click **OK** to save.
- Click **Create cluster**. Make sure the configuration is correct and there is no conflict between nodes, click **Confirm**.
- If a cluster with the status of `installing` appears in the list on the cluster management page, you need to wait for 3 to 10 minutes until the status changes to `healthy`, that is, the cluster is created successfully. If the service status is `unhealthy`, it means that there is an abnormal service in the cluster, click **Detail** for more information.

The installation process takes about 3~10 minutes.

Cluster Name	Status	Host	Version	CPU	Memory	Disk	Created Time	Action
test_foosa	installing	192.168.8.144	v2.6.1	1 / 1	1 / 1	1 / 1	2021-11-11 00:02:26	Detail

Next to do

After the cluster is successfully created, you can operate the cluster. For details, see [Overview](#).

Last update: January 26, 2022

13.3.2 Import clusters

This topic introduces how to import clusters using Dashboard. The current version only supports importing clusters deployed by the official DEB or RPM packages and clusters created by Dashboard. Currently, importing clusters deployed by Docker and Kubernetes is not supported.

Steps

Caution

In the same cluster, the service versions need to be unified. Importing Nebula Graph examples from different versions in the same cluster is not supported.

1. In the configuration files of each service, change the IP in `<meta|graph|storage>_server_addrs` and `local_ip` to the server's IP, and then start Nebula Graph.

For details, see [Configurations](#) and [Manage Nebula Graph services](#).

2. In the **Cluster management** page, click **Import cluster**.
3. In the **Import cluster** page, enter the information of **Connect to Nebula Graph**.

- Graphd Host: `n`. In this example, the IP is `192.168.8.157:9669`.
- Username: The account to connect to Nebula Graph. In this example, the username is `vesoft`.
- Password: The password to connect to Nebula Graph. In this example, the password is `nebula`.

Note

By default, authentication is disabled in Nebula Graph. Therefore, you can use `root` as the username and any password to connect to Nebula Graph. When authentication is enabled in Nebula Graph, you need to use the specified username and password to connect to Nebula Graph. For details of authentication, see [Nebula Graph manual](#).

4. In the **Connect to Nebula Graph** page, fill in the following:
 - Enter the cluster name, 15 characters at most. In this example, the cluster name is `create_1027`.
 - **Authorize** the node. The SSH username and password of each node are required.
 - **Batch authorization** requires uploading the CSV file. Edit the authentication information of each node according to the downloaded CSV file. Ensure that the node information is correct, otherwise upload failure may happen.
 - If the node status on the page becomes **authorized**, the node authentication is successful.

Cluster Name:

Node: Added 5 Unauthorized 4 Authorized 1
Batch Authorization

Host	CPU(Core)	Memory(GB)	Disk(GB)	Service Type	Status	Action
192.168.8.154				Storage	Metad	Authorize
192.168.8.155				Storage	Metad	Authorize
192.168.8.157	16	32.79	92.27	Storage	Metad	Authorized
192.168.8.158				Storage		Authorize
127.0.0.1				Graphd		Authorize

5. Ensure that all nodes are authorized successfully. Click **Import cluster**.

Next to do

After the cluster is successfully imported, you can operate the cluster. For details, see [Overview](#).

Last update: January 14, 2022

13.4 Cluster management

13.4.1 Cluster overview

This topic introduces the **Overview** page of Dashboard. You can click **Detail** on the right of the cluster management page to check the overview of a specified cluster.

Overview

The **Overview** page has five parts:

- Cluster survey
- Alert
- Information
- Node
- Status list
- Service

CLUSTER SURVEY

In this part, you can view the number of nodes as well as the number of running and abnormal services of Graphd, Storaged, and Metad. You can click the **View** button to quickly check the abnormal service and node.

ALERT

In the **Alert** section, the system displays the five most recently triggered alert messages according to their severity level (emergency > critical > warning). For more information about alerts, see [Alerts](#).

INFORMATION

In this part, you can view the information of **Cluster name**, **Creation time**, **Creator**, and **Version**.

Note



The version here is the Nebula Graph version installed by the user, not the Dashboard version.



Caution

If the version of Nebula Graph imported by the user is before v2.5.0 or the version is unknown, v2.0.1 will be shown by default.

NODE

- You can view the information of node monitoring quickly and change the displayed information. By default, the CPU information will be shown.

-  You can click  on the page to insert a base line.

-  You can click  to jump to the detailed node monitoring page.

STATUS LIST

This part uses pie charts to visually display the running status of nodes.

SERVICE

- By default, the information of `query_latency_us` and `slow_query_latency_us` will be shown.

-



You can click

Set up to insert a base line.

-



You can click

View to jump to the detailed service monitoring page.

Last update: January 14, 2022


13.4.2 Cluster monitoring


This topic introduces node monitoring, service monitoring, and graph space monitoring of Dashboard.


Node

At the top navigation bar of the Dashboard Enterprise Edition page, click **Cluster Management**, and click **Monitoring->Node** to enter the node monitoring page.

On this page, you can view the variation of CPU, Memory, Load, Disk, and Network In/Out quickly.

-  To set a base line, click the button.

-  To view the detailed monitoring information, click the button. In this example, select **Load** for details. The figure is as follows.

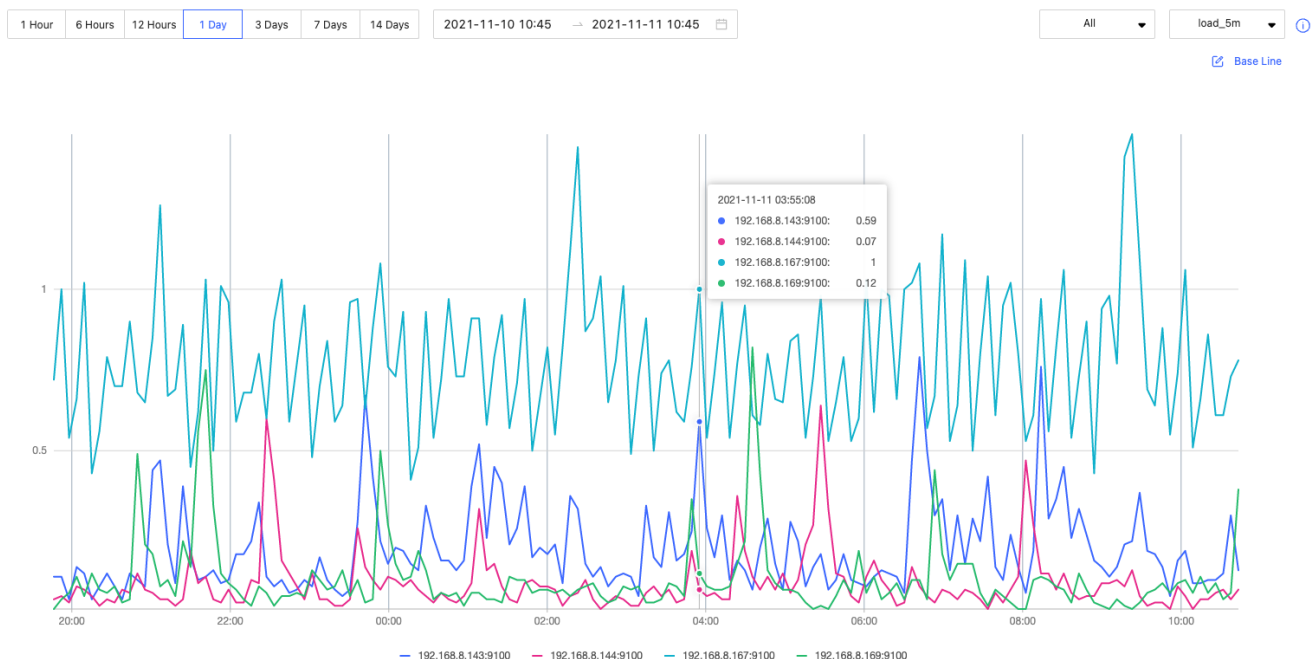

- By default, you can view the monitoring data of the latest 1 hour, 6 hours, 12 hours, 1 day, 3 days, 7 days, or 14 days.
- You can select the machine and monitoring metrics that you want to view. For details of monitoring metrics, see [Monitor parameter](#).
- You can set a base line as a reference standard.



Service


At the top navigation bar of the Dashboard Enterprise Edition page, click **Cluster Management**, and click **Monitoring->Service** to enter the service monitoring page.

On this page, you can view the information of Graph, Meta, and Storage services quickly. In the upper right corner, the number of normal services and abnormal services will be displayed.

Note

In the current **Service** page of the Enterprise Edition, only two monitoring metrics can be set for each service, which can be adjusted by clicking the **Set up** button.

-  To view the detailed monitoring information, click the  button. In this example, select **Graph** for details. The figure is as follows.

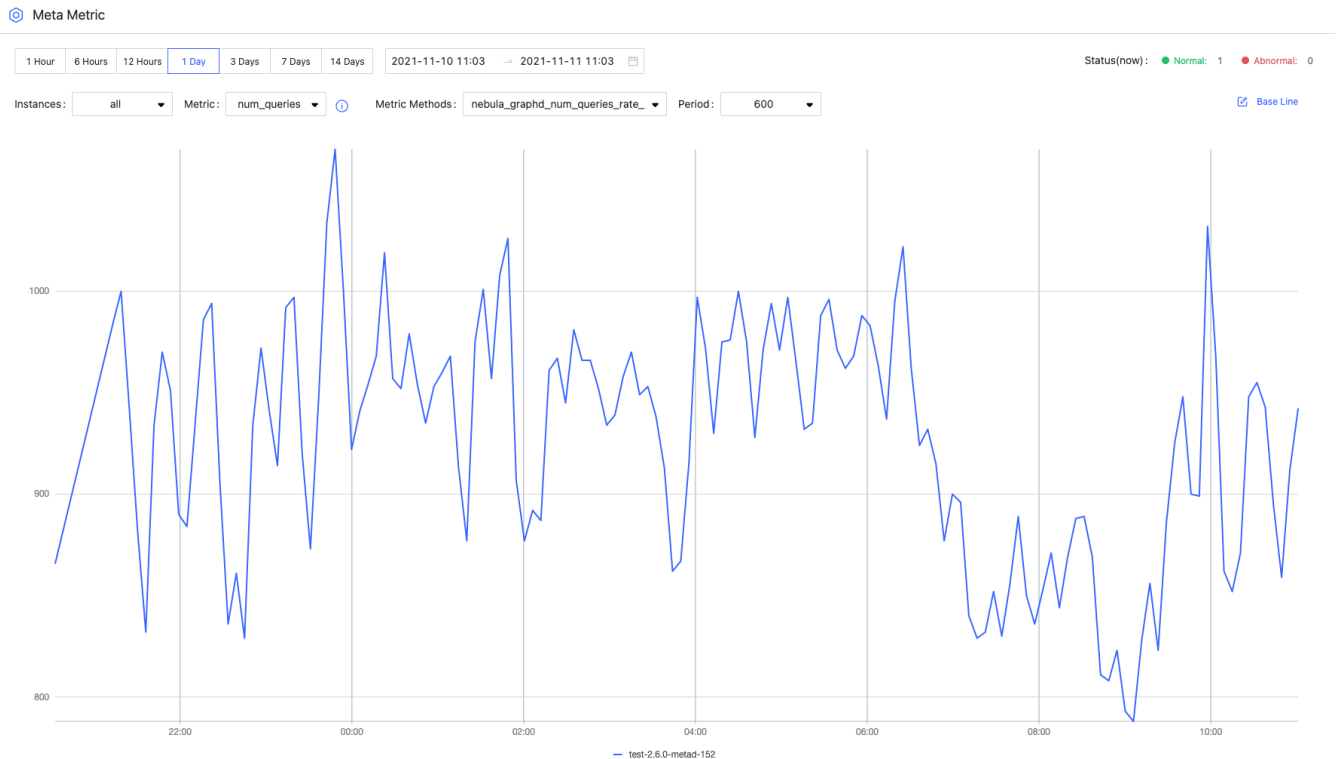

- By default, you can view the monitoring data of the latest 1 hour, 6 hours, 12 hours, 1 day, 3 days, 7days, or 14 days.
- You can select the machine and monitoring metrics that you want to view. For details of monitoring metrics, see [Monitor parameter](#).
- The Graph service supports a set of space-level metrics. For more information, see the following section **Graph space**.
- You can set a base line as a reference standard.
- You can view the status of the current service.

Graph space

Note

Before using graph space metrics, you need to set `enable_space_level_metrics` to `true` in the Graph service. For details, see [Update config](#).

Space graph metrics record the information of different graph spaces separately. Currently, only the Graph service supports a set of space-level metrics.

Only when the behavior of a graph space metric is triggered, you can specify the graph space to view information about the corresponding graph space metric. For information about the space graph metrics, see [Space graph](#).

Last update: January 17, 2022

13.4.3 Alerts

Nebula Graph alerts on monitoring metrics. You can view alert messages, set alert rules, and set alert receivers.

The screenshot displays the Nebula Dashboard Enterprise interface. The left sidebar shows the navigation menu with 'Alert Messages' selected. The main content area is titled 'Alert Messages' and features a table of alert messages. The table has the following columns: Alert Name, Severity, Metric Type, Target, Trigger Time, Status, and Status Setting. A single alert message is listed with the name 'eteadfad', severity 'emergency', and status 'Unresolved'. The interface also includes filters for time range (1 Hour, 6 Hours, 12 Hours, 1 Day, 3 Days, 7 Days, 14 Days), severity, type, and status, along with a search bar and a Reset button.

Alert messages

On the left side navigation bar of the **Cluster Management** page, click **Notification->Alert Messages** to view alert messages.

- You can search for alert messages by message name.
- You can filter alert messages by date and time, and period. Available periods are 1 hour, 6 hours, 12 hours, 1 day, 3 days, 7 days, and 14 days.
- You can filter alert messages by severity, type, and status. Click **Reset** to empty all filtering results.
- You can set the processing status of alert messages. The status is `unsolved` by default, and you can set the status to `Dealing` or `Solved`.

Alert messages cannot be deleted. In the `nebula-dashboard-ent/config/config.yaml` file, `messageStore` sets the number of days to keep alert messages, the value of which is 90 by default. For more information about the configuration file, see [Deploy Dashboard](#).

Alert rules

Before receiving alert messages, you need to set alert rules. Alert rules include custom rules and build-in rules.

CREATE CUSTOM RULES

Follow the below steps to create a custom rule.

1. At the top navigation bar of the Dashboard Enterprise Edition page, click **Cluster Management**, and then on the right side of the target cluster, click **Detail**.
2. On the left side of the **Cluster Management** page, click **Notification->Alert Rules**.
3. On the **Alert Rules** page, click **Custom Rules**, and then click **Create Rule** at the top right of the page.
4. Set alert rules.
 - a. On the **Basic Information** tab, set alert name, severity, and frequency.

Parameter	Description
Alert Name	Set a name for an alert rule. The name can only contain lowercase letters, numbers, and hyphens (-), and must begin and end with a lowercase letter or number. The name contains up to 253 characters.
Severity	Set a severity level for an alert rule. The severity level includes <code>emergency</code> , <code>critical</code> , and <code>warning</code> .
Alert Frequency	Set how often an alert message is sent. Unit: Minute $\frac{1}{60}$ Min $\frac{1}{60}$.

- b. On the **Condition** tab, set metric type, rule, and alert duration.

Parameter	Description
Metric Type	Set a metric type. Metric type includes the node metric type and the service type (graphd $\frac{1}{60}$ storaged $\frac{1}{60}$ metad).
Metric Rule	Set metric rules for a node or a service. For more information, see Monitoring metrics .
Alert duration	Set how long an alert lasts before the alert message is triggered. Unit: Minute (Min).

- c. On the **Message Settings** tab, you can see the rule summary and rule details, and then click **Submit**.

Note

DO NOT modify the rule details unless you are clear of the consequences.

VIEW CUSTOM RULES

On the **Custom Rules**, you can do the following operations.

- Search for alert rules and filter alert rules by severity, type, metric, and status.
- Click **Reset** to empty all filtering results.
- Turn on or off the alert rule you set. The status of an alert rule that has been turned on is **active**. The status of an alert rule that has been turned off is **disable**.

EDIT CUSTOM RULES

In the **Custom Rules** list, select the target rule, and then click the edit icon  to edit the rule.

DELETE CUSTOM RULES

In the **Custom Rules** list, select the target rule, click the delete icon  to delete the rule.

BUILT-IN RULES

The built-in rules are the default rules in Dashboard Enterprise Edition. You can enable or disable the built-in rules. The status of a built-in rule that has been turned on is **active**. The status of a built-in rule that has been turned off is **disable**.

Note

Built-in rules cannot be edited or deleted.

Receiver configuration

Alerts can be configured to send notifications to receivers. You can set the email address of the receiver who receives alert notifications. You can also view your Webhook URL and whether the webhook is enabled or not. For more information about the Webhook, see [Global settings](#).

1. At the top navigation bar of the Dashboard Enterprise Edition page, Click **Cluster Management**, and on the right side of the target cluster, click **Detail**.
2. On the left-side navigation bar of the **Cluster Management** page, click **Notification->Receivers**.
3. On the **Receivers** page,
 - Click **Mail** and input the email of the receiver who receives alert notifications and then click **Add**.
 - Click **Webhook** and see your Webhook URL and whether the webhook is enabled or not.

Last update: February 10, 2022

13.4.4 Cluster information

This topic introduces the cluster information of Dashboard.

At the top navigation bar of the Dashboard Enterprise Edition page, click **Cluster Management**. At the right side of the target cluster, click **Details**, and on the left-side navigation bar of the page, click **Information**, you will see the following six parts:

- Version
- Leader
- Partition
- Service information
- Partition information
- Long-term task

Before viewing the cluster information, you need to select any online Graph service address, enter the account to log in to Nebula Graph (not the Dashboard login account), and the corresponding password.

For multi-machine deployment, you can choose any online Graph service address.

Caution

You need to ensure that Nebula Graph services have been deployed and started. For more information, see [Nebula Graph installation and deployment](#).

Version

On this page, all services and corresponding Nebula versions will be shown.

Leader

On this page, the number of Leaders and the Leader distribution will be shown. You can click the **Balance Leader** button in the upper right corner to distribute Leaders evenly and quickly in the Nebula Graph cluster.

Partition

On this page, you can select the specified graph space and view its distribution of Partitions.

Service information

On this page, the information of Storage services will be shown. The parameter description is as follows:

Parameter	Description
Host	The IP address of the host.
Port	The port of the host.
Status	The host status.
Git Info Sha	The commit ID of the current version.
Leader Count	The number of Leaders.
Partition Distribution	The distribution of partitions.
Leader Distribution	The distribution of Leaders.

Partition information

On this page, the information of partitions will be shown. Before viewing the partition information, you need to select a graph space in the upper left corner. You can also enter the partition ID into the input box in the upper right corner to filter the shown data. The parameter description is as follows:

Parameter	Description
Partition ID	The ID of the partition.
Leader	The IP address and port of the leader.
Peers	The IP addresses and ports of all the replicas.
Lots	The IP addresses and ports of replicas at fault.

Long-term task

On this page, the information of all jobs will be shown. Before viewing the job information, you need to select a graph space in the upper left corner. Online managing jobs is not supported. For more information, see [Job statements](#). The parameter description is as follows:

Parameter	Description
Job ID	Shows the Job ID.
Command	Shows the command type.
Status	Shows the status of the job or task. For more information, see Job statements .
Start Time	Shows a timestamp indicating the time when the job or task starts RUNNING.
Stop Time	Shows a timestamp indicating the time when the job or task gets FINISHED , FAILED , or STOPPED .

Last update: January 20, 2022



13.4.5 Cluster operation

This topic introduces the cluster operation of Dashboard, including cluster node, cluster service, cluster scaling, service configuration, and member management.

Node

On this page, the information of all nodes will be shown, including the cluster name, Host(SSH_User), CPU (Core), etc.



- To add a node quickly, click **Add node** and enter the following information, the Host, SSH port, SSH user, SSH password, and select a Nebula Graph package.

-  Click the  button to view the process name, service type, status, runtime directory of the corresponding node.

- Click **Node monitoring** to jump to the detailed node monitoring page. For more information, see [Cluster monitoring](#).
- Click **Edit node** to modify the SSH port, SSH user, and SSH password.
- If a node has no service, you can **delete the node**.

Service

- On this page, you can select the service type, service status, and Host to filter the shown data, quickly select one or multiple services, and start/stop/restart the service with one click.

-  Click the  icon to quickly view the [Service monitoring](#).

Danger

If you click **Stop/Restart**, the running task will be stopped instantly, which may cause data inconsistency. It is recommended to perform this operation during the low peak period of the business.

Update config

On this page, you can modify configuration files of Storage and Graph services. For more information, see [Storage service configuration](#) and [Graph service configuration](#). Updating configuration files is a batch operation, and each Storage/Graph configuration file will be modified.

- After clicking **Save**, the configuration will take effect after the next service restart.
- Click **Save and restart** to directly restart the service to make the configuration take effect immediately.

Danger

If you click **Save and Restart**, the running task will be stopped and the cluster will be restarted instantly, which may cause data inconsistency. It is recommended to perform this operation during the low peak period of the business.

Member management

Accounts with the role `admin` and cluster creators with the role `user` can add members to manage clusters. By default, the role of cluster creators is `owner`, and is displayed on the **Member Management** page. The role of added members is `operator`.

For more information about accounts and roles, see [Authority management](#).


ADD CLUSTER MEMBERS

The accounts of cluster members must be included in Dashboard accounts. For information about how to create an account, see [Authority management](#).

You can follow the below steps to add cluster members.

1. At the top navigation bar of the Dashboard Enterprise Edition page, click **Cluster Management**.
2. On the right side of the target cluster, click **Detail**.
3. On the left-side navigation bar of the page, click **Operation->Member Management**.
4. On the **Member Management** page, click the search box at the top left.
5. In the drop-down list, select the target account that you want to add to be the administrator of the cluster, and then click **Add**.

OTHER OPERATIONS

- At the top right of the **Member Management** page, you can search for cluster members.
- Click  to delete members.

Last update: January 20, 2022

13.4.6 Operation record

This topic shows how to use the operation record feature in Nebula Dashboard.

At the top navigation bar of the Dashboard Enterprise Edition page, click **Cluster Management**, and on the left-side navigation bar, click **Operation Record** to enter the operation history page.

On the **Operation record** page, you can check the operation records of the latest 1 hour, 6 hours, 1 day, 3 days, 7days, or 14 days. You can also view who runs what operation on which cluster at what time.

Last update: January 14, 2022

13.4.7 Other settings

The following shows other settings in Nebula Dashboard.

At the top navigation bar of the Dashboard Enterprise Edition page, click **Cluster Management**, and on the left-side navigation bar, click **Other Settings** to enter the other settings page.

- **Information:** shows the cluster name, the creation time, and the creator.
- **Unbind:** Unbind a cluster and remove its information from the platform. The unbound cluster info will be removed and no operations will be done on cluster services or Nebula data.

Note

To unbind a cluster, enter the cluster name first.

- **Delete:** Delete a cluster and remove its information from the platform. Deleting the cluster will stop its service and unbind the cluster info, but retain its Nebula data. Be cautious when you delete a cluster.

Note

To delete a cluster, enter the cluster name first

Last update: January 14, 2022

13.5 Authority management

You can log into Nebula Dashboard Enterprise Edition with different types of accounts. Different accounts have different permissions. This article introduces account types, roles, and permissions.

13.5.1 Account types

Once you log into Dashboard Enterprise Edition using the initialized account name `nebula` and password `nebula`, you can create different types of accounts: LDAP accounts and general accounts.

LDAP accounts

Dashboard Enterprise Edition enables you to log into it with your enterprise account by accessing [LDAP](#) (Lightweight Directory Access Protocol).

Before using an LDAP account, LDAP configurations are required.

1. In the Dashboard Enterprise Edition installation path, such as `nebula-graph-dashboard-ent/nebula-dashboard-ent/config`, find the configuration file `config.yaml`.
2. In `config.yaml`, add the following content.

```
ldap:
  server: ldap://127.0.0.1
  bindDN: cn=admin,dc=vesoft,dc=com
  bindPassword: ""
  baseDN: dc=vesoft,dc=com
  userFilter: "&(objectClass=*)"
  emailKey: mail
```

Parameter	Description
server	The LDAP server address.
bindDN	The LDAP login username.
bindPassword	The LDAP login password.
baseDN	Set the path to query user data.
userFilter	Set a filter to LDAP search queries.
emailKey	Set the field name used to restore email in LDAP.

3. Restart Dashboard Enterprise Edition to apply changes.

After the LDAP is configured successfully, and use the initialized account name `nebula` and password `nebula` to log into Dashboard Enterprise Edition, you can create an LDAP account then. For information about how to create an account, see [Create accounts](#).


General accounts

All accounts are general accounts except for LDAP accounts.

13.5.2 Account roles

You can set different roles for your accounts. Roles are different in permissions. There are two types of account roles in Dashboard Enterprise Edition: system roles (`admin` and `user`) and cluster roles (`owner` and `operator`).

The relationship between system roles and cluster roles and their descriptions are as follows.

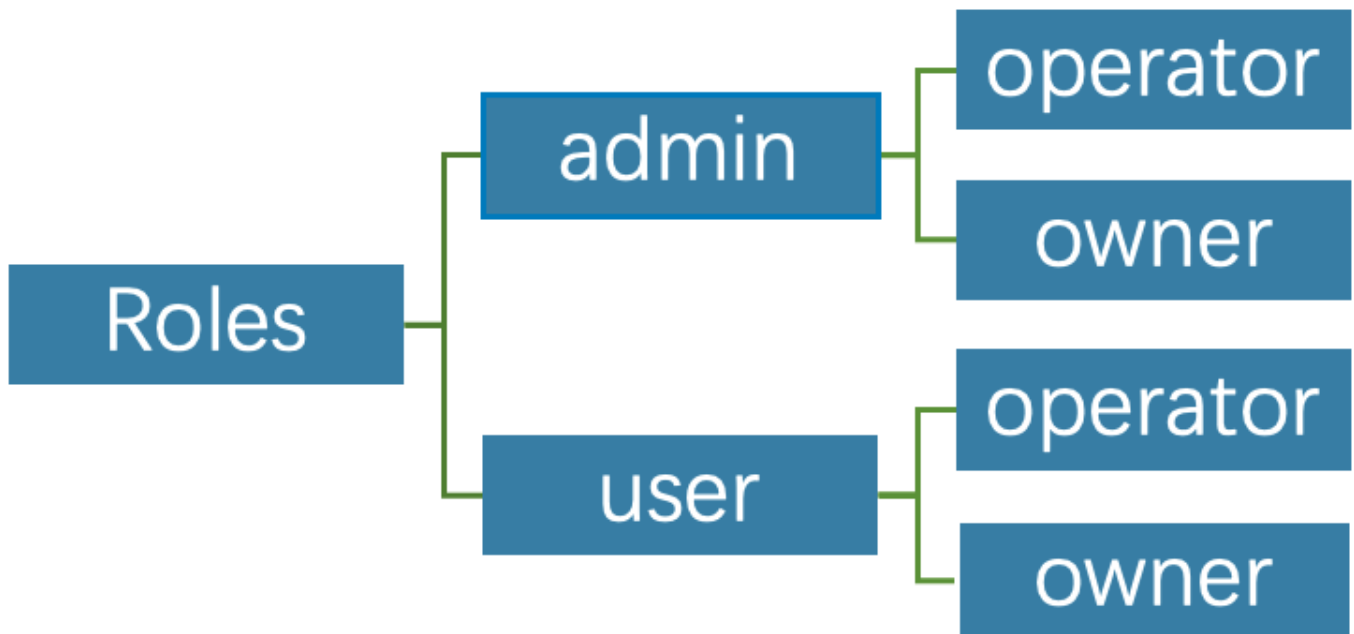**System roles:**

Roles	Permission	Description
admin	<ol style="list-style-type: none"> Create accounts. Modify the role of an existing account. Perform platform settings, system-level alert settings. Delete accounts. 	<ol style="list-style-type: none"> There can be multiple <code>admin</code> roles, i.e. system administrators. An <code>admin</code> is the <code>operator</code> of all clusters by default, i.e. an <code>admin</code> can manage all clusters. Displayed in the cluster member list by default. An <code>owner</code> cannot remove an <code>admin</code> unless the <code>admin</code> is converted to <code>user</code>, and the system will automatically remove the <code>admin</code> from the cluster member list.
user	<ol style="list-style-type: none"> Has read-only permissions for the system dimension. After an <code>admin</code> creates a new account with the <code>user</code> role, the <code>user</code> account cannot view any clusters if the corresponding cluster is not assigned to the account. Can create clusters and become the <code>owner</code> of the clusters. 	<ol style="list-style-type: none"> General role. There can be multiple <code>user</code> roles.

Cluster roles:

Roles	Permission	Description
operator	<ol style="list-style-type: none"> Scale clusters. Set cluster alerts. Manage cluster nodes. Manage cluster services. 	<ol style="list-style-type: none"> The cluster operator. There can be multiple <code>operator</code> roles in a cluster.
owner	<ol style="list-style-type: none"> Have all the permissions of <code>operator</code>. Unbind and delete clusters. Add and remove accounts with <code>operator</code> roles. Transfer the <code>owner</code> role. 	<ol style="list-style-type: none"> The cluster owner. There can only be one <code>owner</code> in a cluster.

13.5.3 Create accounts

Accounts with `admin` roles can create other accounts. The steps are as follows:

1. At the top navigation bar of the Dashboard Enterprise Edition page, click **Authority**, and click **Create**.
2. Select one method and input information to create an account, and click **OK**.
 - **Invite**: Set the invitee's enterprise email and role. After the invitee clicks the **Accept** button in the email to activate the account, the invitee needs to click **Login** to automatically jump to the Dashboard Enterprise Edition login page. The invitee can log into Dashboard with his/her enterprise email account and password.

Note

When selecting the **Invite** method to add accounts, ensure that the invitee's email has been added to the enterprise LDAP server.



- **Create Account**: Set the login name, password, and role for the new account. For information about roles, [Account roles](#).

13.5.4 View accounts

The created accounts are displayed on the **Authority** page.

- You can view the username, account type, role, associated cluster, and create time of accounts.
- **Account Type**: Includes **platform** and **ldap**. **platform** is a general account and **ldap** is an LDAP account.
- **Role**: Displays the role of an account, including **admin** and **user**. For more information about roles, see the above content.
- **Associated Clusters**: Displays all the clusters that can be operated by an account. If the cluster was created by the account, the associated cluster has the `owner` tag.
- You can search for accounts in the search box, and filter accounts by selecting an associated cluster.

13.5.5 Other operations

- In the **Action** column on the **Authority** page, click  to edit account information.
- In the **Action** column on the **Authority** page, click  to delete an account.

Last update: January 18, 2022

13.6 Global settings

This article describes the global settings of using Dashboard Enterprise Edition, including interface settings, help center, and user information.

13.6.1 Interface settings

At the top navigation bar of the Dashboard Enterprise Edition, click **Interface settings** to set system, notification, and other settings.

System settings

On the left-side navigation bar of the **Interface Settings**, click **System Settings** to modify the page title, logo image, and cover image.

Notification Endpoints

- **Mail** Dashboard Enterprise Edition supports sending and receiving alert messages for all clusters via E-mail.

On the left-side navigation bar of the **Interface Settings** page, click **Notification Endpoints->Mail**:

- You need to set the following parameters to send alert messages.

Parameter	Description
SMTP Server Address	The SMTP server address corresponding to your mailbox.
Port	The port number of the SMTP server corresponding to your mailbox.
Use SSL	Check the box to enable SSL for encrypted data transmission.
SMTP User Name	The SMTP server account name.
SMTP Password	The SMTP server password.
Sender Email	The email address of the one who sent you the email.

- You need to set a receiver to receive alert messages.

Parameter	Description
Receiver	Set the email address to receive alert messages. This email address will receive alert messages for all clusters created on Dashboard.


- **Webhook** Supports configuring Webhook to bring all cluster alert messages into third-party projects.

On the left-side navigation bar of the **Interface Settings** page, click **Notification Endpoints->Webhook** to input the **Webhook URL** used to receive alert messages. You can turn on or off the Webhook feature at the top right of the page.

Other settings

On the left-side navigation bar of the **Interface Settings** page, click **Other Settings** to have the following operations:

- Change the display language. Currently, only Chinese and English are supported.
- Turn on or off help tips. An example of tips is as follows.

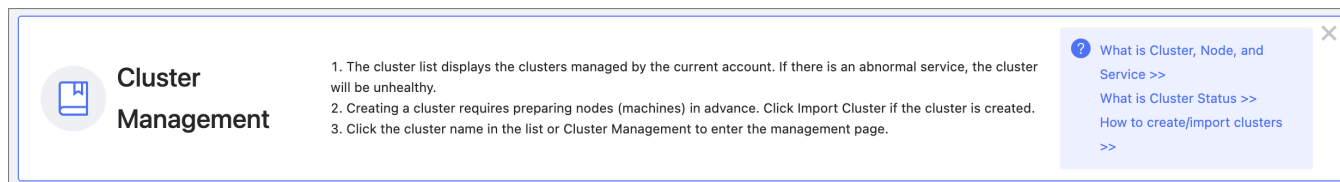

13.6.2 Help center

At the top navigation bar of the Dashboard Enterprise Edition, click **Help**. On the Help page, you can jump to Dashboard Docs, Nebula Graph Docs, Nebula Graph Website, or Nebula Graph Forum.

13.6.3 User information

At the top right of the Dashboard Enterprise Edition page, hover mouse to your account name, such as **nebula**:

- Click **Profile** to view your account information and modify the account login password.

Note

For an LDAP account, the login password cannot be modified. For more information about accounts, see [Authority management](#).

- Click **Logout** to log out of the current account.

Last update: January 14, 2022

13.7 Task Center

It takes a certain amount of time for you to make sure whether a cluster is created or scaled successfully in Nebula Dashboard Enterprise Edition. You can view the progress of such operations in Task Center. It displays the progress of ongoing operations and the history of complete operations.

The operations on clusters are defined as tasks in Task Center. Currently, there are two task types in Task Center, cluster creation and cluster scaling.

At the top navigation bar of the Dashboard Enterprise Edition page, click **Task Center** to view task information.

13.7.1 Running tasks

On the **Task Center** page, click **Running Task** to view the progress of tasks that clusters are being created or scaled.

- Click a task name to view the ID, node name, type, create time, and operator of the running task.
- Click **Task information** to view task details.

13.7.2 Task history

On the **Task Center** page, click **Task History** to view all complete tasks.

- You can filter historical tasks by status, type, date, and time.
- On the right side of the target historical task, click **Task information** to view task details, and click **Logs** to view task execution logs.

13.7.3 Delete tasks

It is currently not possible to cancel running tasks or delete historical tasks.

Last update: January 14, 2022

13.8 Metrics

This topic will describe the monitoring metrics in Nebula Dashboard.

13.8.1 Machine

Note

- All the machine metrics listed below are for the Linux operating system.
- The default unit for **Disk** and **Network** is byte. The unit changes with the data magnitude as the page displays. For example, when the flow is less than 1 KB/s, the unit is Bytes/s.
- For all versions of Dashboard Enterprise Edition, the memory occupied by Buff and Cache will not be counted in the memory usage.

CPU

Parameter	Description
<code>cpu_utilization</code>	The percentage of used CPU.
<code>cpu_idle</code>	The percentage of idled CPU.
<code>cpu_wait</code>	The percentage of CPU waiting for IO operations.
<code>cpu_user</code>	The percentage of CPU used by users.
<code>cpu_system</code>	The percentage of CPU used by the system.

Memory

Parameter	Description
<code>memory_utilization</code>	The percentage of used memory.
<code>memory_used</code>	The memory space used (including caches).
<code>memory_actual_used</code>	The memory space used (not including caches).
<code>memory_free</code>	The memory space available.

Load

Parameter	Description
<code>load_1m</code>	The average load of the system in the last 1 minute.
<code>load_5m</code>	The average load of the system in the last 5 minutes.
<code>load_15m</code>	The average load of the system in the last 15 minutes.

Disk

Parameter	Description
<code>disk_used</code>	The disk space used.
<code>disk_free</code>	The disk space available.
<code>disk_readbytes</code>	The number of bytes that the system reads in the disk per second.
<code>disk_writebytes</code>	The number of bytes that the system writes in the disk per second.
<code>disk_readiops</code>	The number of read queries that the disk receives per second.
<code>disk_writeiops</code>	The number of write queries that the disk receives per second.
<code>inode_utilization</code>	The percentage of used inode.

Network

Parameter	Description
<code>network_in_rate</code>	The number of bytes that the network card receives per second.
<code>network_out_rate</code>	The number of bytes that the network card sends out per second.
<code>network_in_errs</code>	The number of wrong bytes that the network card receives per second.
<code>network_out_errs</code>	The number of wrong bytes that the network card sends out per second.
<code>network_in_packets</code>	The number of data packages that the network card receives per second.
<code>network_out_packets</code>	The number of data packages that the network card sends out per second.

13.8.2 Service**Period**

The period is the time range of counting metrics. It currently supports 5 seconds, 60 seconds, 600 seconds, and 3600 seconds, which respectively represent the last 5 seconds, the last 1 minute, the last 10 minutes, and the last 1 hour.

Metric methods

Parameter	Description
<code>rate</code>	The average rate of operations per second in a period.
<code>sum</code>	The sum of operations in the period.
<code>avg</code>	The average latency in the cycle.
<code>P75</code>	The 75th percentile latency.
<code>P95</code>	The 95th percentile latency.
<code>P99</code>	The 99th percentile latency.
<code>P999</code>	The 99.9th percentile latency.

Graph

Parameter	Description
num_active_queries	The number of queries currently being executed.
num_active_sessions	The number of currently active sessions.
num_aggregate_executors	The number of executions for the Aggregation operator.
num_auth_failed_sessions_bad_username_password	The number of sessions where authentication failed due to incorrect username and password.
num_auth_failed_sessions	The number of sessions in which login authentication failed.
num_indexscan_executors	The number of executions for index scan operators.
num_killed_queries	The number of killed queries.
num_opened_sessions	The number of sessions connected to the server.
num_queries	The number of queries.
num_query_errors_leader_changes	The number of raft leader changes due to query errors.
num_query_errors	The number of query errors.
num_reclaimed_expired_sessions	The number of expired sessions actively reclaimed by the server.
num_rpc_sent_to_metad_failed	The number of failed RPC requests that the Graphd service sends to the Metad service.
num_rpc_sent_to_metad	The number of RPC requests that the Graphd service sent to the Metad service.
num_rpc_sent_to_storaged_failed	The number of failed RPC requests that the Graphd service sent to the Storaged service.
num_rpc_sent_to_storaged	The number of RPC requests that the Graphd service sent to the Storaged service.
num_sentences	The number of statements received by the Graphd service.
num_slow_queries	The number of slow queries.
num_sort_executors	The number of executions for the Sort operator.
optimizer_latency_us	The latency of executing optimizer statements.
query_latency_us	The average latency of queries.
slow_query_latency_us	The average latency of slow queries.

Meta

Parameter	Description
commit_log_latency_us	The latency of committing logs in Raft.
commit_snapshot_latency_us	The latency of committing snapshots in Raft.
heartbeat_latency_us	The latency of heartbeats.
num_heartbeats	The number of heartbeats.
num_raft_votes	The number of votes in Raft.
transfer_leader_latency_us	The latency of transferring the raft leader.

Storage

Parameter	Description
add_edges_latency_us	The average latency of adding edges.
add_vertices_latency_us	The average latency of adding vertices.
commit_log_latency_us	The latency of committing logs in Raft.
commit_snapshot_latency_us	The latency of committing snapshots in Raft.
delete_edges_latency_us	The average latency of deleting edges.
delete_vertices_latency_us	The average latency of deleting vertices.
get_neighbors_latency_us	The average latency of querying neighbor vertices.
num_edges_deleted	The number of deleted edges.
num_edges_inserted	The number of inserted edges.
num_raft_votes	The number of votes in Raft.
num_rpc_sent_to_metad_failed	The number of failed RPC requests that the Storage service sent to the Metad service.
num_rpc_sent_to_metad	The number of RPC requests that the Storage service sent to the Meta service.
num_tags_deleted	The number of deleted tags.
num_vertices_deleted	The number of deleted vertices.
num_vertices_inserted	The number of inserted vertices.
transfer_leader_latency_us	The latency of transferring the raft leader.

Graph space

Parameter	Description
num_active_queries	The number of queries currently being executed.
num_aggregate_executors	The number of executions for the Aggregation operator.
num_indexscan_executors	The number of executions for index scan operators.
num_killed_queries	The number of killed queries.
num_queries	The number of queries.
num_query_errors_leader_changes	The number of raft leader changes due to query errors.
num_query_errors	The number of query errors.
num_sentences	The number of statements received by the Graphd service.
num_slow_queries	The number of slow queries.
num_sort_executors	The number of executions for the Sort operator.
optimizer_latency_us	The latency of executing optimizer statements.
query_latency_us	The average latency of queries.

Last update: January 17, 2022

13.9 FAQ

This topic lists the frequently asked questions for using Nebula Dashboard. You can use the search box in the help center or the search function of the browser to match the questions you are looking for.

13.9.1 "What are Cluster, Node, and Service?"

- Cluster: refers to a group of systems composed of nodes where multiple Nebula Graph services are located.
- Node: refers to the physical or virtual machine hosting Nebula Graph services.
- Service: refers to Nebula services, including Metad, Stored, and Graphd services.

13.9.2 "What is the cluster status?"

The status of a cluster is as follows:

- installing: The cluster is being created. The process will take about 3 to 10 minutes.
- healthy: All services in the cluster are healthy.
- unhealthy: There is an unhealthy service in the cluster service.

13.9.3 "Why authorizing nodes?"

Managing clusters requires the SSH information of the corresponding node. Therefore, you need to have at least an SSH account and the corresponding password with executable permissions before performing operations on Dashboard.

13.9.4 "What is scaling?"

Nebula Graph is a distributed graph database that supports dynamic scaling services at runtime. Therefore, you can dynamically scale Stored and Graphd services through Dashboard. The Metad service cannot be scaled.

13.9.5 "Why cannot operate on the Metad service?"

The Metad service stores the metadata of the Nebula Graph database. Once the Metad service fails to function, the entire cluster may break down. Besides, the amount of data processed by the Metad service is not much, so it is not recommended to scale the Metad service. And we directly disabled operating on the Metad service in Dashboard to prevent the cluster from being unavailable due to the misoperation of users.

13.9.6 "Why Dashboard Enterprise Edition cannot be started?"

- Make sure that the license file is copied to the Dashboard directory and `sudo ./dashboard.service start all` is executed.
- Make sure that the license is not expired.

You can also execute `cat logs/webserver.log` in the Dashboard directory to view the startup information of each module. If the above conditions are met but Dashboard still cannot be started, go to [Nebula Graph Official Forum](#) for consultation.

13.9.7 "Can I add the Nebula Graph installation package manually?"

You can add the installation package manually in Dashboard. To download the system and RPM/DEB package you need, see [How to download Nebula Graph](#) and add the package to `dashboard/download/nebula-graph`. And you can select the added package for deployment when creating and scaling out a cluster.

Last update: January 20, 2022

14. Nebula Explorer

14.1 What is Nebula Explorer

Nebula Explorer (Explorer in short) is a browser-based visualization tool. It is used with the Nebula Graph core to visualize interaction with graph data. Even if there is no experience in graph database, you can quickly become a graph exploration expert.

Enterpriseonly

Explorer is only available in the enterprise version.

Note

You can also try some functions online in [Explorer](#).

14.1.1 Scenarios

You can use Explorer in one of these scenarios:

- You need to quickly find neighbor relationships from complex relationships, analyze suspicious targets, and display graph data in a visual manner.
- For large-scale data sets, the data needs to be filtered, analyzed, and explored in a visual manner.

14.1.2 Features

Explorer has these features:

- **Easy to use:** Explorer can be deployed in simple steps. And
- **User-friendly:** Explorer uses simple visual interaction, no need to conceive nGQL sentences, easy to realize graph exploration.
- **Flexible:** Explorer supports querying data through VID, Tag, and Subgraph.
- **Exploration operations:** Explorer supports exploration operations on multiple vertices, querying the common neighbors of multiple vertices, and querying the path between the source vertex and the destination vertex.
- **Various display:** Explorer supports modifying the color and icon of the vertex in the canvas to highlight key nodes. Data can also be displayed in different modes.
- **Data storage:** Data on a canvas can be stored and exported.

14.1.3 Authentication

Authentication is not enabled in Nebula Graph by default. Users can log into Studio with the `root` account and any password.

When Nebula Graph enables authentication, users can only sign into Studio with the specified account. For more information, see [Authentication](#).

Last update: February 10, 2022

14.2 Deploy and connect

14.2.1 Deploy Explorer

This topic describes how to deploy Explorer locally by RPM and tar packages.

Nebula Graph version

Note

Explorer is released separately, not synchronized with Nebula Graph. And the version naming of Explorer is different from that of Nebula Graph. The version correspondence between Nebula Graph and Explorer is as follows.

Nebula Graph version	Explorer version
2.5.x ~ 3.0.0	2.2.0
2.6.x	2.1.0
2.5.x	2.0.0

RPM-based deployment

PREREQUISITES

Before you deploy Explorer, you must do a check of these:

- The Nebula Graph services are deployed and started. For more information, see [Nebula Graph Database Manual](#).
- Before the installation starts, the following ports are not occupied.

Port	Description
7002	Web service provided by Explorer

Caution

By default, Explorer uses the port `7002`. You can modify the `httpport` in the `conf/app.conf` file in the installation directory and restart the service.

- The Linux distribution is CentOS.
- GO of version above 1.13 is installed.
- The license is ready.

Enterpriseonly

License is only available in the Enterprise Edition. To obtain the license, apply for [Nebula Explorer Free Trial](#).

INSTALLATION

1. Select and download the RPM package according to your needs. It is recommended to select the latest version. Common links are as follows:

Enterpriseonly

Explorer is only available in the enterprise version. Click [Pricing](#) to see more.

2. Use `sudo rpm -i <rpm>` to install RPM package.

For example, use the following command to install Explorer. The default installation path is `/usr/local/nebula-explorer`.

```
$ sudo rpm -i nebula-explorer-<version>.x86_64.rpm
```

You can also install it to the specified path using the following command:

```
$ sudo rpm -i nebula-explorer-xxx.rpm --prefix=<path>
```

3. Copy the license to the installation path.

```
$ cp -r <license> <explorer_path>
```

For example:

```
$ cp -r nebula.license /usr/local/nebula-explorer
```

4. After adding the license, you need to stop and restart the service using the following command.

```
$ systemctl stop nebula-explorer #Stop the service
$ systemctl start nebula-explorer #Start the service
```

START AND STOP

You can use SystemCTL to start and stop the service.

```
$ systemctl status nebula-explorer #Check the status
$ systemctl stop nebula-explorer #Stop the service
$ systemctl start nebula-explorer #Start the service
```

You can also start or stop the service manually using the following command in the installation directory.

```
$ cd ./scripts/rpm
$ bash ./start.sh #Start the service
$ bash ./stop.sh #Stop the service
```

UNINSTALLATION

You can uninstall Explorer using the following command:

```
$ sudo rpm -e nebula-graph-explorer-<version>.x86_64
```

TAR-based deployment

PREREQUISITES

Before deploying Explorer, you must check the following information:

- The Nebula Graph services are deployed and started. For more information, see [Nebula Graph Database Manual](#).
- Before the installation starts, the following ports are not occupied.

Port	Description
7002	Web service provided by Explorer

Caution

By default, Explorer uses the port `7002`. You can modify the `httpport` in the `conf/app.conf` file in the installation directory and restart the service.

- The Linux distribution is CentOS.
- GO of version above 1.13 is installed.
- The license is ready.

Enterpriseonly

License is only available in the Enterprise Edition. To obtain the license, apply for [Nebula Explorer Free Trial](#).

INSTALLATION

1. Select and download the TAR package according to your needs. It is recommended to select the latest version. Common links are as follows:

Enterpriseonly

Explorer is only available in the Enterprise Edition. Click [Pricing](#) to see more.

2. Use `tar -xvf` to decompress the TAR package.

```
$ tar -xvf nebula-graph-explorer-<version>.tar.gz
```

3. Copy the license to the `nebula-explorer` directory.

```
$ cp -r <license> <explorer_path>
```

For example:

```
$ cp -r nebula.license /usr/local/nebula-explorer
```

4. Enter the `nebula-explorer` folder to start Explorer.

```
$ cd nebula-explorer
$ ./nebula-httpd &
```

STOP SERVICE

You can use `kill pid` to stop the service.

```
$ kill $(lsof -t -i :7002)
```

Next to do

When Explorer is started, use `http://<ip_address>:7002` to get access to Explorer.

The following login page shows that Explorer is successfully connected to Nebula Graph.

**Note**

When logging into Nebula Explorer for the first time, the content of *END USER LICENSE AGREEMENT* is displayed on the login page. Please read it and then click **I agree**.

After entering the Explorer login interface, you need to connect to Nebula Graph. For more information, refer to [Connecting to the Nebula Graph](#).

Last update: February 10, 2022

14.2.2 Connect to Nebula Graph

After successfully launching Explorer, you need to configure to connect to Nebula Graph. This topic describes how Explorer connects to the Nebula Graph database.

Prerequisites

Before connecting to the Nebula Graph database, you need to confirm the following information:

- The Nebula Graph services and Explorer are started. For more information, see [Deploy Explorer](#).
- You have the local IP address and the port used by the Graph service of Nebula Graph. The default port is `9669`.
- You have a Nebula Graph account and its password.

Note

If authentication is enabled in Nebula Graph and different role-based accounts are created, you must use the assigned account to connect to Nebula Graph. If authentication is disabled, you can use the `root` and any password to connect to Nebula Graph. For more information, see [Nebula Graph Database Manual](#).

Procedure

To connect Explorer to Nebula Graph, follow these steps:

1. On the **Config Server** page of Explorer, configure these fields:

- **Host:** Enter the IP address and the port of the Graph service of Nebula Graph. The valid format is `IP:port`. The default port is `9669`.

Note

When Nebula Graph and Explorer are deployed on the same machine, you must enter the IP address of the machine, but not `127.0.0.1` or `localhost`, in the **Host** field.

- **Username** and **Password:** Fill in the log in account according to the authentication settings of Nebula Graph.
- If authentication is not enabled, you can use `root` and any password as the username and its password.
- If authentication is enabled and no account information has been created, you can only log in as GOD role and use `root` and `nebula` as the username and its password.
- If authentication is enabled and different users are created and assigned roles, users in different roles log in with their accounts and passwords.

2. After the configuration, click the **Login** button.

Note

One session continues for up to 30 minutes. If you do not operate Explorer within 30 minutes, the active session will time out and you must connect to Nebula Graph again.

14.2.3 Clear connection

When Explorer is still connected to a Nebula Graph database, in the navigation bar on the left side of the page, select **Settings**



> **Clear Connect.**


After that, if the **configuration database** page is displayed on the browser, it means that Explorer has successfully disconnected from the Nebula Graph.

Last update: February 10, 2022

14.3 Page overview


This topic introduces the Explorer page to help you learn more about Explorer's functions.

The Explorer page consists of two modules navigation bar and canvas.

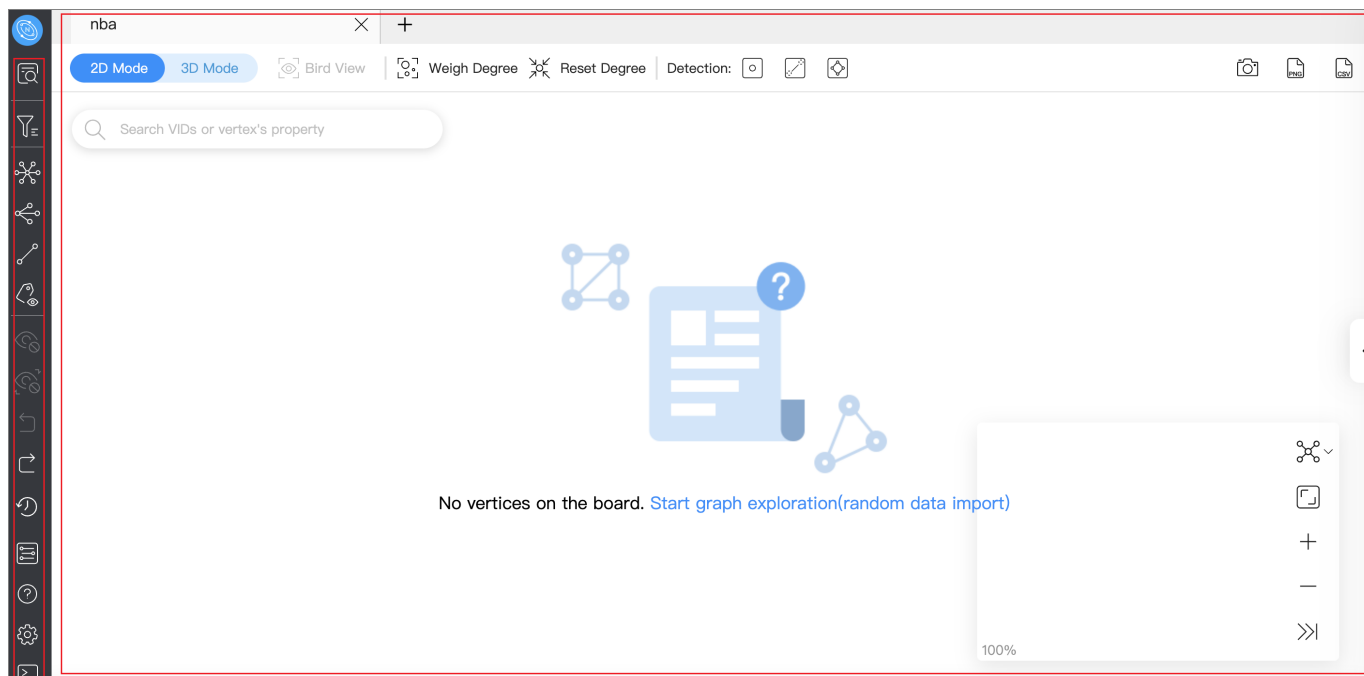





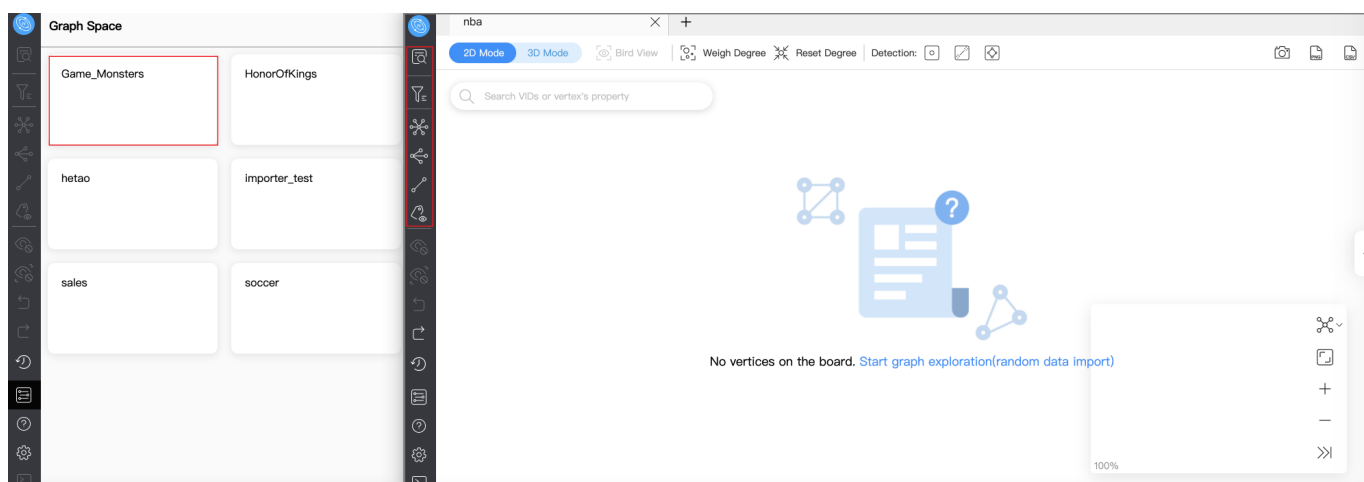










Note

After logging into Explorer, select a graph space and click on it to unlock query and exploration functions in the left-side navigation bar.



14.3.1 Navigation bar

Click the icons in the left-side navigation bar to import, analyze, and explore graph data. The descriptions of the icons are as follows:

Icon	Description
	Enter VIDs or tags to query data. For more information, see Ways to query data .
	Search for target vertexes displayed on the canvas. For more information, see Filter vertexes .
	Perform explorations on the vertices on the canvas by setting edge directions, steps, and filtering conditions.
	Select at least two vertices on the canvas to search for their common neighbors.
	Find all paths, the shortest path, and the non-loop paths from the source to the destination vertex.
	Choose whether to display the properties of vertices or edges on the canvas.
	Hide the selected vertices and edges on the canvas.
	Hide the unselected vertices and edges on the canvas.
	Undo the action in the previous step.
	Restores the action that was previously undone.
	View historical snapshots. For more information, see Canvas snapshots .
	View all graph spaces. Click a graph space to create a canvas corresponding to it.
	View Explorer documents and Nebula Graph forum.
	View your account and shortcuts, edit languages, limit returned results, and clear connection.
	Query data by entering nGQL statements. Querying results are imported on canvas. For more information, see Explorer console .

14.3.2 Canvas

Graph data can be displayed visually on a canvas. The canvas consists of the following parts:

- Tabs on the Top
- Visualization modes
- Data storage
- Search box
- Layouts
- Minimap
- Data overview

For more information, see [Canvas overview](#).

Last update: February 10, 2022


14.4 Start querying

Note

Select and click a target graph space before querying data.

Legacy version compatibility

For versions of Nebula Graph below 3.0.0, you need to create an index before querying data. For more information, see [Create an index](#).

Click the **Start**  icon to query target data. The queried data will be displayed on the canvas. You have the following ways to query data:

- Query by VID
- Query by Tag
- Query Subgraph

14.4.1 Query by VID


You can enter VIDs to query the target vertices and then start data exploration and analysis based on the vertices.

There are three ways to generate VIDs: Manual input, Random import, and File import.

Note

- The VIDs entered or imported must exist in the graph space you have selected.
- Only one VID per row is supported in the querying area.

The following GIF shows how to query data using the `nba` graph space and related data.

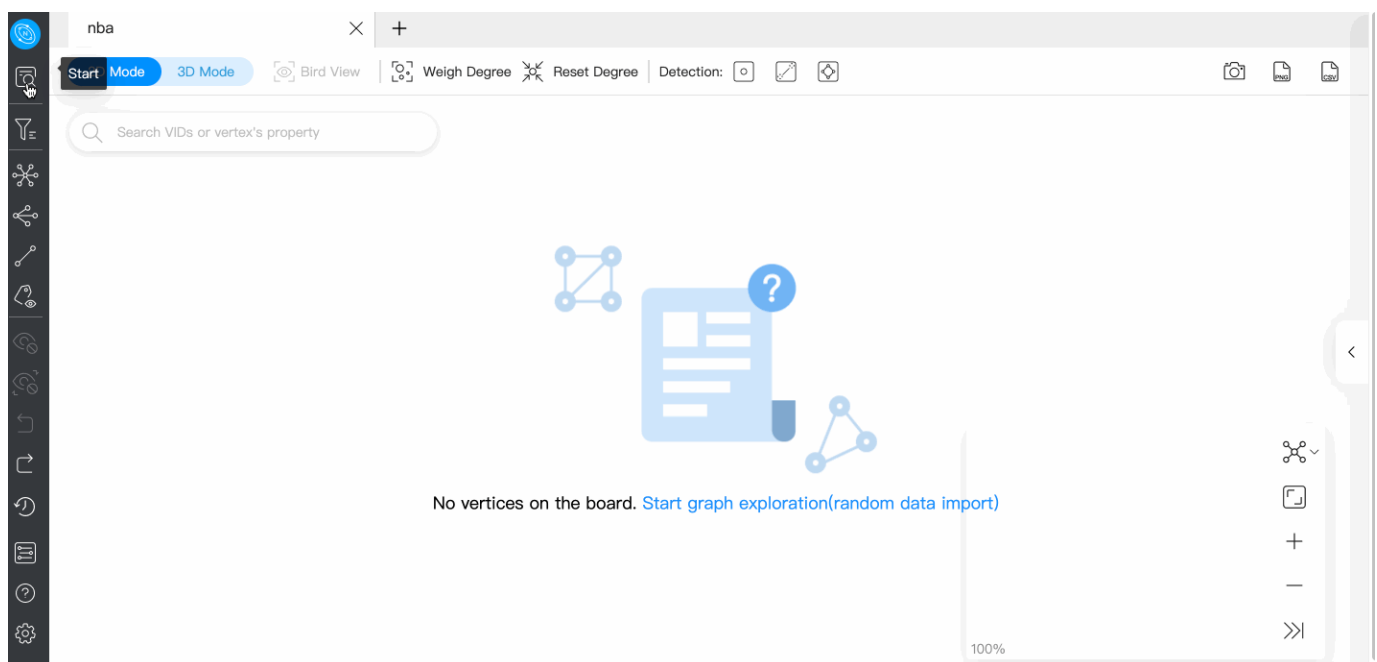

14.4.2 Query by Tag

Note

Make sure that the corresponding tags and indexes exist in the graph space when querying by tag. For more information, [Create tags](#) and [Create indexes](#).

You can limit the number of results and filter the results.

The following example queries 10 players whose age is greater than 30 years old and not equal to 40 years old.

The screenshot shows a 'Query by Tag' dialog box with the following configuration:

- Tag:** player
- Query Limit:** 10
- Select a Index:** player_age_index (age)
- Filter:**
 - Field: age, Operator: >, Value: 30
 - AND
 - Field: age, Operator: !=, Value: 40

14.4.3 Query Subgraph

When querying subgraphs, you must enter one or more VIDs. You can specify the number of steps, edge types, and the direction of inflow and outflow of the subgraph.

The following is an example of VIDs `Kings` and `Suns`, step number `2`, and incoming edge types with a VID value of `101`, the number of steps of `4`, and edge types of `server` and `like`.

Note

When multiple VIDs are entered, the VIDs are separated by the Enter key.

Query Subgraph

VID

Kings xSuns x

Steps

2

Edge Type

serve xlike x

Direction

IN

Last update: February 10, 2022

14.5 Vertex Filter

The Vertex Filter helps you filter the vertices displayed on the canvas by one or more sets of filtering conditions. The filtering conditions include Tag, Property, Operator, and Value.

Note


Each set of filter conditions is only for the data with the target tag. If the conditions are met, the corresponding vertices will be automatically selected. If the conditions are not met, the color of the corresponding vertices will turn gray. The vertices with other tags are not affected.


14.5.1 Prerequisite

Make sure that there are vertices on the canvas. For more information, see [Start query](#).

14.5.2 Example

The following steps are for filtering players older than 33 years old.

1. In the left navigation bar, click **Vertex Filter** .
2. Click **Add New Filter** and then fill in the following values as shown below.
3. (Optional) Repeat the second step to add multiple filtering conditions.
4. Turn on the **Apply Filter** button.

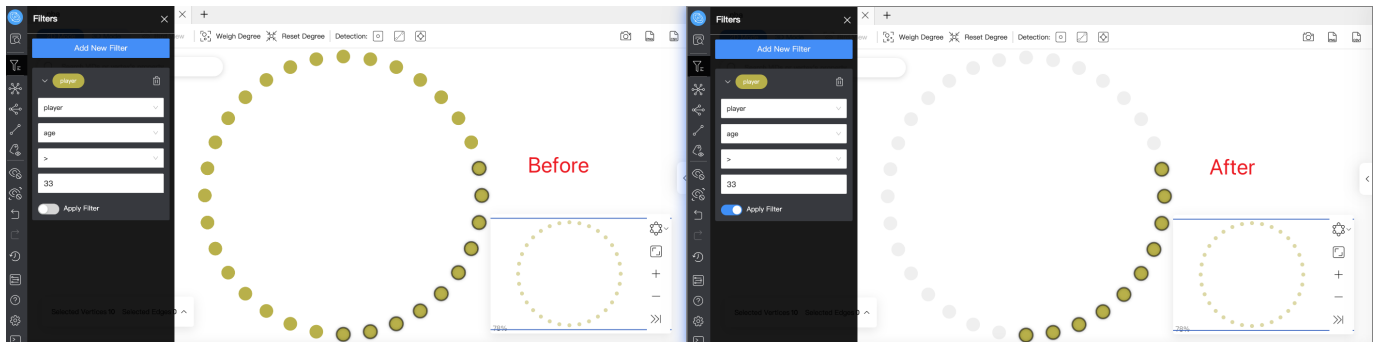


Last update: February 10, 2022

14.6 Graph exploration

The graph exploration can be performed from the following four aspects:


- Expand
- Common Neighbor
- Search for Path
- Inspect Property

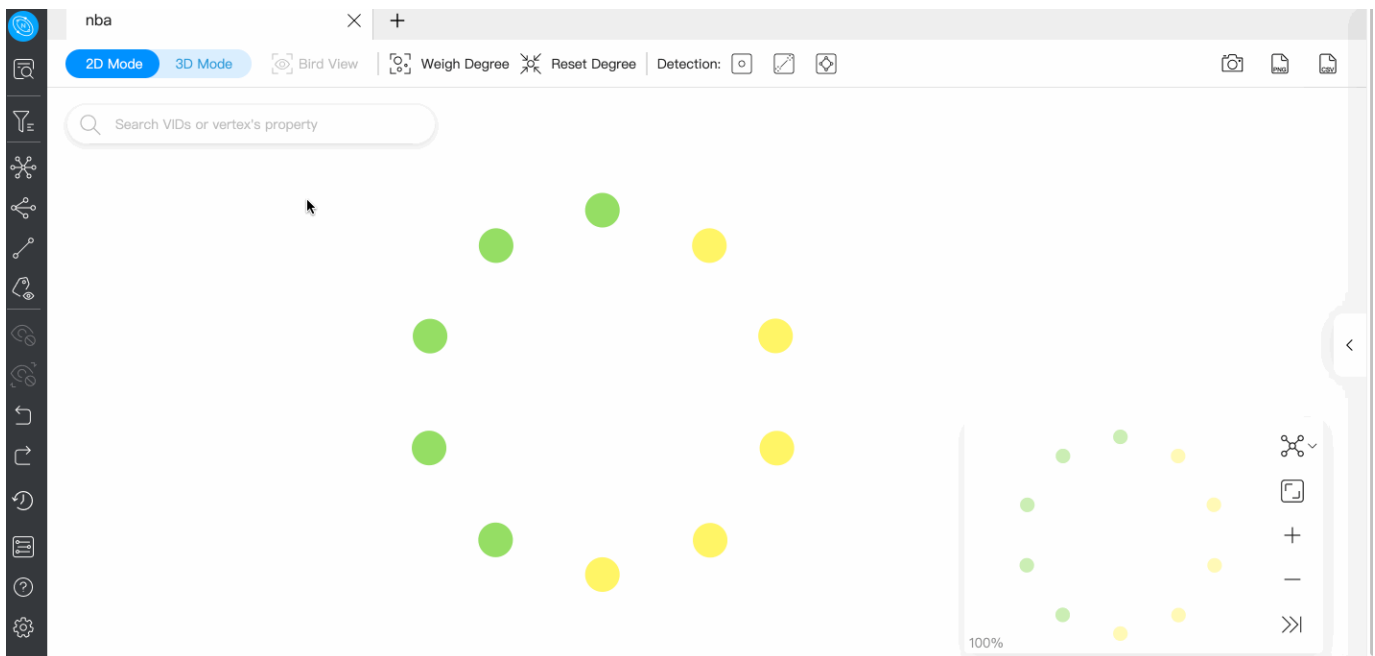

14.6.1 Prerequisite

Make sure that there are vertices on the canvas. For more information, see [Start querying](#).

14.6.2 Expand


In the navigation bar on the left side of the page, click  to open the **Expand** panel. You can double-click on a vertex or right-click to select multiple vertices for expansion. On the panel, you can edit edge types, select the direction of edges, change the color of vertices, custom steps, and add filtering conditions.

Parameter	Description
Edge type	All edges in the graph space are displayed and selected by default.
Direction	Define the edge direction for the selected vertices, including <code>Outgoing</code> , <code>Incoming</code> , and <code>Bidirect</code> .
Vertex Style	<code>Group by vertex tag</code> : The target vertices are displayed in the same color as the corresponding tag. <code>Custom Style</code> : You can customize the color of the target vertices.
Steps	<code>Single</code> : Customize the number of steps from the selected vertex to the target vertex. <code>Range</code> : Customize the step range from the selected vertex to the target vertex.
Filter	Query target vertices by filtering conditions.

Note


The system saves the current configurations on the panel. When you double-click or right-click on a vertex for exploration, the exploration will be performed based on the saved configurations.

14.6.3 Common Neighbor

In the navigation bar on the left side of the page, click  to open the **Common Neighbor** panel. You can select two or more vertices on the canvas and query their common neighbors. When the selected vertices have no common neighbor, the default returns ****There is no data.**


For information about selecting two or more vertices, see [Basic operations](#).

14.6.4 Search for Path

In the navigation bar on the left side of the page, click  to open the **Search Path** panel. **You can select two vertices on the canvas. The first selected vertex is the source and the second is the destination vertex by default.** You can also customize the type and direction of edges, specify the number of exploration steps, and select the query path type.

Parameter	Description
Edge Type	All edges in the graph space are displayed and selected by default.
Direction	Define the edge direction for the selected vertices, including <code>Outgoing</code> , <code>Incoming</code> , and <code>Bidirect</code> .
Query Type	<p><code>All path</code>: Request for vertices and edges in all paths from the source vertex to the destination vertex.</p> <p><code>Shortest Path</code>: Request for vertices and edges in the shortest path from the source vertex to the destination vertex.</p> <p><code>NoLoop Path</code>: Request for vertices and edges in non-loop paths from the source vertex to the destination vertex.</p>
Steps	Customize the number of steps from the source vertex to the destination vertex.
Filter	Query target vertices by filtering conditions.

14.6.5 Inspect Property

In the navigation bar on the left side of the page, click  to open the **Inspect Property** panel. Properties of vertices or edges can be hidden or displayed on the canvas.

Note

- Vertex properties are displayed on the canvas only when the zoom ratio is greater than 90%, and properties are automatically hidden when the zoom ratio is less than 90%.
- Edge properties are displayed on the canvas only when the zoom ratio is greater than 100%, and properties are automatically hidden when the zoom ratio is less than 100%.


Last update: February 10, 2022

14.7 Canvas

14.7.1 Canvas overview


You can visually explore data on a canvas. This topic introduces the composition of a canvas and its related functions.

Canvas overview diagram:

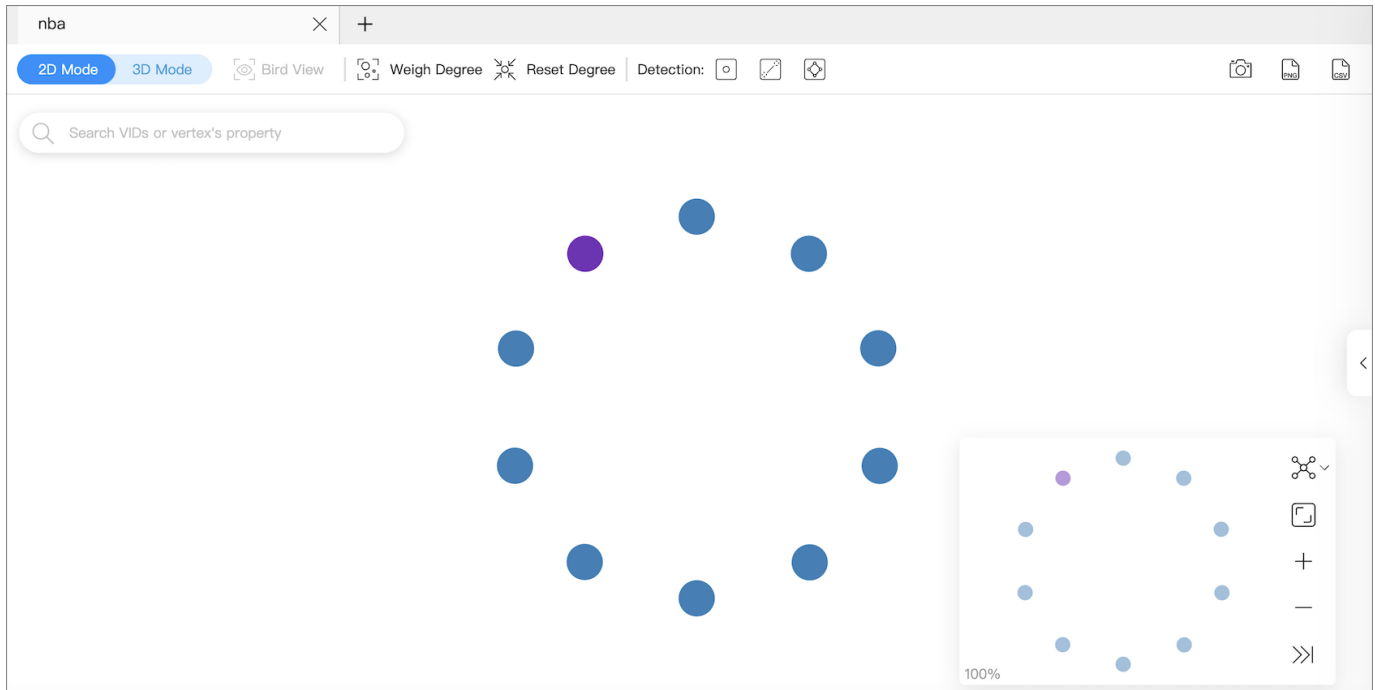

Tabs on the Top

Click the plus sign **+** to add a new canvas. You can have operations on multiple canvases simultaneously.



- Canvas data on different canvases can come from the same graph space or from different graph spaces.
- You can customize the name of a canvas except for the canvas in the left-most tab.




Visualization modes

Graph data can be visually explored in **2D mode** and **3D mode**. For more information, [Visualization modes](#).

Data storage

Graph data on the current canvas can be stored by creating snapshots or exporting canvas data as images or CSV files.

At the top right of the page, you can:


- Click  to create a snapshot. For more information, see [Canvas snapshots](#).
- Click  to store canvas data as images.
- Click  to store canvas data as CSV files.

Search box

In the search box at the top left of the page, enter a VID or the property values of tags to locate target vertices.


Layouts

Explorer provides 6 layouts to show the relationship between the data on a canvas.

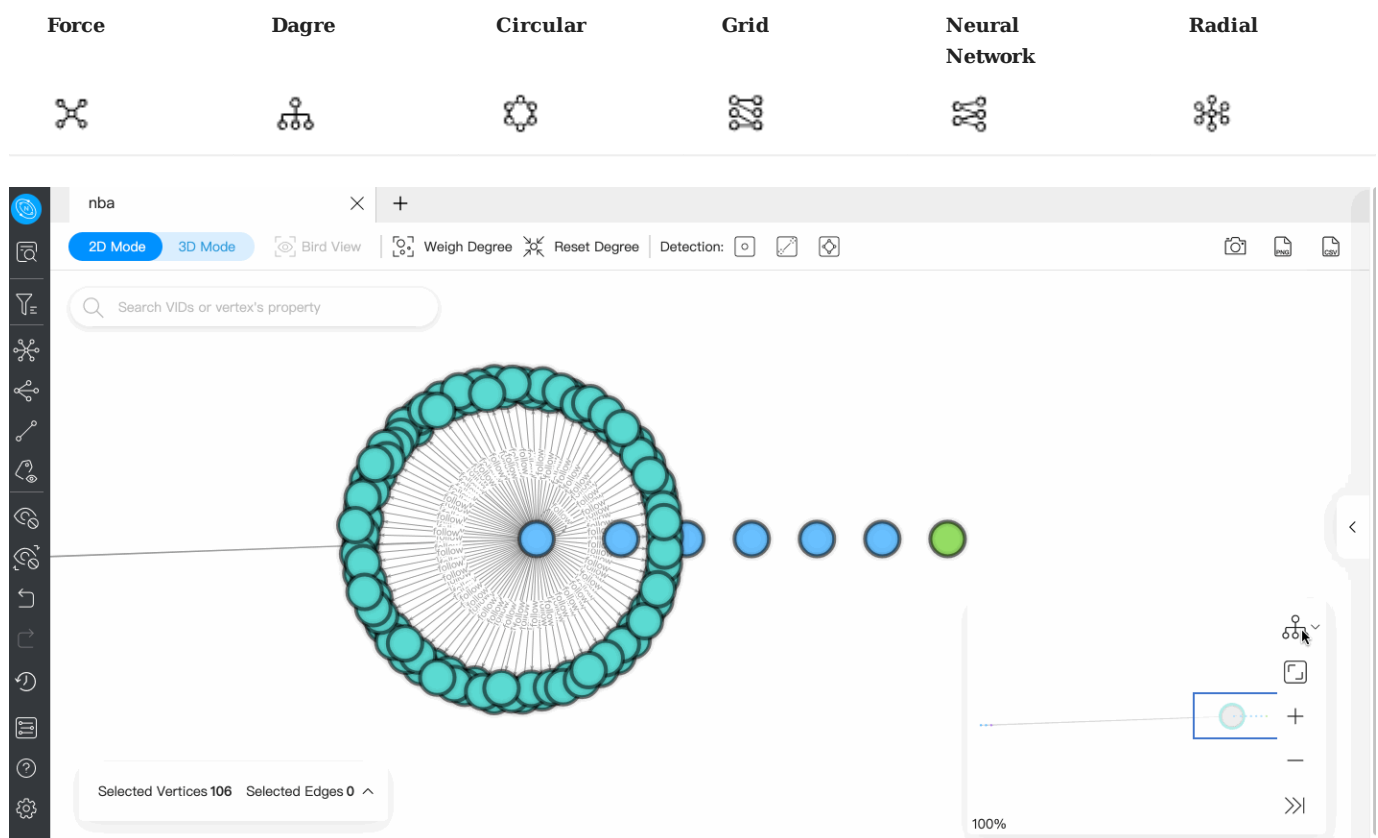


Minimap

You can display the vertices on a canvas on full screen. You can also collapse the minimap, zoom in or zoom out the canvass, etc. The percentage of a canvas graph to the total is displayed in the lower-left corner of the minimap.

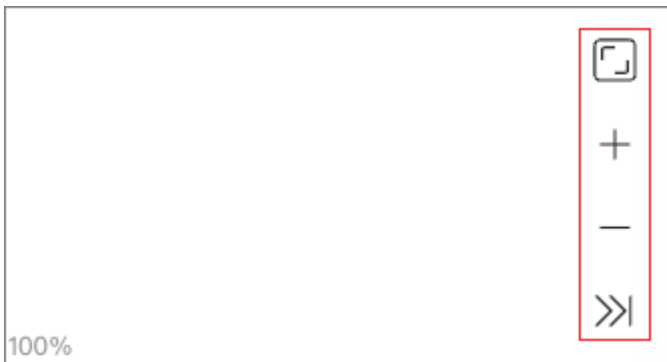

Data overview

On the right side of the page, click  to expand the data overview panel.

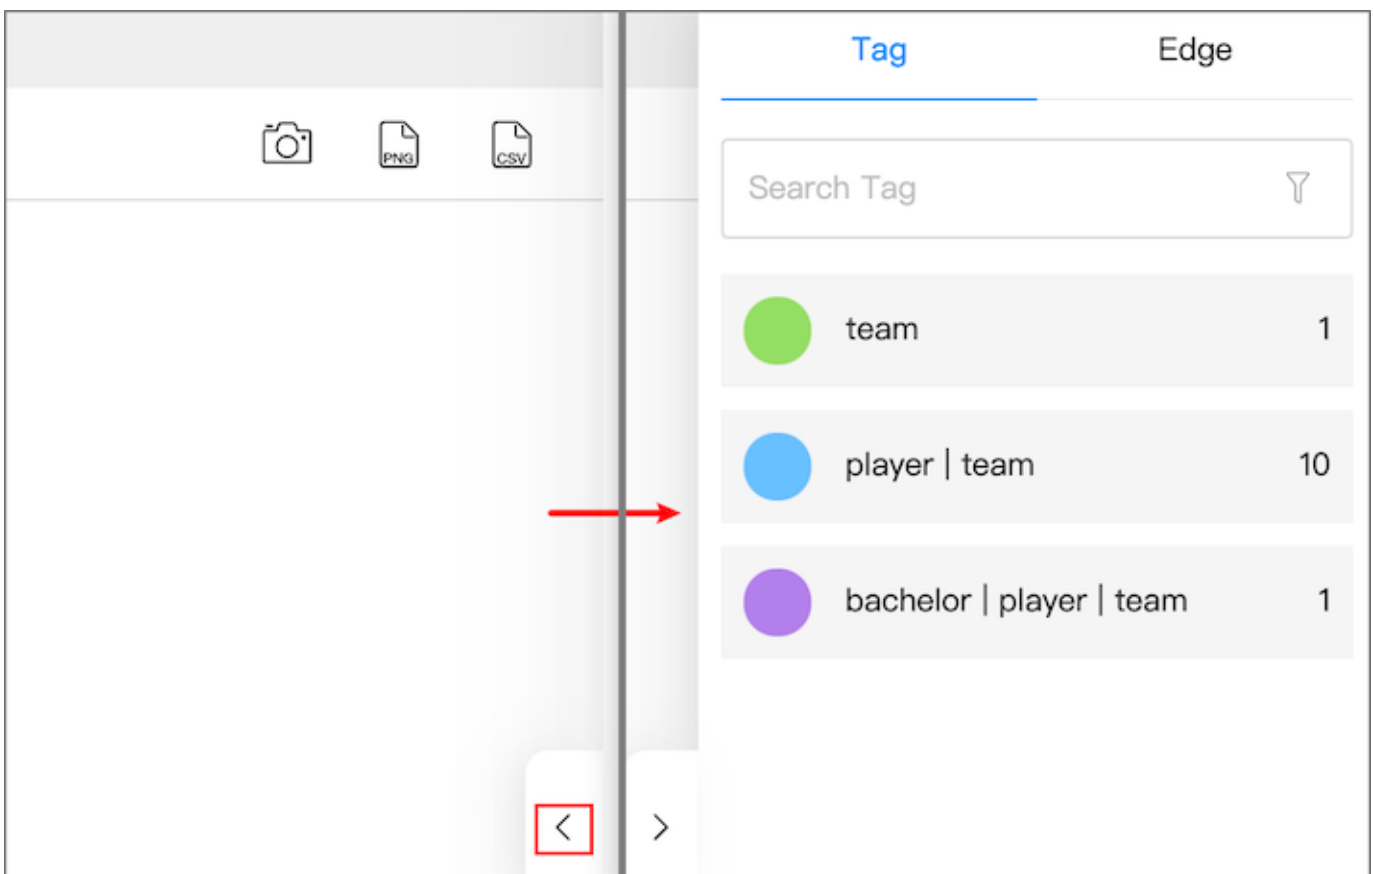

On the data overview panel, you are enabled to:

- See the number of tags and edge types, and the number of the corresponding vertices and edges on a canvas.
- Click the tag color icon to customize the color, size, and icon of the vertices with the same tag.

Note


Vertices with the same tag have the same color. Right-click on a single vertex on a canvas to manually modify the style of the vertex.

14.7.2 Visualization modes

Explorer provides **2D** and **3D** visualization modes for you to explore data. 2D enables you to operate on graph data and view data information. 3D lets you explore graph data from a different perspective. The 3D is suitable for cases with a large amount of data or situations requiring presentations.


Note

In 3D mode, operations on graph data are unavailable.

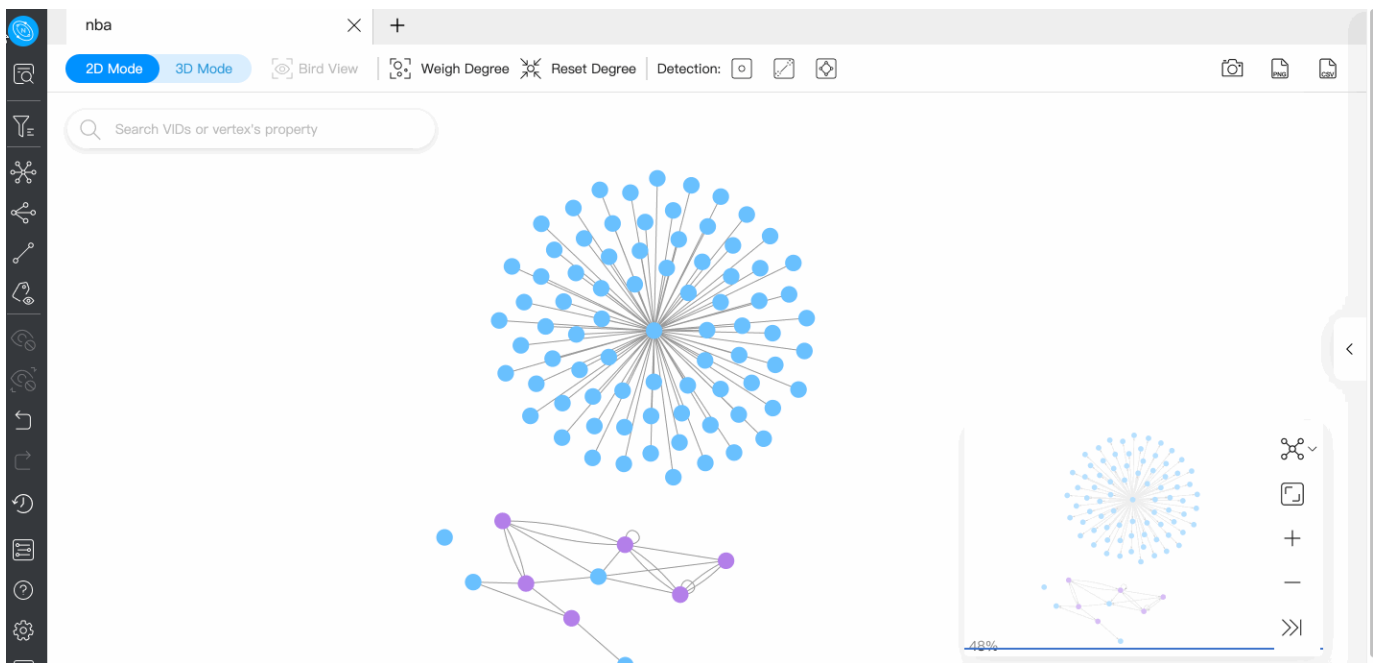

2D mode

Exploration of the data on a canvas is possible in 2D mode.

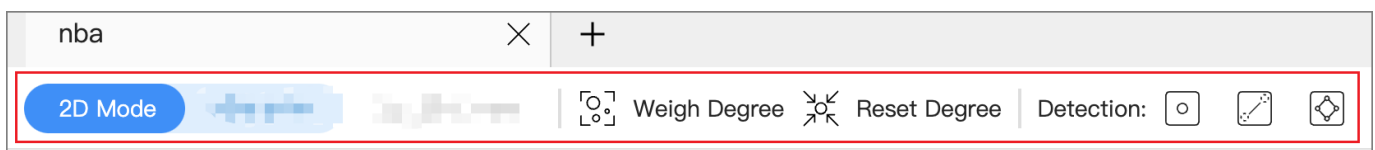

Parameter	Description
Weight Degree	Automatically resizes vertices according to the number of outgoing and incoming edges of all the vertices on the canvas.
Reset Degree	Resets the vertices on the canvas to their original size.
Detection	Outlier: Detects the vertices that connect no edges on a canvas. Hanging Edges: Detects the vertices with only one undirected edge on a canvas. Loop Detection: Detects the paths that connect a vertex to itself.

For more information about the operations available in 2D mode, see [Canvas](#).

3D mode

At the top left of the page, toggle the view button to switch to 3D mode. 3D mode allows you to switch back to 2D mode and does not influence operations in 2D.

Parameter	Description
Bird View	Shows a bird view of all the data in the current graph space (query with a minimum of 20,000 vertices and 2,000 edges).
Image Quality	High: Vertices are displayed in the form of balls with better light and shadow effects. Normal: Vertices are represented in a circle format and support a large amount of data.
Reheat	Disperses the distance between vertices when the vertices overlap.

Legacy version compatibility


For versions of Nebula Graph below 3.0.0, you need to create an index before using the Bird View feature. For more information, see [Create an index](#).

Last update: February 11, 2022

14.7.3 Manage snapshots

Explorer provides a snapshot feature that lets you store the visualized canvas data so that the data can be restored when your browser is opened again.


Create snapshots

1. In the upper right corner of a canvas page, click the camera icon .
2. Fill in the snapshot name and notes (optional).
3. Click **submit**.




Note

Created snapshots are stored on the snapshot list page. For more information, see below.

Historical snapshots

In the left navigation bar of the Explorer page, click  to enter the Snapshot page. You can switch graph spaces and view the historical snapshots of the corresponding graph space. You can also import snapshots to a canvas, download canvas snapshots to your local drive, and delete snapshots.

Under the **Operation** column to the right of the target snapshot, you are enabled to:

- Click  to import a historical snapshot to a new canvas.
- Click  to download a snapshot in JSON format locally.
- Click  to delete a snapshot.

At the top left of the **Snapshot** page, click **Import Snapshot** to import previously downloaded files in JSON format to the **Snapshot** page for sharing the snapshot data offline. The system automatically places the imported snapshots in the corresponding graph space based on the graph space information recorded in the JSON file.

Note

Up to 50 snapshots can be stored in the snapshot list currently.

Last update: February 10, 2022





14.8 Explorer console

Explorer console allows you to enter nGQL statements and import the query results into Explorer's canvas.

Note

Ensure that you have selected a target graph space before using the Explorer console.

14.8.1 Enter nGQL statements

1. In the left-side navigation bar, click .
2. In the input box of the console page, enter nGQL statements. For more information, see [nGQL cheatsheet](#).
3. Click the execution icon .
4. (Optional) Click  to view commands executed before.
5. (Optional) Click  to clear the current statement in the input box.

14.8.2 nGQL statement result display

In the lower area of the console page, the query results of the executed statements are displayed.

The results are displayed in the form of a table. You can click **Export CSV File** to store the data displayed in the table to your local drive.

The time taken to execute the statement in seconds (s) is displayed at the bottom of the table.

14.8.3 Import nGQL statement results to canvas

The query results can be imported to the canvas. Click **View Subgraphs**:

- **Insert After Clear:** Clears the data on the canvas and imports the data of the query results into the canvas.
- **Incremental Insertion:** Adds the data of the query results to the canvas based on the original data on the canvas. The same data will be overwritten.

Last update: February 10, 2022

14.9 Basic operations and shortcuts

This topic lists the basic operations and shortcuts supported in Explorer.

14.9.1 Basic operations

Operation	Description
Move a canvas	Hold down left click and drag the canvas.
Zoom in or out the canvas	Mouse wheel scrolls down to zoom in and up to zoom out.
Select one single vertex or edge	Left-click a vertex or an edge.
Select multiple vertices and edges	Hold Shift and left-click vertices and edges.
Batch selection	Hold down right click and frame vertices and edges; Or Hold Shift and hold down left click, and then frame vertices and edges.
Move selected vertices	Left-click the selected vertices and then move them.

14.9.2 Shortcuts

Operation	Description
Enter	Expand
Shift + '-'	Zoom out
Shift + '+'	Zoom in
Shift + 'I'	Display
Ctrl/Cmd + 'z'	Undo
Ctrl/Cmd + Shift + 'z'	Redo
Ctrl/Cmd + 'a'	Select all vertices.
Selected + 'del'	Hide the selected elements.
Selected + Shift + 'del'	Hide the unselected elements.

Last update: February 10, 2022

15. Nebula Importer

15.1 Nebula Importer

Nebula Importer (Importer) is a standalone import tool for CSV files with [Nebula Graph](#). Importer can read the local CSV file and then import the data into the Nebula Graph database.

15.1.1 Scenario

Importer is used to import the contents of a local CSV file into the Nebula Graph.

15.1.2 Advantage

- Lightweight and fast: no complex environment can be used, fast data import.
- Flexible filtering: You can flexibly filter CSV data through configuration files.

15.1.3 Release note

[Release](#)

15.1.4 Prerequisites

Before using Nebula Importer, make sure:

- Nebula Graph service has been deployed. There are currently three deployment modes:
 - [Deploy Nebula Graph with Docker Compose](#)
 - [Install Nebula Graph with RPM or DEB package](#)
 - [Install Nebula Graph by compiling the source code](#)
- Schema is created in Nebula Graph, including space, Tag and Edge type, or set by parameter `clientSettings.postStart.commands`.
- Golang environment has been deployed on the machine running the Importer. For details, see [Build Go environment](#).

15.1.5 Steps

Configure the YAML file and prepare the CSV file to be imported to use the tool to batch write data to Nebula Graph.

Download binary package and run

1. Download the [binary package](#) directly and add execute permission to it.
2. Start the service.

```
$ ./<binary_package_name> --config <yaml_config_file_path>
```

Source code compile and run

1. Clone repository.

```
$ git clone -b v3.0.0 https://github.com/vesoft-inc/nebula-importer.git
```


Note

Use the correct branch. Nebula Graph 2.x and 3.x have different RPC protocols.

2. Access the directory `nebula-importer`.

```
$ cd nebula-importer
```

3. Compile the source code.

```
$ make build
```

4. Start the service.

```
$ ./nebula-importer --config <yaml_config_file_path>
```

Note

For details about the YAML configuration file, see configuration file description at the end of topic.

No network compilation mode

If the server cannot be connected to the Internet, it is recommended to upload the source code and various dependency packages to the corresponding server for compilation on the machine that can be connected to the Internet. The operation steps are as follows:

1. Clone repository.

```
$ git clone -b 3.0.0 https://github.com/vesoft-inc/nebula-importer.git
```

2. Use the following command to download and package the dependent source code.

```
$ cd nebula-importer
$ go mod vendor
$ cd .. && tar -zcvf nebula-importer.tar.gz nebula-importer
```

3. Upload the compressed package to a server that cannot be connected to the Internet.

4. Unzip and compile.

```
$ tar -zxvf nebula-importer.tar.gz
$ cd nebula-importer
$ go build -mod vendor cmd/importer.go
```

Run in Docker mode

Instead of installing the Go locale locally, you can use Docker to pull the [image](#) of the Nebula Importer and mount the local configuration file and CSV data file into the container. The command is as follows:

```
$ docker run --rm -ti \
  --network=host \
  -v <config_file>:<config_file> \
  -v <csv_data_dir>:<csv_data_dir> \
  vesoft/nebula-importer:<version>
--config <config_file>
```

- `<config_file>`: The absolute path to the local YAML configuration file.
- `<csv_data_dir>`: The absolute path to the local CSV data file.
- `<version>`: Nebula Graph 2.x Please fill in 'v3'.

Note

A relative path is recommended. If you use a local absolute path, check that the path maps to the path in the Docker.

15.1.6 Configuration File Description

Nebula Importer uses configuration(`nebula-importer/examples/v2/example.yaml`) files to describe information about the files to be imported, the Nebula Graph server, and more. You can refer to the example configuration file: [Configuration without Header/Configuration with Header](#). This section describes the fields in the configuration file by category.

Note

If users download a binary package, create the configuration file manually.

Basic configuration

The example configuration is as follows:

```
version: v3
description: example
removeTempFiles: false
```

Parameter	Default value	Required	Description
<code>version</code>	v2	Yes	Target version of Nebula Graph.
<code>description</code>	example	No	Description of the configuration file.
<code>removeTempFiles</code>	false	No	Whether to delete temporarily generated logs and error data files.

Client configuration

The client configuration stores the configurations associated with Nebula Graph.

The example configuration is as follows:

```
clientSettings:
  retry: 3
  concurrency: 10
  channelBufferSize: 128
  space: test
  connection:
    user: user
    password: password
    address: 192.168.*.13:9669,192.168.*.14:9669
  postStart:
    commands: |
      UPDATE CONFIGS storage:wal_ttl=3600;
      UPDATE CONFIGS storage:rocksdb_column_family_options = { disable_auto_compactions = true };
    afterPeriod: 8s
  preStop:
    commands: |
```

```
UPDATE CONFIGS storage:wal_ttl=86400;
UPDATE CONFIGS storage:rocksdb_column_family_options = { disable_auto_compactions = false };
```

Parameter	Default value	Required	Description
<code>clientSettings.retry</code>	3	No	Retry times of nGQL statement execution failures.
<code>clientSettings.concurrency</code>	10	No	Number of Nebula Graph client concurrency.
<code>clientSettings.channelBufferSize</code>	128	No	Cache queue size per Nebula Graph client.
<code>clientSettings.space</code>	-	Yes	Specifies the Nebula Graph space to import the data into. Do not import multiple spaces at the same time to avoid performance impact.
<code>clientSettings.connection.user</code>	-	Yes	Nebula Graph user name.
<code>clientSettings.connection.password</code>	-	Yes	The password for the Nebula Graph user name.
<code>clientSettings.connection.address</code>	-	Yes	Addresses and ports for all Graph services.
<code>clientSettings.postStart.commands</code>	-	No	Configure some of the operations to perform after connecting to the Nebula Graph server, and before inserting data.
<code>clientSettings.postStart.afterPeriod</code>	-	No	The interval, between executing the above <code>commands</code> and executing the insert data command, such as <code>8s</code> .
<code>clientSettings.preStop.commands</code>	-	No	Configure some of the actions you performed before disconnecting from the Nebula Graph server.

File configuration

File configuration Stores the configuration of data files and logs, and details about the Schema.

FILE AND LOG CONFIGURATION

The example configuration is as follows:

```
logPath: ./err/test.log
files:
- path: ./student_without_header.csv
  failDataPath: ./err/studenterr.csv
  batchSize: 128
  limit: 10
  inOrder: false
  type: csv
  csv:
    withHeader: false
```

```
withLabel: false
delimiter: ","
```

Parameter	Default value	Required	Description
logPath	-	No	Path for exporting log information, such as errors during import.
files.path	-	Yes	Path for storing data files. If a relative path is used, the path is merged with the current configuration file directory. You can use an asterisk (*) for fuzzy matching to import multiple files with similar names, but the files need to be the same structure.
files.failDataPath	-	Yes	Insert the failed data file storage path, so that data can be written later.
files.batchSize	128	No	The number of statements inserting data in a batch.
files.limit	-	No	Limit on the number of rows of read data.
files.inOrder	-	No	Whether to insert rows in the file in order. If the value is set to <code>false</code> , the import rate decreases due to data skew.
files.type	-	Yes	The file type.
files.csv.withHeader	<code>false</code>	Yes	Whether there is a header.
files.csv.withLabel	<code>false</code>	Yes	Whether there is a label.
files.csv.delimiter	<code>","</code>	Yes	Specifies the delimiter for the CSV file. A string delimiter that supports only one character.

SCHEMA CONFIGURATION

Schema configuration describes the Meta information of the current data file. Schema types are vertex and edge. Multiple vertexes or edges can be configured at the same time.

- vertex configuration

The example configuration is as follows:

```
schema:
  type: vertex
  vertex:
    vid:
      type: string
      index: 0
    tags:
      - name: student
        props:
          - name: name
            type: string
            index: 1
          - name: age
            type: int
            index: 2
          - name: gender
```

```
type: string
index: 3
```

Parameter	Default value	Required	Description
<code>files.schema.type</code>	-	Yes	Schema type. Possible values are <code>vertex</code> and <code>edge</code> .
<code>files.schema.vertex.vid.type</code>	-	No	The data type of the vertex ID. Possible values are <code>int</code> and <code>string</code> .
<code>files.schema.vertex.vid.index</code>	-	No	The vertex ID corresponds to the column number in the CSV file.
<code>files.schema.vertex.tags.name</code>	-	Yes	Tag name.
<code>files.schema.vertex.tags.props.name</code>	-	Yes	Tag property name, which must match the Tag property in the Nebula Graph.
<code>files.schema.vertex.tags.props.type</code>	-	Yes	Property data type, supporting <code>bool</code> , <code>int</code> , <code>float</code> , <code>double</code> , <code>timestamp</code> and <code>string</code> .
<code>files.schema.vertex.tags.props.index</code>	-	No	Property corresponds to the sequence number of the column in the CSV file.

Note

The sequence numbers of the columns in the CSV file start from 0, that is, the sequence numbers of the first column are 0, and the sequence numbers of the second column are 1.

- edge configuration

The example configuration is as follows:

```
schema:
  type: edge
  edge:
    name: follow
    withRanking: true
    srcVID:
      type: string
      index: 0
    dstVID:
      type: string
      index: 1
    rank:
      index: 2
    props:
      - name: degree
```

```
type: double
index: 3
```

Parameter	Default value	Required	Description
<code>files.schema.type</code>	-	Yes	Schema type. Possible values are <code>vertex</code> and <code>edge</code> .
<code>files.schema.edge.name</code>	-	Yes	Edge type name.
<code>files.schema.edge.srcVID.type</code>	-	No	<code>srcVID.type</code> .
<code>files.schema.edge.srcVID.index</code>	-	No	The data type of the starting vertex ID of the edge.
<code>files.schema.edge.dstVID.type</code>	-	No	The data type of the destination vertex ID of the edge.
<code>files.schema.edge.dstVID.index</code>	-	No	The destination vertex ID of the edge corresponds to the column number in the CSV file.
<code>files.schema.edge.rank.index</code>	-	No	The rank value of the edge corresponds to the column number in the CSV file.
<code>files.schema.edge.props.name</code>	-	Yes	The Edge Type property name must match the Edge Type property in the Nebula Graph.
<code>files.schema.edge.props.type</code>	-	Yes	Property data type, supporting <code>bool</code> , <code>int</code> , <code>float</code> , <code>double</code> , <code>timestamp</code> and <code>string</code> .
<code>files.schema.edge.props.index</code>	-	No	Property corresponds to the sequence number of the column in the CSV file.

15.1.7 About the CSV file header

According to whether the CSV file has a header or not, the Importer needs to make different Settings on the configuration file. For relevant examples and explanations, please refer to:

- [Configuration without Header](#)
- [Configuration with Header](#)

Last update: February 15, 2022

15.2 Configuration with Header

For a CSV file with header, you need to set `withHeader` to `true` in the configuration file, indicating that the first behavior in the CSV file is the header. The header content has special meanings.

Caution

If the CSV file contains headers, the Importer will parse the Schema of each row of data according to the headers and ignore the vertex or edge settings in the YAML file.

15.2.1 Sample files

The following is an example of a CSV file with header:

- sample of vertex

Example data for `student_with_header.csv`:

```
:VID(string),student.name:string,student.age:int,student.gender:string
student100,Monica,16,female
student101,Mike,18,male
student102,Jane,17,female
```

The first column is the vertex ID, followed by the properties `name`, `age`, and `gender`.

- sample of edge

Example data for `follow_with_header.csv`:

```
:SRC_VID(string),:DST_VID(string),:RANK, follow.degree:double
student100,student101,0,92.5
student101,student100,1,85.6
student101,student102,2,93.2
student100,student102,1,96.2
```

The first two columns are the start vertex ID and destination vertex ID, respectively. The third column is rank, and the fourth column is property `degree`.

15.2.2 Header format description

The header defines the start vertex, the destination vertex, the rank, and some special functions by keywords as follows:

- `:VID` (mandatory): Vertex ID. Need to use `:VID(type)` form to set data type, for example `:VID(string)` or `:VID(int)`.
- `:SRC_VID` (mandatory): The start vertex ID of the edge. The data type needs to be set in the form `:SRC_VID(type)`.
- `:DST_VID` (mandatory): The destination vertex ID of the edge. The data type needs to be set in the form `:DST_VID(type)`.
- `:RANK` (optional): The rank value of the edge.
- `:IGNORE` (optional): Ignore this column when inserting data.
- `:LABEL` (optional): Insert (+) or delete (-) the row. Must be column 1. For example:

```
:LABEL,
+,
-,
```

Note

All columns except the `:LABEL` column can be sorted in any order, so for larger CSV files, the user has the flexibility to set the header to select the desired column.

For Tag or Edge type properties, the format is `<tag_name/edge_name>.<prop_name>:<prop_type>`, described as follows:

- `<tag_name/edge_name>`: Tag or Edge type name.
- `<prop_name>`: property name.
- `<prop_type>`: property type. Support `bool`, `int`, `float`, `double`, `timestamp` and `string`, default `string`.

Such as `student.name:string`, `follow.degree:double`.

15.2.3 Sample configuration

```
# Connected to the Nebula Graph version, set to v3 when connected to 3.x.
version: v3

description: example

# Whether to delete temporarily generated logs and error data files.
removeTempFiles: false

clientSettings:

  # Retry times of nGQL statement execution failures.
  retry: 3

  # Number of Nebula Graph client concurrency.
  concurrency: 10

  # Cache queue size per Nebula Graph client.
  channelBufferSize: 128

  # Specifies the Nebula Graph space to import the data into.
  space: student

  # Connection information.
  connection:
    user: root
    password: nebula
    address: 192.168.*.13:9669

postStart:
  # Configure some of the operations to perform after connecting to the Nebula Graph server, and before inserting data.
  commands: |
    DROP SPACE IF EXISTS student;
    CREATE SPACE IF NOT EXISTS student(partition_num=5, replica_factor=1, vid_type=FIXED_STRING(20));
    USE student;
    CREATE TAG student(name string, age int, gender string);
    CREATE EDGE follow(degree int);

  # The interval between the execution of the above command and the execution of the insert data command.
  afterPeriod: 15s

preStop:
  # Configure some of the actions you performed before disconnecting from the Nebula Graph server.
  commands: |

# Path of the error log file.
logPath: ./err/test.log

# CSV file Settings.
files:

  # Path for storing data files. If a relative path is used, the path is merged with the current configuration file directory. The first data file in this example
  # is vertex data.
  - path: ./student_with_header.csv

  # Insert the failed data file storage path, so that data can be written later.
  failDataPath: ./err/studenterr.csv

  # The number of statements inserting data in a batch.
  batchSize: 10

  # Limit on the number of rows of read data.
  limit: 10

  # Whether to insert rows in the file in order. If the value is set to false, the import rate decreases due to data skew.
  inOrder: true

  # File type. Currently, only CSV files are supported.
  type: csv

csv:
  # Whether there is a header.
  withHeader: true

  # Whether there is a LABEL.
  withLabel: false
```



```

# Specifies the delimiter for the CSV file. A string delimiter that supports only one character.
delimiter: ","

schema:
# Schema type. Possible values are vertex and edge.
type: vertex

# The second data file in this example is edge data.
- path: ./follow_with_header.csv
  failDataPath: ./err/followerr.csv
  batchSize: 10
  limit: 10
  inOrder: true
  type: csv
  csv:
    withHeader: true
    withLabel: false
  schema:
    # The type of Schema is edge.
    type: edge
    edge:
      # Edge type name.
      name: follow

# Whether to include rank.
withRanking: true

```

Note

The data type of the vertex ID must be the same as the data type of the statement in `clientSettings.postStart.commands` that creates the graph space.

Last update: February 15, 2022

15.3 Configuration without Header

For CSV files without header, you need to set `withHeader` to `false` in the configuration file, indicating that the CSV file contains only data (excluding the header of the first row). You may also need to set the data type and corresponding columns.

15.3.1 Sample files

The following is an example of a CSV file without header:

- sample of vertex

Example data for `student_without_header.csv`:

```
student100,Monica,16,female
student101,Mike,18,male
student102,Jane,17,female
```

The first column is the vertex ID, followed by the properties `name`, `age`, and `gender`.

- sample of edge

Example data for `follow_without_header.csv`:

```
student100,student101,0,92.5
student101,student100,1,85.6
student101,student102,2,93.2
student100,student102,1,96.2
```

The first two columns are the start vertex ID and destination vertex ID, respectively. The third column is rank, and the fourth column is property `degree`.

15.3.2 Sample configuration

```
# Connected to the Nebula Graph version, set to v3 when connected to 3.x.
version: v3

description: example

# Whether to delete temporarily generated logs and error data files.
removeTempFiles: false

clientSettings:

  # Retry times of nGQL statement execution failures.
  retry: 3

  # Number of Nebula Graph client concurrency.
  concurrency: 10

  # Cache queue size per Nebula Graph client.
  channelBufferSize: 128

  # Specifies the Nebula Graph space to import the data into.
  space: student

# Connection information.
connection:
  user: root
  password: nebula
  address: 192.168.*.13:9669

postStart:
  # Configure some of the operations to perform after connecting to the Nebula Graph server, and before inserting data.
  commands: |
    DROP SPACE IF EXISTS student;
    CREATE SPACE IF NOT EXISTS student(partition_num=5, replica_factor=1, vid_type=FIXED_STRING(20));
    USE student;
    CREATE TAG student(name string, age int,gender string);
    CREATE EDGE follow(degree int);

  # The interval between the execution of the above command and the execution of the insert data command.
  afterPeriod: 15s

preStop:
  # Configure some of the actions you performed before disconnecting from the Nebula Graph server.
  commands: |
```

```

# Path of the error log file.
logPath: ./err/test.log

# CSV file Settings.
files:

  # Path for storing data files. If a relative path is used, the path is merged with the current configuration file directory. The first data file in this example
  is vertex data.
  - path: ./student_without_header.csv

  # Insert the failed data file storage path, so that data can be written later.
  failDataPath: ./err/studenterr.csv

  # The number of statements inserting data in a batch.
  batchSize: 10

  # Limit on the number of rows of read data.
  limit: 10

  # Whether to insert rows in the file in order. If the value is set to false, the import rate decreases due to data skew.
  inOrder: true

  # File type. Currently, only CSV files are supported.
  type: csv

csv:
  # Whether there is a header.
  withHeader: false

  # Whether there is a LABEL.
  withLabel: false

  # Specifies the delimiter for the CSV file. A string delimiter that supports only one character.
  delimiter: ","

schema:
  # Schema type. Possible values are vertex and edge.
  type: vertex

vertex:

  # Vertex ID Settings.
  vid:
    # The vertex ID corresponds to the column number in the CSV file. Columns in the CSV file are numbered from 0.
    index: 0

    # The data type of the vertex ID. The optional values are int and string, corresponding to INT64 and FIXED_STRING in the Nebula Graph, respectively.
    type: string

  # Tag Settings.
  # Tag name.
  - name: student

    # property Settings in the Tag.
    props:
      # property name.
      - name: name

      # Property data type.
      type: string

      # Property corresponds to the sequence number of the column in the CSV file.
      index: 1

      - name: age
        type: int
        index: 2
      - name: gender
        type: string
        index: 3

  # The second data file in this example is edge data.
  - path: ./follow_without_header.csv
    failDataPath: ./err/followerr.csv
    batchSize: 10
    limit: 10
    inOrder: true
    type: csv
    csv:
      withHeader: false
      withLabel: false
    schema:
      # The type of Schema is edge.
      type: edge
      edge:
        # Edge type name.
        name: follow

      # Whether to include rank.
      withRanking: true

      # Start vertex ID setting.
      srcVID:

```

```

# Data type.
type: string

# The start vertex ID corresponds to the sequence number of a column in the CSV file.
index: 0

# Destination vertex ID.
dstVID:
  type: string
  index: 1

# rank setting.
rank:
  # Rank Indicates the rank number of a column in the CSV file. If index is not set, be sure to set the rank value in the third column. Subsequent columns
  set each property in turn.
  index: 2

# Edge Type property Settings.
props:
  # property name.
  - name: degree

  # Data type.
  type: double

  # Property corresponds to the sequence number of the column in the CSV file.
  index: 3

```

Note

- The sequence numbers of the columns in the CSV file start from 0, that is, the sequence numbers of the first column are 0, and the sequence numbers of the second column are 1.
- The data type of the vertex ID must be the same as the data type of the statement in `clientSettings.postStart.commands` that creates the graph space.
- If the index field is not specified, the CSV file must comply with the following rules:
- In the vertex data file, the first column must be the vertex ID, followed by the properties, and must correspond to the order in the configuration file.
- In the side data file, the first column must be the start vertex ID, the second column must be the destination vertex ID, if `withRanking` is `true`, the third column must be the rank value, and the following columns must be properties, and must correspond to the order in the configuration file.

Last update: February 15, 2022


16. Nebula Exchange

16.1 Introduction

16.1.1 What is Nebula Exchange

Nebula Exchange (Exchange) is an Apache Spark™ application for bulk migration of cluster data to Nebula Graph in a distributed environment, supporting batch and streaming data migration in a variety of formats.

Exchange consists of Reader, Processor, and Writer. After Reader reads data from different sources and returns a DataFrame, the Processor iterates through each row of the DataFrame and obtains the corresponding value based on the mapping between fields in the configuration file. After iterating through the number of rows in the specified batch, Writer writes the captured data to the Nebula Graph at once. The following figure illustrates the process by which Exchange completes the data conversion and migration.

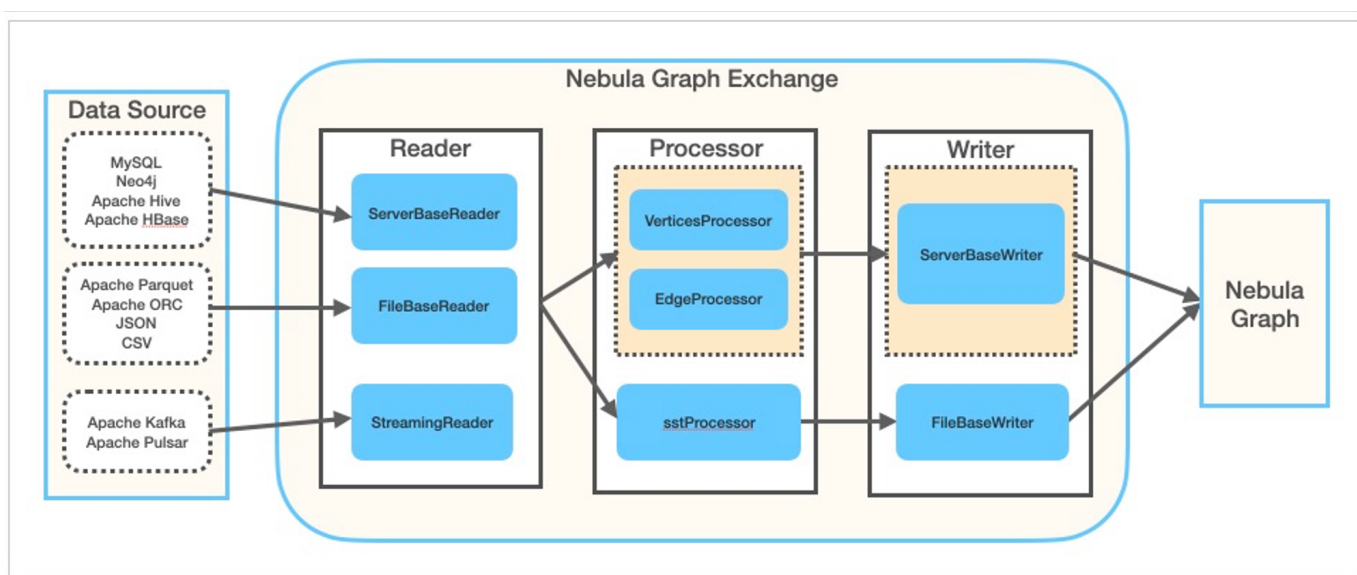

Editions

Exchange has two editions, the Community Edition and the Enterprise Edition. The Community Edition is open source developed on [GitHub](#). The Enterprise Edition supports not only the functions of the Community Edition but also adds additional features. For details, see [Comparisons](#).

Scenarios

Exchange applies to the following scenarios:

- Streaming data from Kafka and Pulsar platforms, such as log files, online shopping data, activities of game players, information on social websites, financial transactions or geospatial services, and telemetry data from connected devices or instruments in the data center, are required to be converted into the vertex or edge data of the property graph and import them into the Nebula Graph database.
- Batch data, such as data from a time period, needs to be read from a relational database (such as MySQL) or a distributed file system (such as HDFS), converted into vertex or edge data for a property graph, and imported into the Nebula Graph database.
- A large volume of data needs to be generated into SST files that Nebula Graph can recognize and then imported into the Nebula Graph database.
- The data saved in Nebula Graph needs to be exported.

Enterpriseonly

Exporting the data saved in Nebula Graph is supported by Exchange Enterprise Edition only.

Advantages

Exchange has the following advantages:

- High adaptability: It supports importing data into the Nebula Graph database in a variety of formats or from a variety of sources, making it easy to migrate data.
- SST import: It supports converting data from different sources into SST files for data import.
- SSL encryption: It supports establishing the SSL encryption between Exchange and Nebula Graph to ensure data security.
- Resumable data import: It supports resumable data import to save time and improve data import efficiency.

Note

Resumable data import is currently supported when migrating Neo4j data only.

- Asynchronous operation: An insert statement is generated in the source data and sent to the Graph service. Then the insert operation is performed.
- Great flexibility: It supports importing multiple Tags and Edge types at the same time. Different Tags and Edge types can be from different data sources or in different formats.
- Statistics: It uses the accumulator in Apache Spark™ to count the number of successful and failed insert operations.
- Easy to use: It adopts the Human-Optimized Config Object Notation (HOCON) configuration file format and has an object-oriented style, which is easy to understand and operate.

Data source

Exchange 3.0.0 supports converting data from the following formats or sources into vertexes and edges that Nebula Graph can recognize, and then importing them into Nebula Graph in the form of nGQL statements:

- Data stored in HDFS or locally:
 - [Apache Parquet](#)
 - [Apache ORC](#)
 - [JSON](#)
 - [CSV](#)
 - [Apache HBase™](#)
- Data repository:
 - [Hive](#)
 - [MaxCompute](#)
- Graph database: [Neo4j](#) (Client version 2.4.5-M1)
- Relational database:
 - [MySQL](#)
 - [PostgreSQL](#)
- Column database: [ClickHouse](#)
- Stream processing software platform: [Apache Kafka®](#)
- Publish/Subscribe messaging platform: [Apache Pulsar 2.4.5](#)

In addition to importing data as nGQL statements, Exchange supports generating SST files for data sources and then [importing SST](#) files via Console.

In addition, Exchange Enterprise Edition also supports [exporting data to a CSV file](#) using Nebula Graph as data sources.

Release note

[Release](#)

Last update: January 28, 2022

16.1.2 Limitations

This topic describes some of the limitations of using Exchange 3.x.

Version compatibility

The correspondence between the Nebula Exchange release (the JAR version) and the Nebula Graph core release is as follows.

Exchange client	Nebula Graph
3.0-SNAPSHOT	nightly
3.0.0	3.0.0
2.6.x	2.6.x
2.5.x	2.5.x
2.1.0	2.0.0, 2.0.1
2.0.1	2.0.0, 2.0.1
2.0.0	2.0.0, 2.0.1

JAR packages are available in two ways: [compile them yourself](#) or download them from the Maven repository.

If you are using Nebula Graph 1.x, use [Nebula Exchange 1.x](#).

Environment

Exchange 3.x supports the following operating systems:

- CentOS 7
- macOS

Software dependencies

To ensure the healthy operation of Exchange, ensure that the following software has been installed on the machine:

- Java version 1.8
- Scala version 2.10.7, 2.11.12, or 2.12.10
- Apache Spark. The requirements for Spark versions when using Exchange to export data from data sources are as follows. In the following table, Y means that the corresponding Spark version is supported, and N means not supported.

Note

Use the correct Exchange JAR file based on the Spark version. For example, for Spark version 2.4, use nebula-exchange_spark_2.4-3.0.0.jar.

Data source	Spark 2.2	Spark 2.4	Spark 3
CSV file	Y	N	Y
JSON file	Y	Y	Y
ORC file	Y	Y	Y
Parquet file	Y	Y	Y
HBase	Y	Y	Y
MySQL	Y	Y	Y
PostgreSQL	Y	Y	Y
ClickHouse	Y	Y	Y
Neo4j	N	Y	N
Hive	Y	Y	Y
MaxCompute	N	Y	N
Pulsar	N	Y	Untested
Kafka	N	Y	Untested
Nebula Graph	N	Y	N

Hadoop Distributed File System (HDFS) needs to be deployed in the following scenarios:

- Migrate HDFS data
- Generate SST files

Last update: February 16, 2022

16.2 Get Exchange

This topic introduces how to get the JAR file of Nebula Exchange.

16.2.1 Download the JAR file directly

The JAR file of Exchange Community Edition can be [downloaded](#) directly.

To download Exchange Enterprise Edition, [get Nebula Graph Enterprise Edition Package](#) first.

16.2.2 Get the JAR file by compiling the source code

You can get the JAR file of Exchange Community Edition by compiling the source code. The following introduces how to compile the source code of Exchange.

Enterpriseonly

You can get Exchange Enterprise Edition in Nebula Graph Enterprise Edition Package only.

Prerequisites

- Install [Maven](#).
- Install the correct version of Apache Spark. Exporting data from different sources requires different Spark versions. For more information, see [Software dependencies](#).

16.2.3 Steps

1. Clone the repository `nebula-exchange` in the `/` directory.

```
git clone -b v3.0.0 https://github.com/vesoft-inc/nebula-exchange.git
```

2. Switch to the directory `nebula-exchange`.

```
cd nebula-exchange
```

3. Package Nebula Exchange. Run the following command based on the Spark version:

- For Spark 2.2¹

```
mvn clean package -Dmaven.test.skip=true -Dgpg.skip -Dmaven.javadoc.skip=true \
-pl nebula-exchange_spark_2.2 -am -Pscala-2.11 -Pspark-2.2
```

- For Spark 2.4²

```
mvn clean package -Dmaven.test.skip=true -Dgpg.skip -Dmaven.javadoc.skip=true \
-pl nebula-exchange_spark_2.4 -am -Pscala-2.11 -Pspark-2.4
```

- For Spark 3.0³

```
mvn clean package -Dmaven.test.skip=true -Dgpg.skip -Dmaven.javadoc.skip=true \
-pl nebula-exchange_spark_3.0 -am -Pscala-2.12 -Pspark-3.0
```

After the compilation is successful, you can find the `nebula-exchange_spark_x.x-v3.0.0.jar` file in the `nebula-exchange_spark_x.x/target/` directory. `x.x` indicates the Spark version, for example, `2.4`.

Note

The JAR file version changes with the release of the Nebula Java Client. Users can view the latest version on the [Releases](#) page.

When migrating data, you can refer to configuration file `target/classes/application.conf`.

Failed to download the dependency package

If downloading dependencies fails when compiling:

- Check the network settings and ensure that the network is normal.
- Modify the `mirror` part of Maven installation directory `libexec/conf/settings.xml`:

```
<mirror>
  <id>alimaven</id>
  <mirrorOf>central</mirrorOf>
  <name>aliyun maven</name>
  <url>http://maven.aliyun.com/nexus/content/repositories/central/</url>
</mirror>
```

Last update: January 19, 2022

16.3 Exchange configurations

16.3.1 Options for import

After editing the configuration file, run the following commands to import specified source data into the Nebula Graph database.

- First import

```
<spark_install_path>/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-2.x.y.jar_path> -c <application.conf_path>
```

- Import the reload file

If some data fails to be imported during the first import, the failed data will be stored in the reload file. Use the parameter `-r` to import the reload file.

```
<spark_install_path>/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-2.x.y.jar_path> -c <application.conf_path> -r
"<reload_file_path>"
```

Note

The version number of a JAR file is subject to the name of the JAR file that is actually compiled.

Note

If users use the [yarn-cluster mode](#) to submit a job, see the following command:

```
$SPARK_HOME/bin/spark-submit --master yarn-cluster \
--class com.vesoft.nebula.exchange.Exchange \
--files application.conf \
--conf spark.driver.extraClassPath=./ \
--conf spark.executor.extraClassPath=./ \
nebula-exchange-3.0.0.jar \
-c application.conf
```

The following table lists command parameters.

Parameter	Required	Default value	Description
<code>--class</code>	Yes	-	Specify the main class of the driver.
<code>--master</code>	Yes	-	Specify the URL of the master process in a Spark cluster. For more information, see master-urls .
<code>-c / --config</code>	Yes	-	Specify the path of the configuration file.
<code>-h / --hive</code>	No	<code>false</code>	Indicate support for importing Hive data.
<code>-D / --dry</code>	No	<code>false</code>	Check whether the format of the configuration file meets the requirements, but it does not check whether the configuration items of <code>tags</code> and <code>edges</code> are correct. This parameter cannot be added when users import data.
<code>-r / --reload</code>	No	-	Specify the path of the reload file that needs to be reloaded.

For more Spark parameter configurations, see [Spark Configuration](#).

Last update: January 14, 2022

16.3.2 Parameters in the configuration file

This topic describes how to configure the file `application.conf` when users use Nebula Exchange.

Before configuring the `application.conf` file, it is recommended to copy the file name `application.conf` and then edit the file name according to the file type of a data source. For example, change the file name to `csv_application.conf` if the file type of the data source is CSV.

The `application.conf` file contains the following content types:

- Spark configurations
- Hive configurations (optional)
- Nebula Graph configurations
- Vertex configurations
- Edge configurations

Spark configurations

This topic lists only some Spark parameters. For more information, see [Spark Configuration](#).

Parameter	Type	Default value	Required	Description
<code>spark.app.name</code>	string	-	No	The drive name in Spark.
<code>spark.driver.cores</code>	int	1	No	The number of CPU cores used by a driver, only applicable to a cluster mode.
<code>spark.driver.maxResultSize</code>	string	1G	No	The total size limit (in bytes) of the serialized results of all partitions in a single Spark operation (such as collect). The minimum value is 1M, and 0 means unlimited.
<code>spark.executor.memory</code>	string	1G	No	The amount of memory used by a Spark driver which can be specified in units, such as 512M or 1G.
<code>spark.cores.max</code>	int	16	No	The maximum number of CPU cores of applications requested across clusters (rather than from each node) when a driver runs in a coarse-grained sharing mode on a standalone cluster or a Mesos cluster. The default value is <code>spark.deploy.defaultCores</code> on a Spark standalone cluster manager or the value of the <code>infinite</code> parameter (all available cores) on Mesos.

Hive configurations (optional)

Users only need to configure parameters for connecting to Hive if Spark and Hive are deployed in different clusters. Otherwise, please ignore the following configurations.

Parameter	Type	Default value	Required	Description
<code>hive.warehouse</code>	string	-	Yes	The warehouse path in HDFS. Enclose the path in double quotes and start with <code>hdfs://</code> .
<code>hive.connectionURL</code>	string	-	Yes	The URL of a JDBC connection. For example, <code>"jdbc:mysql://127.0.0.1:3306/hive_spark?characterEncoding=UTF-8"</code> .
<code>hive.connectionDriverName</code>	string	<code>"com.mysql.jdbc.Driver"</code>	Yes	The driver name.
<code>hive.connectionUserName</code>	list[string]	-	Yes	The username for connections.
<code>hive.connectionPassword</code>	list[string]	-	Yes	The account password.

Nebula Graph configurations

Parameter	Type	Default value	Required	Description
<code>nebula.address.graph</code>	<code>list[string]</code>	<code>["127.0.0.1:9669"]</code>	Yes	The addresses of all Graph services, including IPs and ports, separated by commas (,). Example: <code>["ip1:port1", "ip2:port2", "ip3:port3"]</code> .
<code>nebula.address.meta</code>	<code>list[string]</code>	<code>["127.0.0.1:9559"]</code>	Yes	The addresses of all Meta services, including IPs and ports, separated by commas (,). Example: <code>["ip1:port1", "ip2:port2", "ip3:port3"]</code> .
<code>nebula.user</code>	<code>string</code>	-	Yes	The username with write permissions for Nebula Graph.
<code>nebula.pswd</code>	<code>string</code>	-	Yes	The account password.
<code>nebula.space</code>	<code>string</code>	-	Yes	The name of the graph space where data is to be imported.
<code>nebula.ssl.enable.graph</code>	<code>bool</code>	<code>false</code>	Yes	Enables the SSL encryption between Exchange and Graph services. If the value is <code>true</code> , SSL encryption is enabled and the following parameters take effect. If Exchange is not a multi-machine cluster, you need to store the corresponding files in the same path on each machine when setting the following SSL parameters.
<code>nebula.ssl.sign</code>	<code>string</code>	<code>ca</code>	Yes	Specifies the SSL sign. Optional values are <code>ca</code> and <code>self</code> .
<code>nebula.ssl.ca.param.caCrtFilePath</code>	<code>string</code>	Specifies the storage path of the CA certificate. It takes effect when the value of <code>nebula.ssl.sign</code> is <code>ca</code> .		
<code>nebula.ssl.ca.param.crtFilePath</code>	<code>string</code>	<code>"/path/crtFilePath"</code>	Yes	Specifies the storage path of the CRT certificate. It takes effect when the value of <code>nebula.ssl.sign</code> is <code>ca</code> .
<code>nebula.ssl.ca.param.keyFilePath</code>	<code>string</code>	<code>"/path/keyFilePath"</code>	Yes	Specifies the storage path of the key file. It takes effect when the value of <code>nebula.ssl.sign</code> is <code>ca</code> .
<code>nebula.ssl.self.param.crtFilePath</code>	<code>string</code>	<code>"/path/crtFilePath"</code>	Yes	Specifies the storage path of the CRT certificate. It takes effect when the value of <code>nebula.ssl.sign</code> is <code>self</code> .
<code>nebula.ssl.self.param.keyFilePath</code>	<code>string</code>	<code>"/path/keyFilePath"</code>	Yes	Specifies the storage path of the key file. It takes effect when the value of <code>nebula.ssl.sign</code> is <code>self</code> .
<code>nebula.ssl.self.param.password</code>	<code>string</code>	<code>"nebula"</code>	Yes	Specifies the storage path of the password file. It takes effect when the value of <code>nebula.ssl.sign</code> is <code>self</code> .
<code>nebula.path.local</code>	<code>string</code>	<code>"/tmp"</code>	No	The local SST file path which needs to be specified when users import SST files.
<code>nebula.path.remote</code>	<code>string</code>	<code>"/sst"</code>	No	The remote SST file path which needs to be specified when users import SST files.

Parameter	Type	Default value	Required	Description
nebula.path.hdfs.namenode	string	"hdfs://name_node:9000"	No	The NameNode path which needs to be configured when users import SST files.
nebula.connection.timeout	int	3000	No	The timeout set for Thrift connections.
nebula.connection.retry	int	3	No	Retries set for Thrift connections.
nebula.execution.retry	int	3	No	Retries set for executing nGQL statements.
nebula.error.max	int	32	No	The maximum number of failures during the import process. When the number of failures reaches the maximum, the Spark job submission will stop automatically.
nebula.error.output	string	/tmp/errors	No	The path to output error logs. Failed nGQL statement executions are saved in the error log.
nebula.rate.limit	int	1024	No	The limit on the number of tokens in the token bucket when importing data.
nebula.rate.timeout	int	1000	No	The timeout period for getting tokens from the token bucket. Unit: milliseconds.

Vertex configurations

For different data sources, the vertex configurations are different. There are many general parameters and some specific parameters. General parameters and specific parameters of different data sources need to be configured when users configure vertices.

GENERAL PARAMETERS

Parameter	Type	Default value	Required	Description
<code>tags.name</code>	string	-	Yes	The tag name defined in Nebula Graph.
<code>tags.type.source</code>	string	-	Yes	Specify a data source. For example, <code>csv</code> .
<code>tags.type.sink</code>	string	<code>client</code>	Yes	Specify an import method. Optional values are <code>client</code> and <code>SST</code> .
<code>tags.fields</code>	list[string]	-	Yes	The header or column name of the column corresponding to properties. If there is a header or a column name, please use that name directly. If a CSV file does not have a header, use the form of <code>[_c0, _c1, _c2]</code> to represent the first column, the second column, the third column, and so on.
<code>tags.nebula.fields</code>	list[string]	-	Yes	Property names defined in Nebula Graph, the order of which must correspond to <code>tags.fields</code> . For example, <code>[_c1, _c2]</code> corresponds to <code>[name, age]</code> , which means that values in the second column are the values of the property <code>name</code> , and values in the third column are the values of the property <code>age</code> .
<code>tags.vertex.field</code>	string	-	Yes	The column of vertex IDs. For example, when a CSV file has no header, users can use <code>_c0</code> to indicate values in the first column are vertex IDs.
<code>tags.batch</code>	int	256	Yes	The maximum number of vertices written into Nebula Graph in a single batch.
<code>tags.partition</code>	int	32	Yes	The number of Spark partitions.

SPECIFIC PARAMETERS OF PARQUET/JSON/ORC DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.path</code>	string	-	Yes	The path of vertex data files in HDFS. Enclose the path in double quotes and start with <code>hdfs://</code> .

SPECIFIC PARAMETERS OF CSV DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.path</code>	string	-	Yes	The path of vertex data files in HDFS. Enclose the path in double quotes and start with <code>hdfs://</code> .
<code>tags.separator</code>	string	<code>,</code>	Yes	The separator. The default value is a comma (,).
<code>tags.header</code>	bool	<code>true</code>	Yes	Whether the file has a header.

SPECIFIC PARAMETERS OF HIVE DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.exec</code>	string	-	Yes	The statement to query data sources. For example, <code>select name,age from mooc.users</code> .

SPECIFIC PARAMETERS OF MAXCOMPUTE DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.table</code>	string	-	Yes	The table name of the MaxCompute.
<code>tags.project</code>	string	-	Yes	The project name of the MaxCompute.
<code>tags.odpsUrl</code>	string	-	Yes	The odpsUrl of the MaxCompute service. For more information about odpsUrl, see Endpoints .
<code>tags.tunnelUrl</code>	string	-	Yes	The tunnelUrl of the MaxCompute service. For more information about tunnelUrl, see Endpoints .
<code>tags.accessKeyId</code>	string	-	Yes	The accessKeyId of the MaxCompute service.
<code>tags.accessKeySecret</code>	string	-	Yes	The accessKeySecret of the MaxCompute service.
<code>tags.partitionSpec</code>	string	-	No	Partition descriptions of MaxCompute tables.
<code>tags.sentence</code>	string	-	No	Statements to query data sources. The table name in the SQL statement is the same as the value of the table above.

SPECIFIC PARAMETERS OF NEO4J DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.exec</code>	string	-	Yes	Statements to query data sources. For example: <code>match (n:label) return n.neo4j-field-0</code> .
<code>tags.server</code>	string	<code>"bolt://127.0.0.1:7687"</code>	Yes	The server address of Neo4j.
<code>tags.user</code>	string	-	Yes	The Neo4j username with read permissions.
<code>tags.password</code>	string	-	Yes	The account password.
<code>tags.database</code>	string	-	Yes	The name of the database where source data is saved in Neo4j.
<code>tags.check_point_path</code>	string	<code>/tmp/test</code>	No	The directory set to import progress information, which is used for resuming transfers. If not set, the resuming transfer is disabled.

SPECIFIC PARAMETERS OF MYSQL/POSTGRESQL DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.host</code>	string	-	Yes	The MySQL/PostgreSQL server address.
<code>tags.port</code>	string	-	Yes	The MySQL/PostgreSQL server port.
<code>tags.database</code>	string	-	Yes	The database name.
<code>tags.table</code>	string	-	Yes	The name of a table used as a data source.
<code>tags.user</code>	string	-	Yes	The MySQL/PostgreSQL username with read permissions.
<code>tags.password</code>	string	-	Yes	The account password.
<code>tags.sentence</code>	string	-	Yes	Statements to query data sources. For example: "select teamid, name from basketball.team order by teamid;"

SPECIFIC PARAMETERS OF CLICKHOUSE DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.url</code>	string	-	Yes	The JDBC URL of ClickHouse.
<code>tags.user</code>	string	-	Yes	The ClickHouse username with read permissions.
<code>tags.password</code>	string	-	Yes	The account password.
<code>tags.numPartition</code>	string	-	Yes	The number of ClickHouse partitions.
<code>tags.sentence</code>	string	-	Yes	Statements to query data sources.

SPECIFIC PARAMETERS OF HBASE DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.host</code>	string	127.0.0.1	Yes	The Hbase server address.
<code>tags.port</code>	string	2181	Yes	The Hbase server port.
<code>tags.table</code>	string	-	Yes	The name of a table used as a data source.
<code>tags.columnFamily</code>	string	-	Yes	The column family to which a table belongs.

SPECIFIC PARAMETERS OF PULSAR DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.service</code>	string	<code>"pulsar://localhost:6650"</code>	Yes	The Pulsar server address.
<code>tags.admin</code>	string	<code>"http://localhost:8081"</code>	Yes	The admin URL used to connect pulsar.
<code>tags.options.<topic\ topics\ topicsPattern></code>	string	-	Yes	Options offered by Pulsar, which can be configured by choosing one from <code>topic</code> , <code>topics</code> , and <code>topicsPattern</code> .
<code>tags.interval.seconds</code>	int	<code>10</code>	Yes	The interval for reading messages. Unit: seconds.

SPECIFIC PARAMETERS OF KAFKA DATA SOURCES

Parameter	Type	Default value	Required	Description
<code>tags.service</code>	string	-	Yes	The Kafka server address.
<code>tags.topic</code>	string	-	Yes	The message type.
<code>tags.interval.seconds</code>	int	<code>10</code>	Yes	The interval for reading messages. Unit: seconds.

SPECIFIC PARAMETERS FOR GENERATING SST FILES

Parameter	Type	Default value	Required	Description
<code>tags.path</code>	string	-	Yes	The path of the source file specified to generate SST files.
<code>tags.repartitionWithNebula</code>	bool	<code>false</code>	No	Whether to repartition data based on the number of partitions of graph spaces in Nebula Graph when generating the SST file. Enabling this function can reduce the time required to DOWNLOAD and INGEST SST files.

SPECIFIC PARAMETERS OF NEBULA GRAPH

Enterpriseonly

Specific parameters of Nebula Graph are used for exporting Nebula Graph data, which is supported by Exchange Enterprise Edition only.

Parameter	Data type	Default value	Required	Description
<code>tags.path</code>	string	<code>"hdfs://namenode:9000/path/vertex"</code>	Yes	Specifies the storage path of the CSV file. You need to set a new path and Exchange will automatically create the path you set. If you store the data to the HDFS server, the path format is the same as the default value, such as <code>"hdfs://192.168.8.177:9000/vertex/player"</code> . If you store the data to the local, the path format is <code>"file:///path/vertex"</code> , such as <code>"file:///home/nebula/vertex/player"</code> . If there are multiple Tags, different directories must be set for each Tag.
<code>tags.noField</code>	bool	<code>false</code>	Yes	If the value is <code>true</code> , only VIDs will be exported, not the property data. If the value is <code>false</code> , VIDs and the property data will be exported.
<code>tags.return.fields</code>	list	<code>[]</code>	Yes	Specifies the properties to be exported. For example, to export the <code>name</code> and <code>age</code> , you need to set the parameter value to <code>["name", "age"]</code> . This parameter only takes effect when the value of <code>tags.noField</code> is <code>false</code> .

Edge configurations

For different data sources, configurations of edges are also different. There are general parameters and some specific parameters. General parameters and specific parameters of different data sources need to be configured when users configure edges.

For the specific parameters of different data sources for edge configurations, please refer to the introduction of specific parameters of different data sources above, and pay attention to distinguishing tags and edges.

GENERAL PARAMETERS

Parameter	Type	Default value	Required	Description
<code>edges.name</code>	string	-	Yes	The edge type name defined in Nebula Graph.
<code>edges.type.source</code>	string	-	Yes	The data source of edges. For example, <code>csv</code> .
<code>edges.type.sink</code>	string	<code>client</code>	Yes	The method specified to import data. Optional values are <code>client</code> and <code>SST</code> .
<code>edges.fields</code>	list[string]	-	Yes	The header or column name of the column corresponding to properties. If there is a header or column name, please use that name directly. If a CSV file does not have a header, use the form of <code>[_c0, _c1, _c2]</code> to represent the first column, the second column, the third column, and so on.
<code>edges.nebula.fields</code>	list[string]	-	Yes	Edge names defined in Nebula Graph, the order of which must correspond to <code>edges.fields</code> . For example, <code>[_c2, _c3]</code> corresponds to <code>[start_year, end_year]</code> , which means that values in the third column are the values of the start year, and values in the fourth column are the values of the end year.
<code>edges.source.field</code>	string	-	Yes	The column of source vertices of edges. For example, <code>_c0</code> indicates a value in the first column that is used as the source vertex of an edge.
<code>edges.target.field</code>	string	-	Yes	The column of destination vertices of edges. For example, <code>_c0</code> indicates a value in the first column that is used as the destination vertex of an edge.
<code>edges.ranking</code>	int	-	No	The column of rank values. If not specified, all rank values are <code>0</code> by default.
<code>edges.batch</code>	int	<code>256</code>	Yes	The maximum number of edges written into Nebula Graph in a single batch.
<code>edges.partition</code>	int	<code>32</code>	Yes	The number of Spark partitions.

SPECIFIC PARAMETERS FOR GENERATING SST FILES

Parameter	Type	Default value	Required	Description
<code>edges.path</code>	string	-	Yes	The path of the source file specified to generate SST files.
<code>edges.repartitionWithNebula</code>	bool	<code>false</code>	No	Whether to repartition data based on the number of partitions of graph spaces in Nebula Graph when generating the SST file. Enabling this function can reduce the time required to DOWNLOAD and INGEST SST files.

SPECIFIC PARAMETERS OF NEBULA GRAPH

Parameter	Type	Default value	Required	Description
<code>edges.path</code>	string	<code>"hdfs://namenode:9000/path/edge"</code>	Yes	Specifies the storage path of the CSV file. You need to set a new path and Exchange will automatically create the path you set. If you store the data to the HDFS server, the path format is the same as the default value, such as <code>"hdfs://192.168.8.177:9000/edge/follow"</code> . If you store the data to the local, the path format is <code>"file:///path/edge"</code> , such as <code>"file:///home/nebula/edge/follow"</code> . If there are multiple Edges, different directories must be set for each Edge.
<code>edges.noField</code>	bool	<code>false</code>	Yes	If the value is <code>true</code> , source vertex IDs, destination vertex IDs, and ranks will be exported, not the property data. If the value is <code>false</code> , ranks, source vertex IDs, destination vertex IDs, ranks, and the property data will be exported.
<code>edges.return.fields</code>	list	<code>[]</code>	Yes	Specifies the properties to be exported. For example, to export <code>start_year</code> and <code>end_year</code> , you need to set the parameter value to <code>["start_year", "end_year"]</code> . This parameter only takes effect when the value of <code>edges.noField</code> is <code>false</code> .

Last update: January 28, 2022

16.4 Use Nebula Exchange

16.4.1 Import data from CSV files

This topic provides an example of how to use Exchange to import Nebula Graph data stored in HDFS or local CSV files.

To import a local CSV file to Nebula Graph, see [Nebula Importer](#).

Data set

This topic takes the [basketballplayer dataset](#) as an example.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been [installed](#) and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been [compiled](#), or [download](#) the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- If files are stored in HDFS, ensure that the Hadoop service is running normally.
- If files are stored locally and Nebula Graph is a cluster architecture, you need to place the files in the same directory locally on each machine in the cluster.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: PROCESS CSV FILES

Confirm the following information:

1. Process CSV files to meet Schema requirements.

Note

Exchange supports uploading CSV files with or without headers.

2. Obtain the CSV file storage path.

STEP 3: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set CSV data source configuration. In this example, the copied file is called `csv_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 1G
    }
    executor: {
      memory: 1G
    }
    cores {
      max: 16
    }
  }
}
```

```

}
}

# Nebula Graph configuration
nebula: {
  address: {
    # Specify the IP addresses and ports for Graph and Meta services.
    # If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
    # Addresses are separated by commas.
    graph: ["127.0.0.1:9669"]
    meta: ["127.0.0.1:9559"]
  }

  # The account entered must have write permission for the Nebula Graph space.
  user: root
  pswd: nebula

  # Fill in the name of the graph space you want to write data to in the Nebula Graph.
  space: basketballplayer
  connection {
    timeout: 3000
    retry: 3
  }
  execution {
    retry: 3
  }
  error: {
    max: 32
    output: /tmp/errors
  }
  rate: {
    limit: 1024
    timeout: 1000
  }
}

# Processing vertexes
tags: [
  # Set the information about the Tag player.
  {
    # Specify the Tag name defined in Nebula Graph.
    name: player
    type: {
      # Specify the data source file format to CSV.
      source: csv

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    # Specify the path to the CSV file.
    # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example: "hdfs://ip:port/xx/xx".
    # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example: "file:///tmp/xx.csv".
    path: "hdfs://192.168.*.:9000/data/vertex_player.csv"

    # If the CSV file does not have a header, use [_c0, _c1, _c2, ..., _cn] to represent its header and indicate the columns as the source of the property values.
    # If the CSV file has headers, use the actual column names.
    fields: [_c1, _c2]

    # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    nebula.fields: [age, name]

    # Specify a column of data in the table as the source of vertex VID in the Nebula Graph.
    # The value of vertex must be the same as the column names in the above fields or csv.fields.
    # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
    vertex: {
      field: _c0
      # policy: hash
    }

    # The delimiter specified. The default value is comma.
    separator: ",",

    # If the CSV file has a header, set the header to true.
    # If the CSV file does not have a header, set the header to false. The default value is false.
    header: false

    # The number of data written to Nebula Graph in a single batch.
    batch: 256

    # The number of Spark partitions.
    partition: 32
  }
]

# Set the information about the Tag Team.
{
  # Specify the Tag name defined in Nebula Graph.
  name: team
  type: {
    # Specify the data source file format to CSV.
    source: csv

    # Specify how to import the data into Nebula Graph: Client or SST.

```

```

    sink: client
  }

  # Specify the path to the CSV file.
  # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example: "hdfs://ip:port/xx/xx".
  # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example: "file:///tmp/xx.csv".
  path: "hdfs://192.168.*.*:9000/data/vertex_team.csv"

  # If the CSV file does not have a header, use [_c0, _c1, _c2, ..., _cn] to represent its header and indicate the columns as the source of the property values.
  # If the CSV file has headers, use the actual column names.
  fields: [_c1]

  # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
  # The sequence of fields and nebula.fields must correspond to each other.
  nebula.fields: [name]

  # Specify a column of data in the table as the source of VIDs in the Nebula Graph.
  # The value of vertex must be the same as the column names in the above fields or csv.fields.
  # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
  vertex: {
    field: _c0
    # policy: hash
  }

  # The delimiter specified. The default value is comma.
  separator: ",",

  # If the CSV file has a header, set the header to true.
  # If the CSV file does not have a header, set the header to false. The default value is false.
  header: false

  # The number of data written to Nebula Graph in a single batch.
  batch: 256

  # The number of Spark partitions.
  partition: 32
}

# If more vertexes need to be added, refer to the previous configuration to add them.
]
# Processing edges
edges: [
  # Set the information about the Edge Type follow.
  {
    # Specify the Edge Type name defined in Nebula Graph.
    name: follow
    type: {
      # Specify the data source file format to CSV.
      source: csv

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    # Specify the path to the CSV file.
    # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example: "hdfs://ip:port/xx/xx".
    # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example: "file:///tmp/xx.csv".
    path: "hdfs://192.168.*.*:9000/data/edge_follow.csv"

    # If the CSV file does not have a header, use [_c0, _c1, _c2, ..., _cn] to represent its header and indicate the columns as the source of the property values.
    # If the CSV file has headers, use the actual column names.
    fields: [_c2]

    # Specify the column names in the edge table in fields, and their corresponding values are specified as properties in the Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    nebula.fields: [degree]

    # Specify a column as the source for the source and destination vertexes.
    # The value of vertex must be the same as the column names in the above fields or csv.fields.
    # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
    source: {
      field: _c0
    }
    target: {
      field: _c1
    }

    # The delimiter specified. The default value is comma.
    separator: ",",

    # Specify a column as the source of the rank (optional).

    # ranking: rank

    # If the CSV file has a header, set the header to true.
    # If the CSV file does not have a header, set the header to false. The default value is false.
    header: false

    # The number of data written to Nebula Graph in a single batch.
    batch: 256

    # The number of Spark partitions.
    partition: 32
  }
]

```

```

}

# Set the information about the Edge Type serve.
{
  # Specify the Edge Type name defined in Nebula Graph.
  name: serve
  type: {
    # Specify the data source file format to CSV.
    source: csv

    # Specify how to import the data into Nebula Graph: Client or SST.
    sink: client
  }

  # Specify the path to the CSV file.
  # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example: "hdfs://ip:port/xx/xx".
  # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example: "file:///tmp/xx.csv".
  path: "hdfs://192.168.*.*:9000/data/edge_serve.csv"

  # If the CSV file does not have a header, use [_c0, _c1, _c2, ..., _cn] to represent its header and indicate the columns as the source of the property values.
  # If the CSV file has headers, use the actual column names.
  fields: [_c2,_c3]

  # Specify the column names in the edge table in fields, and their corresponding values are specified as properties in the Nebula Graph.
  # The sequence of fields and nebula.fields must correspond to each other.
  nebula.fields: [start_year, end_year]

  # Specify a column as the source for the source and destination vertexes.
  # The value of vertex must be the same as the column names in the above fields or csv.fields.
  # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
  source: {
    field: _c0
  }
  target: {
    field: _c1
  }

  # The delimiter specified. The default value is comma.
  separator: ",",

  # Specify a column as the source of the rank (optional).
  #ranking: _c5

  # If the CSV file has a header, set the header to true.
  # If the CSV file does not have a header, set the header to false. The default value is false.
  header: false

  # The number of data written to Nebula Graph in a single batch.
  batch: 256

  # The number of Spark partitions.
  partition: 32
}

]
# If more edges need to be added, refer to the previous configuration to add them.
}

```

STEP 4: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import CSV data into Nebula Graph. For descriptions of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <csv_application.conf_path>

```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar file directly](#).

For example:

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar
-c /root/nebula-exchange/nebula-exchange/target/classes/csv_application.conf

```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 5: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```

GO FROM "player100" OVER follow;

```

Users can also run the `SHOW STATS` command to view statistics.

STEP 6: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 14, 2022

16.4.2 Import data from JSON files

This topic provides an example of how to use Exchange to import Nebula Graph data stored in HDFS or local JSON files.

Data set

This topic takes the `basketballplayer` dataset as an example. Some sample data are as follows:

- player

```
{ "id": "player100", "age": 42, "name": "Tim Duncan" }
{ "id": "player101", "age": 36, "name": "Tony Parker" }
{ "id": "player102", "age": 33, "name": "LaMarcus Aldridge" }
{ "id": "player103", "age": 32, "name": "Rudy Gay" }
...
```

- team

```
{ "id": "team200", "name": "Warriors" }
{ "id": "team201", "name": "Nuggets" }
...
```

- follow

```
{ "src": "player100", "dst": "player101", "degree": 95 }
{ "src": "player101", "dst": "player102", "degree": 90 }
...
```

- serve

```
{ "src": "player100", "dst": "team204", "start_year": "1997", "end_year": "2016" }
{ "src": "player101", "dst": "team204", "start_year": "1999", "end_year": "2018" }
...
```

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been **installed** and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been **compiled**, or **download** the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- If files are stored in HDFS, ensure that the Hadoop service is running properly.
- If files are stored locally and Nebula Graph is a cluster architecture, you need to place the files in the same directory locally on each machine in the cluster.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: PROCESS JSON FILES

Confirm the following information:

1. Process JSON files to meet Schema requirements.
2. Obtain the JSON file storage path.

STEP 3: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set JSON data source configuration. In this example, the copied file is called `json_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 1G
    }
    executor: {
      memory: 1G
    }

    cores {
      max: 16
    }
  }

  # Nebula Graph configuration
  nebula: {
    address: {
      # Specify the IP addresses and ports for Graph and all Meta services.
      # If there are multiple addresses, the format is "ip1:port", "ip2:port", "ip3:port".
      # Addresses are separated by commas.
      graph: ["127.0.0.1:9669"]
      meta: ["127.0.0.1:9559"]
    }

    # The account entered must have write permission for the Nebula Graph space.
    user: root
    pswd: nebula

    # Fill in the name of the graph space you want to write data to in the Nebula Graph.
    space: basketballplayer
    connection {
      timeout: 3000
      retry: 3
    }
    execution {
      retry: 3
    }
    error: {
      max: 32
      output: /tmp/errors
    }
    rate: {
      limit: 1024
      timeout: 1000
    }
  }

  # Processing vertexes
  tags: [
    # Set the information about the Tag player.
    {
      # Specify the Tag name defined in Nebula Graph.
      name: player
      type: {
        # Specify the data source file format to JSON.
        source: json

        # Specify how to import the data into Nebula Graph: Client or SST.
        sink: client
      }

      # Specify the path to the JSON file.
      # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
      # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.json".
      path: "hdfs://192.168.*.:9000/data/vertex_player.json"

      # Specify the key name in the JSON file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula Graph.
      # If multiple column names need to be specified, separate them by commas.
      fields: [age, name]

      # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
      # The sequence of fields and nebula.fields must correspond to each other.
      nebula.fields: [age, name]

      # Specify a column of data in the table as the source of vertex VID in the Nebula Graph.
      # The value of vertex must be the same as that in the JSON file.
      # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
      vertex: {
        field: id
      }
    }
  ]
}
```

```

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}

# Set the information about the Tag Team.
{
  # Specify the Tag name defined in Nebula Graph.
  name: team
  type: {
    # Specify the data source file format to JSON.
    source: json

    # Specify how to import the data into Nebula Graph: Client or SST.
    sink: client
  }

  # Specify the path to the JSON file.
  # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
  # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.json".
  path: "hdfs://192.168.*.*:9000/data/vertex_team.json"

  # Specify the key name in the JSON file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula Graph.
  # If multiple column names need to be specified, separate them by commas.
  fields: [name]

  # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
  # The sequence of fields and nebula.fields must correspond to each other.
  nebula.fields: [name]

  # Specify a column of data in the table as the source of vertex VID in the Nebula Graph.
  # The value of vertex must be the same as that in the JSON file.
  # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
  vertex: {
    field: id
  }

  # The number of data written to Nebula Graph in a single batch.
  batch: 256

  # The number of Spark partitions.
  partition: 32
}

# If more vertexes need to be added, refer to the previous configuration to add them.
]
# Processing edges
edges: [
  # Set the information about the Edge Type follow.
  {
    # Specify the Edge Type name defined in Nebula Graph.
    name: follow
    type: {
      # Specify the data source file format to JSON.
      source: json

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    # Specify the path to the JSON file.
    # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
    # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.json".
    path: "hdfs://192.168.*.*:9000/data/edge_follow.json"

    # Specify the key name in the JSON file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula Graph.
    # If multiple column names need to be specified, separate them by commas.
    fields: [degree]

    # Specify the column names in the edge table in fields, and their corresponding values are specified as properties in the Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    nebula.fields: [degree]

    # Specify a column as the source for the source and destination vertexes.
    # The value of vertex must be the same as that in the JSON file.
    # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
    source: {
      field: src
    }
    target: {
      field: dst
    }

    # (Optional) Specify a column as the source of the rank.
    # ranking: rank

    # The number of data written to Nebula Graph in a single batch.
    batch: 256
  }
]

```

```

# The number of Spark partitions.
partition: 32
}

# Set the information about the Edge Type serve.
{
  # Specify the Edge type name defined in Nebula Graph.
  name: serve
  type: {
    # Specify the data source file format to JSON.
    source: json

    # Specify how to import the data into Nebula Graph: Client or SST.
    sink: client
  }

  # Specify the path to the JSON file.
  # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
  # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.json".
  path: "hdfs://192.168.*.*:9000/data/edge_serve.json"

  # Specify the key name in the JSON file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula Graph.
  # If multiple column names need to be specified, separate them by commas.
  fields: [start_year,end_year]

  # Specify the column names in the edge table in fields, and their corresponding values are specified as properties in the Nebula Graph.
  # The sequence of fields and nebula.fields must correspond to each other.
  nebula.fields: [start_year, end_year]

  # Specify a column as the source for the source and destination vertexes.
  # The value of vertex must be the same as that in the JSON file.
  # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
  source: {
    field: src
  }
  target: {
    field: dst
  }

  # (Optional) Specify a column as the source of the rank.
  #ranking: _c5

  # The number of data written to Nebula Graph in a single batch.
  batch: 256

  # The number of Spark partitions.
  partition: 32
}

]
# If more edges need to be added, refer to the previous configuration to add them.
}

```

STEP 4: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import JSON data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```
$ {SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <json_application.conf_path>
```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar](#) file directly.

For example:

```
$ {SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar -c /root/nebula-exchange/nebula-exchange/target/classes/json_application.conf
```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 5: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the `SHOW STATS` command to view statistics.

STEP 6: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.3 Import data from ORC files

This topic provides an example of how to use Exchange to import Nebula Graph data stored in HDFS or local ORC files.

To import a local ORC file to Nebula Graph, see [Nebula Importer](#).

Data set

This topic takes the [basketballplayer dataset](#) as an example.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been [installed](#) and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been [compiled](#), or [download](#) the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- If files are stored in HDFS, ensure that the Hadoop service is running properly.
- If files are stored locally and Nebula Graph is a cluster architecture, you need to place the files in the same directory locally on each machine in the cluster.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: PROCESS ORC FILES

Confirm the following information:

1. Process ORC files to meet Schema requirements.
2. Obtain the ORC file storage path.

STEP 3: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set ORC data source configuration. In this example, the copied file is called `orc_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 1G
    }
    executor: {
      memory: 1G
    }
    cores {
      max: 16
    }
  }

  # Nebula Graph configuration
  nebula: {
    address: {
      # Specify the IP addresses and ports for Graph and all Meta services.
```

```

# If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
# Addresses are separated by commas.
graph:["127.0.0.1:9669"]
meta:["127.0.0.1:9559"]
}

# The account entered must have write permission for the Nebula Graph space.
user: root
pswd: nebula

# Fill in the name of the graph space you want to write data to in the Nebula Graph.
space: basketballplayer
connection {
  timeout: 3000
  retry: 3
}
execution {
  retry: 3
}
error: {
  max: 32
  output: /tmp/errors
}
rate: {
  limit: 1024
  timeout: 1000
}
}

# Processing vertexes
tags: [
  # Set the information about the Tag player.
  {
    name: player
    type: {
      # Specify the data source file format to ORC.
      source: orc

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    # Specify the path to the ORC file.
    # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
    # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.orc".
    path: "hdfs://192.168.*.:9000/data/vertex_player.orc"

    # Specify the key name in the ORC file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula Graph.
    # If multiple values need to be specified, separate them with commas.
    fields: [age,name]

    # Specify the property names defined in Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    nebula.fields: [age, name]

    # Specify a column of data in the table as the source of VIDs in the Nebula Graph.
    # The value of vertex must be consistent with the field in the ORC file.
    # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
    vertex: {
      field:id
    }

    # The number of data written to Nebula Graph in a single batch.
    batch: 256

    # The number of Spark partitions.
    partition: 32
  }

  # Set the information about the Tag team.
  {
    # Specify the Tag name defined in Nebula Graph.
    name: team
    type: {
      # Specify the data source file format to ORC.
      source: orc

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    # Specify the path to the ORC file.
    # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
    # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.orc".
    path: "hdfs://192.168.*.:9000/data/vertex_team.orc"

    # Specify the key name in the ORC file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula Graph.
    # If multiple values need to be specified, separate them with commas.
    fields: [name]

    # Specify the property names defined in Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    nebula.fields: [name]
  }
]

```

```

# Specify a column of data in the table as the source of VIDs in the Nebula Graph.
# The value of vertex must be consistent with the field in the ORC file.
# Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
vertex: {
  field:id
}

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}

# If more vertexes need to be added, refer to the previous configuration to add them.
]
# Processing edges
edges: [
  # Set the information about the Edge Type follow.
  {
    # Specify the Edge Type name defined in Nebula Graph.
    name: follow
    type: {
      # Specify the data source file format to ORC.
      source: orc

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    # Specify the path to the ORC file.
    # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
    # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.orc".
    path: "hdfs://192.168.*.*:9000/data/edge_follow.orc"

    # Specify the key name in the ORC file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula Graph.
    # If multiple values need to be specified, separate them with commas.
    fields: [degree]

    # Specify the property names defined in Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    nebula.fields: [degree]

    # Specify a column as the source for the source and destination vertexes.
    # The value of vertex must be consistent with the field in the ORC file.
    # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
    source: {
      field: src
    }
    target: {
      field: dst
    }

    # (Optional) Specify a column as the source of the rank.
    #ranking: rank

    # The number of data written to Nebula Graph in a single batch.
    batch: 256

    # The number of Spark partitions.
    partition: 32
  }
]
# Set the information about the Edge type serve.
{
  # Specify the Edge type name defined in Nebula Graph.
  name: serve
  type: {
    # Specify the data source file format to ORC.
    source: orc

    # Specify how to import the data into Nebula Graph: Client or SST.
    sink: client
  }

  # Specify the path to the ORC file.
  # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
  # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.orc".
  path: "hdfs://192.168.*.*:9000/data/edge_serve.orc"

  # Specify the key name in the ORC file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula Graph.
  # If multiple values need to be specified, separate them with commas.
  fields: [start_year,end_year]

  # Specify the property names defined in Nebula Graph.
  # The sequence of fields and nebula.fields must correspond to each other.
  nebula.fields: [start_year, end_year]

  # Specify a column as the source for the source and destination vertexes.
  # The value of vertex must be consistent with the field in the ORC file.
  # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.

```



```

source: {
  field: src
}
target: {
  field: dst
}

# (Optional) Specify a column as the source of the rank.
#ranking: _c5

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}

# If more edges need to be added, refer to the previous configuration to add them.
}

```

STEP 4: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import ORC data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <orc_application.conf_path>

```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar](#) file directly.

For example:

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar
-c /root/nebula-exchange/nebula-exchange/target/classes/orc_application.conf

```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 5: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```

GO FROM "player100" OVER follow;

```

Users can also run the `SHOW STATS` command to view statistics.

STEP 6: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.4 Import data from Parquet files

This topic provides an example of how to use Exchange to import Nebula Graph data stored in HDFS or local Parquet files.

To import a local Parquet file to Nebula Graph, see [Nebula Importer](#).

Data set

This topic takes the [basketballplayer dataset](#) as an example.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been [installed](#) and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been [compiled](#), or [download](#) the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- If files are stored in HDFS, ensure that the Hadoop service is running properly.
- If files are stored locally and Nebula Graph is a cluster architecture, you need to place the files in the same directory locally on each machine in the cluster.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: PROCESS PARQUET FILES

Confirm the following information:

1. Process Parquet files to meet Schema requirements.
2. Obtain the Parquet file storage path.

STEP 3: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set Parquet data source configuration. In this example, the copied file is called `parquet_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 1G
    }
    executor: {
      memory: 1G
    }
  }

  cores {
    max: 16
  }
}

# Nebula Graph configuration
nebula: {
  address: {
    # Specify the IP addresses and ports for Graph and all Meta services.
```

```

# If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
# Addresses are separated by commas.
graph:["127.0.0.1:9669"]
meta:["127.0.0.1:9559"]
}

# The account entered must have write permission for the Nebula Graph space.
user: root
pswd: nebula

# Fill in the name of the graph space you want to write data to in the Nebula Graph.
space: basketballplayer
connection {
  timeout: 3000
  retry: 3
}
execution {
  retry: 3
}
error: {
  max: 32
  output: /tmp/errors
}
rate: {
  limit: 1024
  timeout: 1000
}
}

# Processing vertexes
tags: [
  # Set the information about the Tag player.
  {
    # Specify the Tag name defined in Nebula Graph.
    name: player
    type: {
      # Specify the data source file format to Parquet.
      source: parquet

      # Specifies how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    # Specify the path to the Parquet file.
    # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
    # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.parquet".
    path: "hdfs://192.168.*.13:9000/data/vertex_player.parquet"

    # Specify the key name in the Parquet file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula
    Graph.
    # If multiple values need to be specified, separate them with commas.
    fields: [age,name]

    # Specify the property name defined in Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    nebula.fields: [age, name]

    # Specify a column of data in the table as the source of VIDs in the Nebula Graph.
    # The value of vertex must be consistent with the field in the Parquet file.
    # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
    vertex: {
      field:id
    }

    # The number of data written to Nebula Graph in a single batch.
    batch: 256

    # The number of Spark partitions.
    partition: 32
  }
]

# Set the information about the Tag team.
{
  # Specify the Tag name defined in Nebula Graph.
  name: team
  type: {
    # Specify the data source file format to Parquet.
    source: parquet

    # Specifies how to import the data into Nebula Graph: Client or SST.
    sink: client
  }

  # Specify the path to the Parquet file.
  # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
  # If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.parquet".
  path: "hdfs://192.168.11.13:9000/data/vertex_team.parquet"

  # Specify the key name in the Parquet file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula
  Graph.
  # If multiple values need to be specified, separate them with commas.
  fields: [name]

  # Specify the property name defined in Nebula Graph.

```

```

# The sequence of fields and nebula.fields must correspond to each other.
nebula.fields: [name]

# Specify a column of data in the table as the source of VIDs in the Nebula Graph.
# The value of vertex must be consistent with the field in the Parquet file.
# Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
vertex: {
  field:id
}

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}

# If more vertexes need to be added, refer to the previous configuration to add them.
]
# Processing edges
edges: [
# Set the information about the Edge Type follow.
{
# Specify the Edge Type name defined in Nebula Graph.
name: follow
type: {
# Specify the data source file format to Parquet.
source: parquet

# Specifies how to import the data into Nebula Graph: Client or SST.
sink: client
}

# Specify the path to the Parquet file.
# If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
# If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.parquet".
path: "hdfs://192.168.11.13:9000/data/edge_follow.parquet"

# Specify the key name in the Parquet file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula
Graph.
# If multiple values need to be specified, separate them with commas.
fields: [degree]

# Specify the property name defined in Nebula Graph.
# The sequence of fields and nebula.fields must correspond to each other.
nebula.fields: [degree]

# Specify a column as the source for the source and destination vertexes.
# The values of vertex must be consistent with the fields in the Parquet file.
# Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
source: {
  field: src
}
target: {
  field: dst
}

# (Optional) Specify a column as the source of the rank.
#ranking: rank

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}

# Set the information about the Edge type serve.
{
# Specify the Edge type name defined in Nebula Graph.
name: serve
type: {
# Specify the data source file format to Parquet.
source: parquet

# Specifies how to import the data into Nebula Graph: Client or SST.
sink: client
}

# Specify the path to the Parquet file.
# If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx".
# If the file is stored locally, use double quotation marks to enclose the file path, starting with file://. For example, "file:///tmp/xx.parquet".
path: "hdfs://192.168.11.13:9000/data/edge_serve.parquet"

# Specify the key name in the Parquet file in fields, and its corresponding value will serve as the data source for the properties specified in the Nebula
Graph.
# If multiple values need to be specified, separate them with commas.
fields: [start_year,end_year]

# Specify the property name defined in Nebula Graph.
# The sequence of fields and nebula.fields must correspond to each other.
nebula.fields: [start_year, end_year]

```

```

# Specify a column as the source for the source and destination vertexes.
# The values of vertex must be consistent with the fields in the Parquet file.
# Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
source: {
  field: src
}
target: {
  field: dst
}

# (Optional) Specify a column as the source of the rank.
#ranking: _c5

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}

# If more edges need to be added, refer to the previous configuration to add them.
}

```

STEP 4: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import Parquet data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <parquet_application.conf_path>

```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar file](#) directly.

For example:

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar
-c /root/nebula-exchange/nebula-exchange/target/classes/parquet_application.conf

```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 5: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```

GO FROM "player100" OVER follow;

```

Users can also run the `SHOW STATS` command to view statistics.

STEP 6: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.5 Import data from HBase

This topic provides an example of how to use Exchange to import Nebula Graph data stored in HBase.

Data set

This topic takes the [basketballplayer dataset](#) as an example.

In this example, the data set has been stored in HBase. All vertexes and edges are stored in the `player`, `team`, `follow`, and `serve` tables. The following are some of the data for each table.

```
hbase(main):002:0> scan "player"
ROW
player100      column=cf:age, timestamp=1618881347530, value=42
player100      column=cf:name, timestamp=1618881354604, value=Tim Duncan
player101      column=cf:age, timestamp=1618881369124, value=36
player101      column=cf:name, timestamp=1618881379102, value=Tony Parker
player102      column=cf:age, timestamp=1618881386987, value=33
player102      column=cf:name, timestamp=1618881393370, value=LaMarcus Aldridge
player103      column=cf:age, timestamp=1618881402002, value=32
player103      column=cf:name, timestamp=1618881407882, value=Rudy Gay
...

hbase(main):003:0> scan "team"
ROW
team200        column=cf:name, timestamp=1618881445563, value=Warriors
team201        column=cf:name, timestamp=1618881453636, value=Nuggets
...

hbase(main):004:0> scan "follow"
ROW
player100      column=cf:degree, timestamp=1618881804853, value=95
player100      column=cf:dst_player, timestamp=1618881791522, value=player101
player101      column=cf:degree, timestamp=1618881824685, value=90
player101      column=cf:dst_player, timestamp=1618881816042, value=player102
...

hbase(main):005:0> scan "serve"
ROW
player100      column=cf:end_year, timestamp=1618881899333, value=2016
player100      column=cf:start_year, timestamp=1618881890117, value=1997
player100      column=cf:teamid, timestamp=1618881875739, value=team204
...
```

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- HBase: 2.2.7
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been **installed** and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been **compiled**, or **download** the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- The Hadoop service has been installed and started.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
(partition_num = 10, \
 replica_factor = 1, \
 vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set HBase data source configuration. In this example, the copied file is called `hbase_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
```



```

    cores: 1
    maxResultSize: 1G
  }
  cores {
    max: 16
  }
}

# Nebula Graph configuration
nebula: {
  address:{
    # Specify the IP addresses and ports for Graph and all Meta services.
    # If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
    # Addresses are separated by commas.
    graph:["127.0.0.1:9669"]
    meta:["127.0.0.1:9559"]
  }
  # The account entered must have write permission for the Nebula Graph space.
  user: root
  pswd: nebula
  # Fill in the name of the graph space you want to write data to in the Nebula Graph.
  space: basketballplayer
  connection {
    timeout: 3000
    retry: 3
  }
  execution {
    retry: 3
  }
  error: {
    max: 32
    output: /tmp/errors
  }
  rate: {
    limit: 1024
    timeout: 1000
  }
}
}

# Processing vertexes
tags: [
  # Set information about Tag player.
  # If you want to set RowKey as the data source, enter rowkey and the actual column name of the column family.
  {
    # The Tag name in Nebula Graph.
    name: player
    type: {
      # Specify the data source file format to HBase.
      source: hbase
      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }
    host:192.168.*.*
    port:2181
    table:"player"
    columnFamily:"cf"

    # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    # If multiple column names need to be specified, separate them by commas.
    fields: [age,name]
    nebula.fields: [age,name]

    # Specify a column of data in the table as the source of vertex VID in the Nebula Graph.
    # For example, if rowkey is the source of the VID, enter rowkey.
    vertex:{
      field:rowkey
    }
  }

  # Number of pieces of data written to Nebula Graph in a single batch.
  batch: 256

  # Number of Spark partitions
  partition: 32
}
# Set Tag Team information.
{
  name: team
  type: {
    source: hbase
    sink: client
  }
  host:192.168.*.*
  port:2181
  table:"team"
  columnFamily:"cf"
  fields: [name]
  nebula.fields: [name]
  vertex:{
    field:rowkey
  }
  batch: 256
  partition: 32
}

```

```

    }
  ]

  # Processing edges
  edges: [
    # Set the information about the Edge Type follow.
    {
      # The corresponding Edge Type name in Nebula Graph.
      name: follow

      type: {
        # Specify the data source file format to HBase.
        source: hbase

        # Specify how to import the Edge type data into Nebula Graph.
        # Specify how to import the data into Nebula Graph: Client or SST.
        sink: client
      }

      host:192.168.*.*
      port:2181
      table:"follow"
      columnFamily:"cf"

      # Specify the column names in the follow table in fields, and their corresponding values are specified as properties in the Nebula Graph.
      # The sequence of fields and nebula.fields must correspond to each other.
      # If multiple column names need to be specified, separate them by commas.
      fields: [degree]
      nebula.fields: [degree]

      # In source, use a column in the follow table as the source of the edge's source vertex.
      # In target, use a column in the follow table as the source of the edge's destination vertex.
      source:{
        field:rowkey
      }

      target:{
        field:dst_player
      }

      # (Optional) Specify a column as the source of the rank.
      #ranking: rank

      # The number of data written to Nebula Graph in a single batch.
      batch: 256

      # The number of Spark partitions.
      partition: 32
    }

    # Set the information about the Edge Type serve.
    {
      name: serve
      type: {
        source: hbase
        sink: client
      }
      host:192.168.*.*
      port:2181
      table:"serve"
      columnFamily:"cf"

      fields: [start_year,end_year]
      nebula.fields: [start_year,end_year]
      source:{
        field:rowkey
      }

      target:{
        field:teamid
      }

      # (Optional) Specify a column as the source of the rank.
      #ranking: rank

      batch: 256
      partition: 32
    }
  ]
}

```

STEP3: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import HBase data into Nebula Graph. For descriptions of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <hbase_application.conf_path>

```

Note

JAR packages are available in two ways: **compiled them yourself**, or **download the compiled .jar** file directly.

For example:

```
`${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar -c /root/nebula-exchange/nebula-exchange/target/classes/hbase_application.conf
```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 4: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the **SHOW STATS** command to view statistics.

STEP 5: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.6 Import data from MySQL/PostgreSQL

This topic provides an example of how to use Exchange to export MySQL data and import to Nebula Graph. It also applies to exporting data from PostgreSQL into Nebula Graph.

Data set

This topic takes the [basketballplayer dataset](#) as an example.

In this example, the data set has been stored in MySQL. All vertexes and edges are stored in the `player`, `team`, `follow`, and `serve` tables. The following are some of the data for each table.

```
mysql> desc player;
+-----+-----+-----+-----+-----+-----+
| Field | Type      | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| playerid | varchar(30) | YES  |     | NULL    |       |
| age      | int         | YES  |     | NULL    |       |
| name     | varchar(30) | YES  |     | NULL    |       |
+-----+-----+-----+-----+-----+-----+

mysql> desc team;
+-----+-----+-----+-----+-----+-----+
| Field | Type      | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| teamid | varchar(30) | YES  |     | NULL    |       |
| name   | varchar(30) | YES  |     | NULL    |       |
+-----+-----+-----+-----+-----+-----+

mysql> desc follow;
+-----+-----+-----+-----+-----+-----+
| Field      | Type      | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| src_player | varchar(30) | YES  |     | NULL    |       |
| dst_player | varchar(30) | YES  |     | NULL    |       |
| degree    | int         | YES  |     | NULL    |       |
+-----+-----+-----+-----+-----+-----+

mysql> desc serve;
+-----+-----+-----+-----+-----+-----+
| Field      | Type      | Null | Key | Default | Extra |
+-----+-----+-----+-----+-----+-----+
| playerid   | varchar(30) | YES  |     | NULL    |       |
| teamid     | varchar(30) | YES  |     | NULL    |       |
| start_year | int         | YES  |     | NULL    |       |
| end_year   | int         | YES  |     | NULL    |       |
+-----+-----+-----+-----+-----+-----+
```

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- MySQL: 8.0.23
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose.](#)

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been **installed** and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been **compiled**, or **download** the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- The Hadoop service has been installed and started.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set MySQL data source configuration. In this case, the copied file is called `mysql_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
  }
  driver: {
    cores: 1
    maxResultSize: 1G
  }
}
```

```

}
cores {
  max: 16
}
}

# Nebula Graph configuration
nebula: {
  address:{
    # Specify the IP addresses and ports for Graph and Meta services.
    # If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
    # Addresses are separated by commas.
    graph:["127.0.0.1:9669"]
    meta:["127.0.0.1:9559"]
  }
  # The account entered must have write permission for the Nebula Graph space.
  user: root
  pswd: nebula
  # Fill in the name of the graph space you want to write data to in the Nebula Graph.
  space: basketballplayer
  connection {
    timeout: 3000
    retry: 3
  }
  execution {
    retry: 3
  }
  error: {
    max: 32
    output: /tmp/errors
  }
  rate: {
    limit: 1024
    timeout: 1000
  }
}
}

# Processing vertexes
tags: [
  # Set the information about the Tag player.
  {
    # The Tag name in Nebula Graph.
    name: player
    type: {
      # Specify the data source file format to MySQL.
      source: mysql
      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    host:192.168.*.*
    port:3306
    database:"basketball"
    table:"player"
    user:"test"
    password:"123456"
    sentence:"select playerid, age, name from basketball.player order by playerid;"

    # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    # If multiple column names need to be specified, separate them by commas.
    fields: [age,name]
    nebula.fields: [age,name]

    # Specify a column of data in the table as the source of VIDs in the Nebula Graph.
    vertex: {
      field:playerid
    }

    # The number of data written to Nebula Graph in a single batch.
    batch: 256

    # The number of Spark partitions.
    partition: 32
  }
]

# Set the information about the Tag Team.
{
  name: team
  type: {
    source: mysql
    sink: client
  }

  host:192.168.*.*
  port:3306
  database:"basketball"
  table:"team"
  user:"test"
  password:"123456"
  sentence:"select teamid, name from basketball.team order by teamid;"

  fields: [name]
  nebula.fields: [name]
  vertex: {
    field: teamid
  }
}

```

```

    }
    batch: 256
    partition: 32
  }
]

# Processing edges
edges: [
  # Set the information about the Edge Type follow.
  {
    # The corresponding Edge Type name in Nebula Graph.
    name: follow

    type: {
      # Specify the data source file format to MySQL.
      source: mysql

      # Specify how to import the Edge type data into Nebula Graph.
      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    host: 192.168.*.*
    port: 3306
    database: "basketball"
    table: "follow"
    user: "test"
    password: "123456"
    sentence: "select src_player,dst_player,degree from basketball.follow order by src_player;"

    # Specify the column names in the follow table in fields, and their corresponding values are specified as properties in the Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    # If multiple column names need to be specified, separate them by commas.
    fields: [degree]
    nebula.fields: [degree]

    # In source, use a column in the follow table as the source of the edge's source vertex.
    # In target, use a column in the follow table as the source of the edge's destination vertex.
    source: {
      field: src_player
    }

    target: {
      field: dst_player
    }

    # (Optional) Specify a column as the source of the rank.
    # ranking: rank

    # The number of data written to Nebula Graph in a single batch.
    batch: 256

    # The number of Spark partitions.
    partition: 32
  }

  # Set the information about the Edge Type serve.
  {
    name: serve
    type: {
      source: mysql
      sink: client
    }

    host: 192.168.*.*
    port: 3306
    database: "basketball"
    table: "serve"
    user: "test"
    password: "123456"
    sentence: "select playerid,teamid,start_year,end_year from basketball.serve order by playerid;"
    fields: [start_year,end_year]
    nebula.fields: [start_year,end_year]
    source: {
      field: playerid
    }
    target: {
      field: teamid
    }
    batch: 256
    partition: 32
  }
]
}

```

STEP 3: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import MySQL data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```
`${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <mysql_application.conf_path>
```

Note

JAR packages are available in two ways: **compiled them yourself**, or **download the compiled** `.jar` file directly.

For example:

```
`${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar -c /root/nebula-exchange/nebula-exchange/target/classes/mysql_application.conf
```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 4: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the **SHOW STATS** command to view statistics.

STEP 5: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: February 16, 2022

16.4.7 Import data from ClickHouse

This topic provides an example of how to use Exchange to import data stored on ClickHouse into Nebula Graph.

Data set

This topic takes the `basketballplayer` dataset as an example.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- ClickHouse: docker deployment yandex/clickhouse-server tag: latest(2021.07.01)
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been `installed` and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been `compiled`, or `download` the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- The Hadoop service has been installed and started.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set ClickHouse data source configuration. In this example, the copied file is called `clickhouse_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 1G
    }
    cores {
      max: 16
    }
  }

  # Nebula Graph configuration
  nebula: {
    address:{
      # Specify the IP addresses and ports for Graph and Meta services.
      # If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
      # Addresses are separated by commas.
      graph:["127.0.0.1:9669"]
      meta:["127.0.0.1:9559"]
    }
    # The account entered must have write permission for the Nebula Graph space.
    user: root
    pswd: nebula
    # Fill in the name of the graph space you want to write data to in the Nebula Graph.
    space: basketballplayer
    connection {
      timeout: 3000
      retry: 3
    }
  }
}
```

```

    execution {
      retry: 3
    }
    error: {
      max: 32
      output: /tmp/errors
    }
    rate: {
      limit: 1024
      timeout: 1000
    }
  }
}
# Processing vertexes
tags: [
  # Set the information about the Tag player.
  {
    name: player
    type: {
      # Specify the data source file format to ClickHouse.
      source: clickhouse
      # Specify how to import the data of vertexes into Nebula Graph: Client or SST.
      sink: client
    }

    # JDBC URL of ClickHouse
    url:"jdbc:clickhouse://192.168.*.*:8123/basketballplayer"

    user:"user"
    password:"123456"

    # The number of ClickHouse partitions
    numPartition:"5"

    sentence:"select * from player"

    # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    # If multiple column names need to be specified, separate them by commas.
    fields: [name,age]
    nebula.fields: [name,age]

    # Specify a column of data in the table as the source of vertex VID in the Nebula Graph.
    vertex: {
      field:playerid
      # policy:hash
    }

    # The number of data written to Nebula Graph in a single batch.
    batch: 256

    # The number of Spark partitions.
    partition: 32
  }

  # Set the information about the Tag Team.
  {
    name: team
    type: {
      source: clickhouse
      sink: client
    }
    url:"jdbc:clickhouse://192.168.*.*:8123/basketballplayer"
    user:"user"
    password:"123456"
    numPartition:"5"
    sentence:"select * from team"
    fields: [name]
    nebula.fields: [name]
    vertex: {
      field:teamid
    }
    batch: 256
    partition: 32
  }
]

# Processing edges
edges: [
  # Set the information about the Edge Type follow.
  {
    # The corresponding Edge Type name in Nebula Graph.
    name: follow

    type: {
      # Specify the data source file format to ClickHouse.
      source: clickhouse

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }

    # JDBC URL of ClickHouse
    url:"jdbc:clickhouse://192.168.*.*:8123/basketballplayer"

```

```

user:"user"
password:"123456"

# The number of ClickHouse partitions.
numPartition:"5"

sentence:"select * from follow"

# Specify the column names in the follow table in fields, and their corresponding values are specified as properties in the Nebula Graph.
# The sequence of fields and nebula.fields must correspond to each other.
# If multiple column names need to be specified, separate them by commas.
fields: [degree]
nebula.fields: [degree]

# In source, use a column in the follow table as the source of the edge's source vertexes.
source: {
  field:src_player
}

# In target, use a column in the follow table as the source of the edge's destination vertexes.
target: {
  field:dst_player
}

# (Optional) Specify a column as the source of the rank.
#ranking: rank

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}

# Set the information about the Edge Type serve.
{
  name: serve
  type: {
    source: clickhouse
    sink: client
  }
  url:"jdbc:clickhouse://192.168.*.*:8123/basketballplayer"
  user:"user"
  password:"123456"
  numPartition:"5"
  sentence:"select * from serve"
  fields: [start_year,end_year]
  nebula.fields: [start_year,end_year]
  source: {
    field:playerid
  }
  target: {
    field:teamid
  }
}

# (Optional) Specify a column as the source of the rank.
#ranking: rank

batch: 256
partition: 32
}
}
}

```

STEP 3: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import ClickHouse data into Nebula Graph. For descriptions of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <clickhouse_application.conf_path>

```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar file directly](#).

For example:

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar
-c /root/nebula-exchange/nebula-exchange/target/classes/clickhouse_application.conf

```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 4: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the **SHOW STATS** command to view statistics.

STEP 5: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.8 Import data from Neo4j

This topic provides an example of how to use Exchange to import Nebula Graph data stored in Neo4j.

Implementation method


Exchange uses **Neo4j Driver 4.0.1** to read Neo4j data. Before batch export, you need to write Cypher statements that are automatically executed based on labels and relationship types and the number of Spark partitions in the configuration file to improve data export performance.

When Exchange reads Neo4j data, it needs to do the following:

1. The Reader in Exchange replaces the statement following the Cypher `RETURN` statement in the `exec` part of the configuration file with `COUNT(*)`, and executes this statement to get the total amount of data, then calculates the starting offset and size of each partition based on the number of Spark partitions.
2. (Optional) If the user has configured the `check_point_path` directory, Reader reads the files in the directory. In the transferring state, Reader calculates the offset and size that each Spark partition should have.
3. In each Spark partition, the Reader in Exchange adds different `SKIP` and `LIMIT` statements to the Cypher statement and calls the Neo4j Driver for parallel execution to distribute data to different Spark partitions.
4. The Reader finally processes the returned data into a DataFrame.

At this point, Exchange has finished exporting the Neo4j data. The data is then written in parallel to the Nebula Graph database.

The whole process is illustrated below.

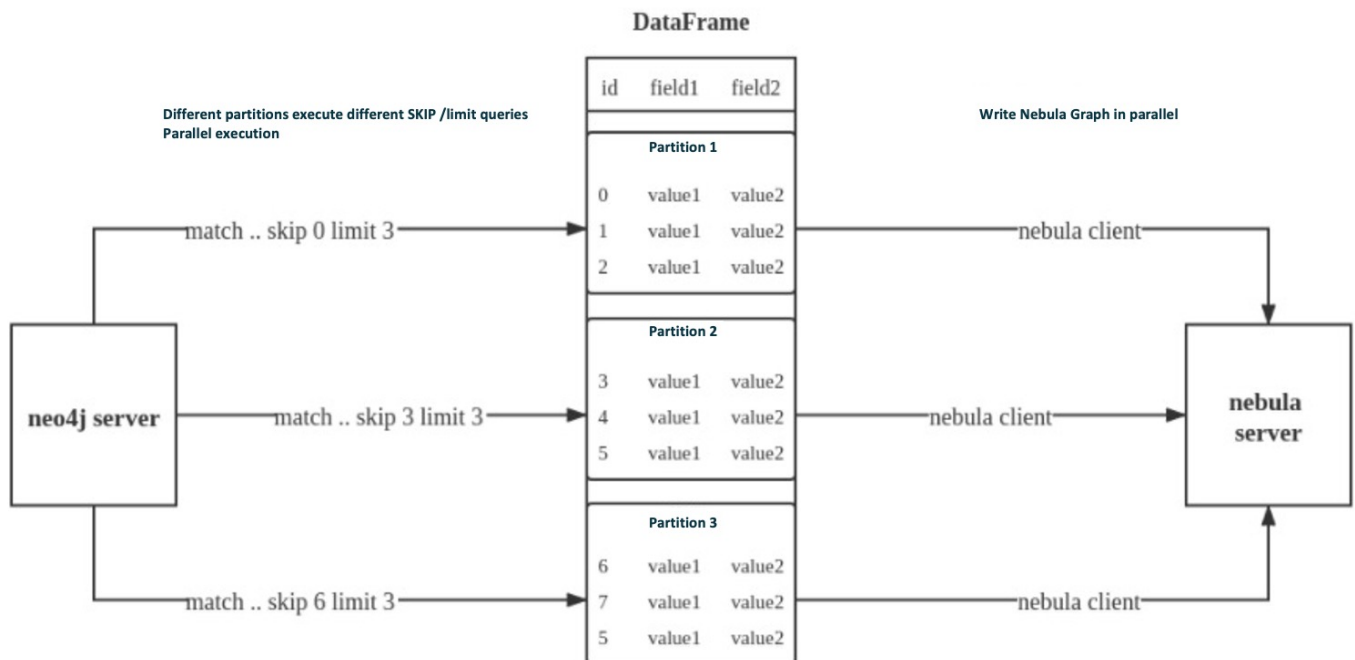

Data set

This topic takes the `basketballplayer` dataset as an example.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
- CPU cores: 14
- Memory: 251 GB
- Spark: Stand-alone, 2.4.6 pre-build for Hadoop 2.7
- Neo4j: 3.5.20 Community Edition
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been [installed](#) and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with Nebula Graph write permission.
- Exchange has been [compiled](#), or [download](#) the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer
nebula> USE basketballplayer;

## Create the Tag player
nebula> CREATE TAG player(name string, age int);

## Create the Tag team
nebula> CREATE TAG team(name string);

## Create the Edge type follow
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: CONFIGURING SOURCE DATA

To speed up the export of Neo4j data, create indexes for the corresponding properties in the Neo4j database. For more information, refer to the [Neo4j manual](#).

STEP 3: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set Neo4j data source configuration. In this example, the copied file is called `neo4j_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }

    driver: {
      cores: 1
      maxResultSize: 1G
    }

    executor: {
      memory: 1G
    }

    cores: {
      max: 16
    }
  }

  # Nebula Graph configuration
  nebula: {
    address: {
      graph: ["127.0.0.1:9669"]
      meta: ["127.0.0.1:9559"]
    }
  }
}
```



```

}
user: root
pswd: nebula
space: basketballplayer

connection {
  timeout: 3000
  retry: 3
}

execution {
  retry: 3
}

error: {
  max: 32
  output: /tmp/errors
}

rate: {
  limit: 1024
  timeout: 1000
}
}

# Processing vertexes
tags: [

# Set the information about the Tag player
{
  name: player
  type: {
    source: neo4j
    sink: client
  }
  server: "bolt://192.168.*.*:7687"
  user: neo4j
  password:neo4j
  database:neo4j
  exec: "match (n:player) return n.id as id, n.age as age, n.name as name"
  fields: [age,name]
  nebula.fields: [age,name]
  vertex: {
    field:id
  }
  partition: 10
  batch: 1000
  check_point_path: /tmp/test
}
# Set the information about the Tag Team
{
  name: team
  type: {
    source: neo4j
    sink: client
  }
  server: "bolt://192.168.*.*:7687"
  user: neo4j
  password:neo4j
  database:neo4j
  exec: "match (n:team) return n.id as id,n.name as name"
  fields: [name]
  nebula.fields: [name]
  vertex: {
    field:id
  }
  partition: 10
  batch: 1000
  check_point_path: /tmp/test
}
]

# Processing edges
edges: [
# Set the information about the Edge Type follow
{
  name: follow
  type: {
    source: neo4j
    sink: client
  }
  server: "bolt://192.168.*.*:7687"
  user: neo4j
  password:neo4j
  database:neo4j
  exec: "match (a:player)-[r:follow]->(b:player) return a.id as src, b.id as dst, r.degree as degree  order by id(r)"
  fields: [degree]
  nebula.fields: [degree]
  source: {
    field: src
  }
  target: {
    field: dst
  }
}
]

```

```

    }
    #ranking: rank
    partition: 10
    batch: 1000
    check_point_path: /tmp/test
  }
  # Set the information about the Edge Type serve
  {
    name: serve
    type: {
      source: neo4j
      sink: client
    }
    server: "bolt://192.168.*.*:7687"
    user: neo4j
    password: neo4j
    database: neo4j
    exec: "match (a:player)-[r:serve]->(b:team) return a.id as src, b.id as dst, r.start_year as start_year, r.end_year as end_year order by id(r)"
    fields: [start_year, end_year]
    nebula.fields: [start_year, end_year]
    source: {
      field: src
    }
    target: {
      field: dst
    }
    #ranking: rank
    partition: 10
    batch: 1000
    check_point_path: /tmp/test
  }
}
}

```

Exec configuration

When configuring either the `tags.exec` or `edges.exec` parameters, you need to fill in the Cypher query. To prevent loss of data during import, it is strongly recommended to include `ORDER BY` clause in Cypher queries. Meanwhile, in order to improve data import efficiency, it is better to select indexed properties for ordering. If there is no index, users can also observe the default order and select the appropriate properties for ordering to improve efficiency. If the pattern of the default order cannot be found, users can order them by the ID of the vertex or relationship and set the `partition` to a small value to reduce the ordering pressure of Neo4j.

Note

Using the `ORDER BY` clause lengthens the data import time.

Exchange needs to execute different `SKIP` and `LIMIT` Cypher statements on different Spark partitions, so `SKIP` and `LIMIT` clauses cannot be included in the Cypher statements corresponding to `tags.exec` and `edges.exec`.

tags.vertex or edges.vertex configuration

Nebula Graph uses ID as the unique primary key when creating vertexes and edges, overwriting the data in that primary key if it already exists. So, if a Neo4j property value is given as the Nebula Graph's ID and the value is duplicated in Neo4j, duplicate IDs will be generated. One and only one of their corresponding data will be stored in the Nebula Graph, and the others will be overwritten. Because the data import process is concurrently writing data to Nebula Graph, the final saved data is not guaranteed to be the latest data in Neo4j.

check_point_path configuration

If breakpoint transfers are enabled, to avoid data loss, the state of the database should not change between the breakpoint and the transfer. For example, data cannot be added or deleted, and the `partition` quantity configuration should not be changed.

STEP 4: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import Neo4j data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```
{SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <neo4j_application.conf_path>
```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar file directly](#).

For example:

```
{SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar -c /root/nebula-exchange/nebula-exchange/target/classes/neo4j_application.conf
```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 5: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the `SHOW STATS` command to view statistics.

STEP 6: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 14, 2022

16.4.9 Import data from Hive

This topic provides an example of how to use Exchange to import Nebula Graph data stored in Hive.

Data set

This topic takes the `basketballplayer` dataset as an example.

In this example, the data set has been stored in Hive. All vertexes and edges are stored in the `player`, `team`, `follow`, and `serve` tables. The following are some of the data for each table.

```
scala> spark.sql("describe basketball.player").show
+-----+-----+
|col_name|data_type|comment|
+-----+-----+
|playerid| string| null|
| age| bigint| null|
| name| string| null|
+-----+-----+

scala> spark.sql("describe basketball.team").show
+-----+-----+
| col_name|data_type|comment|
+-----+-----+
| teamid| string| null|
| name| string| null|
+-----+-----+

scala> spark.sql("describe basketball.follow").show
+-----+-----+
| col_name|data_type|comment|
+-----+-----+
|src_player| string| null|
|dst_player| string| null|
| degree| bigint| null|
+-----+-----+

scala> spark.sql("describe basketball.serve").show
+-----+-----+
| col_name|data_type|comment|
+-----+-----+
| playerid| string| null|
| teamid| string| null|
|start_year| bigint| null|
| end_year| bigint| null|
+-----+-----+
```

Note

The Hive data type `bigint` corresponds to the Nebula Graph `int`.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- Hive: 2.3.7, Hive Metastore database is MySQL 8.0.22
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been **installed** and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been **compiled**, or **download** the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- Hadoop has been installed and started, and the Hive Metastore database (MySQL in this example) has been started.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer
nebula> USE basketballplayer;

## Create the Tag player
nebula> CREATE TAG player(name string, age int);

## Create the Tag team
nebula> CREATE TAG team(name string);

## Create the Edge type follow
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: USE SPARK SQL TO CONFIRM HIVE SQL STATEMENTS

After the Spark-shell environment is started, run the following statements to ensure that Spark can read data in Hive.

```
scala> sql("select playerid, age, name from basketball.player").show
scala> sql("select teamid, name from basketball.team").show
scala> sql("select src_player, dst_player, degree from basketball.follow").show
scala> sql("select playerid, teamid, start_year, end_year from basketball.serve").show
```

The following is the result read from the table `basketball.player`.

```
+-----+-----+
| playerid| age|      name|
```

```
+-----+-----+
|player100| 42|      Tim Duncan|
|player101| 36|      Tony Parker|
|player102| 33|LaMarcus Aldridge|
|player103| 32|      Rudy Gay|
|player104| 32|      Marco Belinelli|
+-----+-----+
...
```

STEP 3: MODIFY CONFIGURATION FILE

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set Hive data source configuration. In this example, the copied file is called `hive_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 16
    }
    cores {
      max: 16
    }
  }
}

# If Spark and Hive are deployed in different clusters, you need to configure the parameters for connecting to Hive. Otherwise, skip these configurations.
#hive: {
#  waredir: "hdfs://NAMENODE_IP:9000/apps/ivr/hive-xxx/warehouse/"
#  connectionURL: "jdbc:mysql://your_ip:3306/hive_spark?characterEncoding=UTF-8"
#  connectionDriverName: "com.mysql.jdbc.Driver"
#  connectionUserName: "user"
#  connectionPassword: "password"
#}

# Nebula Graph configuration
nebula: {
  address:{
    # Specify the IP addresses and ports for Graph and all Meta services.
    # If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
    # Addresses are separated by commas.
    graph:["127.0.0.1:9669"]
    meta:["127.0.0.1:9559"]
  }
  # The account entered must have write permission for the Nebula Graph space.
  user: root
  pswd: nebula
  # Fill in the name of the graph space you want to write data to in the Nebula Graph.
  space: basketballplayer
  connection {
    timeout: 3000
    retry: 3
  }
  execution {
    retry: 3
  }
  error: {
    max: 32
    output: /tmp/errors
  }
  rate: {
    limit: 1024
    timeout: 1000
  }
}
# Processing vertexes
tags: [
  # Set the information about the Tag player.
  {
    # The Tag name in Nebula Graph.
    name: player
    type: {
      # Specify the data source file format to Hive.
      source: hive
      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }
  }

  # Set the SQL statement to read the data of player table in basketball database.
  exec: "select playerId, age, name from basketball.player"

  # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
  # The sequence of fields and nebula.fields must correspond to each other.
  # If multiple column names need to be specified, separate them by commas.
  fields: [age,name]
  nebula.fields: [age,name]
```

```

# Specify a column of data in the table as the source of vertex VID in the Nebula Graph.
vertex:{
  field:playerid
}

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}
# Set the information about the Tag Team.
{
  name: team
  type: {
    source: hive
    sink: client
  }
  exec: "select teamid, name from basketball.team"
  fields: [name]
  nebula.fields: [name]
  vertex: {
    field: teamid
  }
  batch: 256
  partition: 32
}
]

# Processing edges
edges: [
# Set the information about the Edge Type follow.
{
# The corresponding Edge Type name in Nebula Graph.
name: follow

type: {
# Specify the data source file format to Hive.
source: hive

# Specify how to import the Edge type data into Nebula Graph.
# Specify how to import the data into Nebula Graph: Client or SST.
sink: client
}

# Set the SQL statement to read the data of follow table in the basketball database.
exec: "select src_player, dst_player, degree from basketball.follow"

# Specify the column names in the follow table in Fields, and their corresponding values are specified as properties in the Nebula Graph.
# The sequence of fields and nebula.fields must correspond to each other.
# If multiple column names need to be specified, separate them by commas.
fields: [degree]
nebula.fields: [degree]

# In source, use a column in the follow table as the source of the edge's starting vertex.
# In target, use a column in the follow table as the source of the edge's destination vertex.
source: {
  field: src_player
}

target: {
  field: dst_player
}

# (Optional) Specify a column as the source of the rank.
#ranking: rank

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32
}

# Set the information about the Edge Type serve.
{
  name: serve
  type: {
    source: hive
    sink: client
  }
  exec: "select playerid, teamid, start_year, end_year from basketball.serve"
  fields: [start_year,end_year]
  nebula.fields: [start_year,end_year]
  source: {
    field: playerid
  }
  target: {
    field: teamid
  }
}

# (Optional) Specify a column as the source of the rank.
#ranking: rank

```

```

    batch: 256
    partition: 32
  }
]
}

```

STEP 4: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import Hive data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <hive_application.conf_path> -h

```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar file](#) directly.

For example:

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar
-c /root/nebula-exchange/nebula-exchange/target/classes/hive_application.conf -h

```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 5: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```

GO FROM "player100" OVER follow;

```

Users can also run the [SHOW STATS](#) command to view statistics.

STEP 6: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.10 Import data from MaxCompute

This topic provides an example of how to use Exchange to import Nebula Graph data stored in MaxCompute.

Data set

This topic takes the `basketballplayer` dataset as an example.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- MaxCompute: Alibaba Cloud official version
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been `installed` and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been `compiled`, or `download` the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- The Hadoop service has been installed and started.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set MaxCompute data source configuration. In this example, the copied file is called `maxcompute_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 1G
    }
    cores {
      max: 16
    }
  }

  # Nebula Graph configuration
  nebula: {
    address:{
      # Specify the IP addresses and ports for Graph and Meta services.
      # If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
      # Addresses are separated by commas.
      graph:["127.0.0.1:9669"]
      meta:["127.0.0.1:9559"]
    }
    # The account entered must have write permission for the Nebula Graph space.
    user: root
    pswd: nebula
    # Fill in the name of the graph space you want to write data to in the Nebula Graph.
    space: basketballplayer
    connection {
      timeout: 3000
      retry: 3
    }
  }
}
```

```

    execution {
        retry: 3
    }
    error: {
        max: 32
        output: /tmp/errors
    }
    rate: {
        limit: 1024
        timeout: 1000
    }
}
# Processing vertexes
tags: [
    # Set the information about the Tag player.
    {
        name: player
        type: {
            # Specify the data source file format to MaxCompute.
            source: maxcompute
            # Specify how to import the data into Nebula Graph: Client or SST.
            sink: client
        }

        # Table name of MaxCompute.
        table:player

        # Project name of MaxCompute.
        project:project

        # OdpsUrl and tunnelUrl for the MaxCompute service.
        # The address is https://help.aliyun.com/document_detail/34951.html.
        odpsUrl:"http://service.cn-hangzhou.maxcompute.aliyun.com/api"
        tunnelUrl:"http://dt.cn-hangzhou.maxcompute.aliyun.com"

        # AccessKeyId and accessKeySecret of the MaxCompute service.
        accessKeyId:xxx
        accessKeySecret:xxx

        # Partition description of the MaxCompute table. This configuration is optional.
        partitionSpec:"dt='partition1'"

        # Ensure that the table name in the SQL statement is the same as the value of the table above. This configuration is optional.
        sentence:"select id, name, age, playerid from player where id < 10"

        # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
        # The sequence of fields and nebula.fields must correspond to each other.
        # If multiple column names need to be specified, separate them by commas.
        fields:[name, age]
        nebula.fields:[name, age]

        # Specify a column of data in the table as the source of vertex VID in the Nebula Graph.
        vertex:{
            field: playerid
        }

        # The number of data written to Nebula Graph in a single batch.
        batch: 256

        # The number of Spark partitions.
        partition: 32
    }
]

# Set the information about the Tag Team.
{
    name: team
    type: {
        source: maxcompute
        sink: client
    }
    table:team
    project:project
    odpsUrl:"http://service.cn-hangzhou.maxcompute.aliyun.com/api"
    tunnelUrl:"http://dt.cn-hangzhou.maxcompute.aliyun.com"
    accessKeyId:xxx
    accessKeySecret:xxx
    partitionSpec:"dt='partition1'"
    sentence:"select id, name, teamid from team where id < 10"
    fields:[name]
    nebula.fields:[name]
    vertex:{
        field: teamid
    }
    batch: 256
    partition: 32
}
]

# Processing edges
edges: [
    # Set the information about the Edge Type follow.
    {
        # The corresponding Edge Type name in Nebula Graph.
        name: follow
    }
]

```

```

type:{
  # Specify the data source file format to MaxCompute.
  source:maxcompute

  # Specify how to import the Edge type data into Nebula Graph.
  # Specify how to import the data into Nebula Graph: Client or SST.
  sink:client
}

# Table name of MaxCompute.
table:follow

# Project name of MaxCompute.
project:project

# OddsUrl and tunnelUrl for MaxCompute service.
# The address is https://help.aliyun.com/document_detail/34951.html.
odpsUrl:"http://service.cn-hangzhou.maxcompute.aliyun.com/api"
tunnelUrl:"http://dt.cn-hangzhou.maxcompute.aliyun.com"

# AccessKeyId and accessKeySecret of the MaxCompute service.
accessKeyId:xxx
accessKeySecret:xxx

# Partition description of the MaxCompute table. This configuration is optional.
partitionSpec:"dt=partition1"

# Ensure that the table name in the SQL statement is the same as the value of the table above. This configuration is optional.
sentence:"select * from follow"

# Specify the column names in the follow table in Fields, and their corresponding values are specified as properties in the Nebula Graph.
# The sequence of fields and nebula.fields must correspond to each other.
# If multiple column names need to be specified, separate them by commas.
fields:[degree]
nebula.fields:[degree]

# In source, use a column in the follow table as the source of the edge's source vertex.
source:{
  field: src_player
}

# In target, use a column in the follow table as the source of the edge's destination vertex.
target:{
  field: dst_player
}

# (Optional) Specify a column as the source of the rank.
#ranking: rank

# The number of Spark partitions.
partition:10

# The number of data written to Nebula Graph in a single batch.
batch:10
}

# Set the information about the Edge Type serve.
{
  name: serve
  type:{
    source:maxcompute
    sink:client
  }
  table:serve
  project:project
  odpsUrl:"http://service.cn-hangzhou.maxcompute.aliyun.com/api"
  tunnelUrl:"http://dt.cn-hangzhou.maxcompute.aliyun.com"
  accessKeyId:xxx
  accessKeySecret:xxx
  partitionSpec:"dt=partition1"
  sentence:"select * from serve"
  fields:[start_year,end_year]
  nebula.fields:[start_year,end_year]
  source:{
    field: playerid
  }
  target:{
    field: teamid
  }
}

# (Optional) Specify a column as the source of the rank.
#ranking: rank

partition:10
batch:10
}
}
}

```

STEP 3: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import MaxCompute data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```
${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <maxcompute_application.conf_path>
```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar file](#) directly.

For example:

```
${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar -c /root/nebula-exchange/nebula-exchange/target/classes/maxcompute_application.conf
```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 4: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the `SHOW STATS` command to view statistics.

STEP 5: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.11 Import data from Pulsar

This topic provides an example of how to use Exchange to import Nebula Graph data stored in Pulsar.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been [installed](#) and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been [compiled](#), or [download](#) the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- The Pulsar service has been installed and started.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer
nebula> USE basketballplayer;

## Create the Tag player
nebula> CREATE TAG player(name string, age int);

## Create the Tag team
nebula> CREATE TAG team(name string);

## Create the Edge type follow
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set Pulsar data source configuration. In this example, the copied file is called `pulsar_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 1G
    }
    cores {
      max: 16
    }
  }

  # Nebula Graph configuration
  nebula: {
    address:{
      # Specify the IP addresses and ports for Graph and all Meta services.
      # If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
      # Addresses are separated by commas.
      graph:["127.0.0.1:9669"]
      meta:["127.0.0.1:9559"]
    }

    # The account entered must have write permission for the Nebula Graph space.
    user: root
    psd: nebula

    # Fill in the name of the graph space you want to write data to in the Nebula Graph.
    space: basketballplayer
    connection {
```

```

    timeout: 3000
    retry: 3
  }
  execution {
    retry: 3
  }
  error: {
    max: 32
    output: /tmp/errors
  }
  rate: {
    limit: 1024
    timeout: 1000
  }
}
# Processing vertices
tags: [
  # Set the information about the Tag player.
  {
    # The corresponding Tag name in Nebula Graph.
    name: player
    type: {
      # Specify the data source file format to Pulsar.
      source: pulsar
      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }
    # The address of the Pulsar server.
    service: "pulsar://127.0.0.1:6650"
    # admin.url of pulsar.
    admin: "http://127.0.0.1:8081"
    # The Pulsar option can be configured from topic, topics or topicsPattern.
    options: {
      topics: "topic1,topic2"
    }

    # Specify the column names in the player table in fields, and their corresponding values are specified as properties in the Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    # If multiple column names need to be specified, separate them by commas.
    fields: [age,name]
    nebula.fields: [age,name]

    # Specify a column of data in the table as the source of VIDs in the Nebula Graph.
    vertex:{
      field:playerid
    }

    # The number of data written to Nebula Graph in a single batch.
    batch: 10

    # The number of Spark partitions.
    partition: 10
    # The interval for message reading. Unit: second.
    interval.seconds: 10
  }
]
# Set the information about the Tag Team.
{
  name: team
  type: {
    source: pulsar
    sink: client
  }
  service: "pulsar://127.0.0.1:6650"
  admin: "http://127.0.0.1:8081"
  options: {
    topics: "topic1,topic2"
  }
  fields: [name]
  nebula.fields: [name]
  vertex:{
    field:teamid
  }
  batch: 10
  partition: 10
  interval.seconds: 10
}

]

# Processing edges
edges: [
  # Set the information about Edge Type follow
  {
    # The corresponding Edge Type name in Nebula Graph.
    name: follow

    type: {
      # Specify the data source file format to Pulsar.
      source: pulsar

      # Specify how to import the Edge type data into Nebula Graph.
      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }
  }
]

```



```

}

# The address of the Pulsar server.
service: "pulsar://127.0.0.1:6650"
# admin.url of pulsar.
admin: "http://127.0.0.1:8081"
# The Pulsar option can be configured from topic, topics or topicsPattern.
options: {
  topics: "topic1,topic2"
}

# Specify the column names in the follow table in fields, and their corresponding values are specified as properties in the Nebula Graph.
# The sequence of fields and nebula.fields must correspond to each other.
# If multiple column names need to be specified, separate them by commas.
fields: [degree]
nebula.fields: [degree]

# In source, use a column in the follow table as the source of the edge's source vertex.
# In target, use a column in the follow table as the source of the edge's destination vertex.
source:{
  field:src_player
}

target:{
  field:dst_player
}

# (Optional) Specify a column as the source of the rank.
#ranking: rank

# The number of data written to Nebula Graph in a single batch.
batch: 10

# The number of Spark partitions.
partition: 10

# The interval for message reading. Unit: second.
interval.seconds: 10
}

# Set the information about the Edge Type serve
{
  name: serve
  type: {
    source: Pulsar
    sink: client
  }
  service: "pulsar://127.0.0.1:6650"
  admin: "http://127.0.0.1:8081"
  options: {
    topics: "topic1,topic2"
  }

  fields: [start_year,end_year]
  nebula.fields: [start_year,end_year]
  source:{
    field:playerid
  }

  target:{
    field:teamid
  }

  # (Optional) Specify a column as the source of the rank.
  #ranking: rank

  batch: 10
  partition: 10
  interval.seconds: 10
}
}
}

```

STEP 3: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import Pulsar data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <pulsar_application.conf_path>

```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar file directly](#).

For example:

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar
-c /root/nebula-exchange/nebula-exchange/target/classes/pulsar_application.conf

```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 4: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the `SHOW STATS` command to view statistics.

STEP 5: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.12 Import data from Kafka

This topic provides a simple guide to importing Data stored on Kafka into Nebula Graph using Exchange.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Nebula Graph: 3.0.0. [Deploy Nebula Graph with Docker Compose](#).

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been [installed](#) and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- Exchange has been [compiled](#), or [download](#) the compiled `.jar` file directly.
- Spark has been installed.
- Learn about the Schema created in Nebula Graph, including names and properties of Tags and Edge types, and more.
- The Kafka service has been installed and started.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space.
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer.
nebula> USE basketballplayer;

## Create the Tag player.
nebula> CREATE TAG player(name string, age int);

## Create the Tag team.
nebula> CREATE TAG team(name string);

## Create the Edge type follow.
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve.
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: MODIFY CONFIGURATION FILES

Note

If some data is stored in Kafka's value field, you need to modify the source code, get the value from Kafka, parse the value through the `from_JSON` function, and return it as a Dataframe.

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set Kafka data source configuration. In this example, the copied file is called `kafka_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }
    driver: {
      cores: 1
      maxResultSize: 1G
    }
    cores {
      max: 16
    }
  }
}

# Nebula Graph configuration
nebula: {
  address:{
    # Specify the IP addresses and ports for Graph and all Meta services.
    # If there are multiple addresses, the format is "ip1:port","ip2:port","ip3:port".
    # Addresses are separated by commas.
    graph:["127.0.0.1:9669"]
    meta:["127.0.0.1:9559"]
  }
}
```

```

# The account entered must have write permission for the Nebula Graph space.
user: root
pswd: nebula
# Fill in the name of the graph space you want to write data to in the Nebula Graph.
space: basketballplayer
connection {
  timeout: 3000
  retry: 3
}
execution {
  retry: 3
}
error: {
  max: 32
  output: /tmp/errors
}
rate: {
  limit: 1024
  timeout: 1000
}
}
# Processing vertexes
tags: [
  # Set the information about the Tag player.
  {
    # The corresponding Tag name in Nebula Graph.
    name: player
    type: {
      # Specify the data source file format to Kafka.
      source: kafka
      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: client
    }
    # Kafka server address.
    service: "127.0.0.1:9092"
    # Message category.
    topic: "topic_name1"

    # Kafka data has a fixed domain name: key, value, topic, partition, offset, timestamp, timestampType.
    # If multiple fields need to be specified after Spark reads as DataFrame, separate them with commas.
    # Specify the field name in fields. For example, use key for name in Nebula and value for age in Nebula, as shown in the following.
    fields: [key,value]
    nebula.fields: [name,age]

    # Specify a column of data in the table as the source of vertex VID in the Nebula Graph.
    # The key is the same as the value above, indicating that key is used as both VID and property name.
    vertex:{
      field:key
    }

    # The number of data written to Nebula Graph in a single batch.
    batch: 10

    # The number of Spark partitions.
    partition: 10
    # The interval for message reading. Unit: second.
    interval.seconds: 10
  }
  # Set the information about the Tag Team.
  {
    name: team
    type: {
      source: kafka
      sink: client
    }
    service: "127.0.0.1:9092"
    topic: "topic_name2"
    fields: [key]
    nebula.fields: [name]
    vertex:{
      field:key
    }
    batch: 10
    partition: 10
    interval.seconds: 10
  }
]

# Processing edges
edges: [
  # Set the information about the Edge Type follow.
  {
    # The corresponding Edge Type name in Nebula Graph.
    name: follow

    type: {
      # Specify the data source file format to Kafka.
      source: kafka

      # Specify how to import the Edge type data into Nebula Graph.
      # Specify how to import the data into Nebula Graph: Client or SST.

```

```

    sink: client
  }

  # Kafka server address.
  service: "127.0.0.1:9092"
  # Message category.
  topic: "topic_name3"

  # Kafka data has a fixed domain name: key, value, topic, partition, offset, timestamp, timestampType.
  # If multiple fields need to be specified after Spark reads as DataFrame, separate them with commas.
  # Specify the field name in fields. For example, use key for degree in Nebula, as shown in the following.
  fields: [key]
  nebula.fields: [degree]

  # In source, use a column in the topic as the source of the edge's source vertex.
  # In target, use a column in the topic as the source of the edge's destination vertex.
  source:{
    field:timestamp
  }

  target:{
    field:offset
  }

  # (Optional) Specify a column as the source of the rank.
  #ranking: rank

  # The number of data written to Nebula Graph in a single batch.
  batch: 10

  # The number of Spark partitions.
  partition: 10

  # The interval for message reading. Unit: second.
  interval.seconds: 10
}

# Set the information about the Edge Type serve.
{
  name: serve
  type: {
    source: kafka
    sink: client
  }
  service: "127.0.0.1:9092"
  topic: "topic_name4"

  fields: [timestamp,offset]
  nebula.fields: [start_year,end_year]
  source:{
    field:key
  }

  target:{
    field:value
  }

  # (Optional) Specify a column as the source of the rank.
  #ranking: rank

  batch: 10
  partition: 10
  interval.seconds: 10
}
]
}

```

STEP 3: IMPORT DATA INTO NEBULA GRAPH

Run the following command to import Kafka data into Nebula Graph. For a description of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <kafka_application.conf_path>

```

Note

JAR packages are available in two ways: [compiled them yourself](#), or [download the compiled .jar](#) file directly.

For example:

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar
-c /root/nebula-exchange/nebula-exchange/target/classes/kafka_application.conf

```

You can search for `batchSuccess.<tag_name/edge_name>` in the command output to check the number of successes. For example, `batchSuccess.follow: 300`.

STEP 4: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the **SHOW STATS** command to view statistics.

STEP 5: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: January 18, 2022

16.4.13 Import data from SST files

This topic provides an example of how to generate the data from the data source into an SST (Sorted String Table) file and save it on HDFS, and then import it into Nebula Graph. The sample data source is a CSV file.

Precautions

- The SST file can be imported only in Linux.
- The default value of the property is not supported.

Background information

Exchange supports two data import modes:

- Import the data from the data source directly into Nebula Graph as **nGQL** statements.
- Generate the SST file from the data source, and use Console to import the SST file into Nebula Graph.

The following describes the scenarios, implementation methods, prerequisites, and steps for generating an SST file and importing data.

Scenarios

- Suitable for online services, because the generation almost does not affect services (just reads the Schema), and the import speed is fast.

Caution

Although the import speed is fast, write operations in the corresponding space are blocked during the import period (about 10 seconds). Therefore, you are advised to import data in off-peak hours.

- Suitable for scenarios with a large amount of data from data sources for its fast import speed.

Implementation methods

The underlying code in Nebula Graph uses RocksDB as the key-value storage engine. RocksDB is a storage engine based on the hard disk, providing a series of APIs for creating and importing SST files to help quickly import massive data.

The SST file is an internal file containing an arbitrarily long set of ordered key-value pairs for efficient storage of large amounts of key-value data. The entire process of generating SST files is mainly done by Exchange Reader, sstProcessor, and sstWriter. The whole data processing steps are as follows:

1. Reader reads data from the data source.
2. sstProcessor generates the SST file from the Nebula Graph's Schema information and uploads it to the HDFS. For details about the format of the SST file, see [Data Storage Format](#).
3. sstWriter opens a file and inserts data. When generating SST files, keys must be written in sequence.
4. After the SST file is generated, RocksDB imports the SST file into Nebula Graph using the `IngestExternalFile()` method. For example:

```
IngestExternalFileOptions ifo;
# Import two SST files
Status s = db->IngestExternalFile({"home/usr/file1.sst", "home/usr/file2.sst"}, ifo);
if (!s.ok()) {
    printf("Error while adding file %s and %s, Error %s\n",
        file_path1.c_str(), file_path2.c_str(), s.ToString().c_str());
    return 1;
}
```

When the `IngestExternalFile()` method is called, RocksDB copies the file to the data directory by default and blocks the RocksDB write operation. If the key range in the SST file overwrites the Memtable key range, flush the Memtable to the hard disk. After placing the SST file in an optimal location in the LSM tree, assign a global serial number to the file and turn on the write operation.

Data set

This topic takes the [basketballplayer dataset](#) as an example.

Environment

This example is done on MacOS. Here is the environment configuration information:

- Hardware specifications:
- CPU: 1.7 GHz Quad-Core Intel Core i7
- Memory: 16 GB
- Spark: 2.4.7, stand-alone
- Hadoop: 2.9.2, pseudo-distributed deployment
- Nebula Graph: 3.0.0.

Prerequisites

Before importing data, you need to confirm the following information:

- Nebula Graph has been **installed** and deployed with the following information:
- IP addresses and ports of Graph and Meta services.
- The user name and password with write permission to Nebula Graph.
- `--ws_storage_http_port` in the Meta service configuration file is the same as `--ws_http_port` in the Storage service configuration file. For example, `19779`.
- `--ws_meta_http_port` in the Graph service configuration file is the same as `--ws_http_port` in the Meta service configuration file. For example, `19559`.
- The information about the Schema, including names and properties of Tags and Edge types, and more.
- Exchange has been **compiled**, or **download** the compiled `.jar` file directly.
- Spark has been installed.
- JDK 1.8 or the later version has been installed and the environment variable `JAVA_HOME` has been configured.
- The Hadoop service has been installed and started.

Note

- To generate SST files of other data sources, see documents of the corresponding data source and check the prerequisites.
- To generate SST files only, users do not need to install the Hadoop service on the machine where the Storage service is deployed.
- To delete the SST file after the ingest (data import) operation, add the configuration `--move_files=true` to the Storage Service configuration file.

Steps

STEP 1: CREATE THE SCHEMA IN NEBULA GRAPH

Analyze the data to create a Schema in Nebula Graph by following these steps:

1. Identify the Schema elements. The Schema elements in the Nebula Graph are shown in the following table.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge Type	follow	degree int
Edge Type	serve	start_year int, end_year int

2. Create a graph space **basketballplayer** in the Nebula Graph and create a Schema as shown below.

```
## Create a graph space
nebula> CREATE SPACE basketballplayer \
    (partition_num = 10, \
    replica_factor = 1, \
    vid_type = FIXED_STRING(30));

## Use the graph space basketballplayer
nebula> USE basketballplayer;

## Create the Tag player
nebula> CREATE TAG player(name string, age int);

## Create the Tag team
nebula> CREATE TAG team(name string);

## Create the Edge type follow
nebula> CREATE EDGE follow(degree int);

## Create the Edge type serve
nebula> CREATE EDGE serve(start_year int, end_year int);
```

For more information, see [Quick start workflow](#).

STEP 2: PROCESS CSV FILES

Confirm the following information:

1. Process CSV files to meet Schema requirements.

Note

Exchange supports uploading CSV files with or without headers.

2. Obtain the CSV file storage path.

STEP 3: MODIFY CONFIGURATION FILES

After Exchange is compiled, copy the conf file `target/classes/application.conf` to set SST data source configuration. In this example, the copied file is called `sst_application.conf`. For details on each configuration item, see [Parameters in the configuration file](#).

```
{
  # Spark configuration
  spark: {
    app: {
      name: Nebula Exchange 3.0.0
    }

    master:local

    driver: {
      cores: 1
      maxResultSize: 1G
    }

    executor: {
      memory:1G
    }
  }
}
```

```

}

cores:{
  max: 16
}
}

# Nebula Graph configuration
nebula: {
  address:{
    graph:["127.0.0.1:9669"]
    meta:["127.0.0.1:9559"]
  }
  user: root
  pswd: nebula
  space: basketballplayer

# SST file configuration
path:{
  # The local directory that temporarily stores generated SST files
  local:"/tmp"

  # The path for storing the SST file in the HDFS
  remote:"/sst"

  # The NameNode address of HDFS
  hdfs.nameNode: "hdfs://*.*:9000"
}

# The connection parameters of clients
connection {
  # The timeout duration of socket connection and execution. Unit: milliseconds.
  timeout: 30000
}

error: {
  # The maximum number of failures that will exit the application.
  max: 32
  # Failed import jobs are logged in the output path.
  output: /tmp/errors
}

# Use Google's RateLimiter to limit requests to NebulaGraph.
rate: {
  # Steady throughput of RateLimiter.
  limit: 1024

  # Get the allowed timeout duration from RateLimiter. Unit: milliseconds.
  timeout: 1000
}
}

# Processing vertices
tags: [
  # Set the information about the Tag player.
  {
    # Specify the Tag name defined in Nebula Graph.
    name: player
    type: {
      # Specify the data source file format to CSV.
      source: csv

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: sst
    }
  }

  # Specify the path to the CSV file.
  # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx.csv".
  path: "hdfs://*.*:9000/dataset/vertex_player.csv"

  # If the CSV file does not have a header, use [_c0, _c1, _c2, ..., _cn] to represent its header and indicate the columns as the source of the property values.
  # If the CSV file has a header, use the actual column name.
  fields: [_c1, _c2]

  # Specify the property name defined in Nebula Graph.
  # The sequence of fields and nebula.fields must correspond to each other.
  nebula.fields: [age, name]

  # Specify a column of data in the table as the source of VIDs in Nebula Graph.
  # The value of vertex must be consistent with the column name in the above fields or csv.fields.
  # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
  vertex: {
    field:_c0
  }

  # The delimiter specified. The default value is comma.
  separator: ","

  # If the CSV file has a header, set the header to true.
  # If the CSV file does not have a header, set the header to false. The default value is false.
  header: false

  # The number of data written to Nebula Graph in a single batch.

```

```

batch: 256

# The number of Spark partitions.
partition: 32

# Whether to repartition data based on the number of partitions of graph spaces in Nebula Graph when generating the SST file.
repartitionWithNebula: false
}

# Set the information about the Tag Team.
{
  # Specify the Tag name defined in Nebula Graph.
  name: team
  type: {
    # Specify the data source file format to CSV.
    source: csv

    # Specify how to import the data into Nebula Graph: Client or SST.
    sink: sst
  }

  # Specify the path to the CSV file.
  # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx.csv".
  path: "hdfs://*.*.*:9000/dataset/vertex_team.csv"

  # If the CSV file does not have a header, use [_c0, _c1, _c2, ..., _cn] to represent its header and indicate the columns as the source of the property values.
  # If the CSV file has a header, use the actual column name.
  fields: [_c1]

  # Specify the property name defined in Nebula Graph.
  # The sequence of fields and nebula.fields must correspond to each other.
  nebula.fields: [name]

  # Specify a column of data in the table as the source of VIDs in Nebula Graph.
  # The value of vertex must be consistent with the column name in the above fields or csv.fields.
  # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
  vertex: {
    field: _c0
  }

  # The delimiter specified. The default value is comma.
  separator: ",",

  # If the CSV file has a header, set the header to true.
  # If the CSV file does not have a header, set the header to false. The default value is false.
  header: false

  # The number of data written to Nebula Graph in a single batch.
  batch: 256

  # The number of Spark partitions.
  partition: 32

  # Whether to repartition data based on the number of partitions of graph spaces in Nebula Graph when generating the SST file.
  repartitionWithNebula: false
}

# If more vertices need to be added, refer to the previous configuration to add them.
]
# Processing edges
edges: [
  # Set the information about the Edge Type follow.
  {
    # The Edge Type name defined in Nebula Graph.
    name: follow
    type: {
      # Specify the data source file format to CSV.
      source: csv

      # Specify how to import the data into Nebula Graph: Client or SST.
      sink: sst
    }

    # Specify the path to the CSV file.
    # If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx.csv".
    path: "hdfs://*.*.*:9000/dataset/edge_follow.csv"

    # If the CSV file does not have a header, use [_c0, _c1, _c2, ..., _cn] to represent its header and indicate the columns as the source of the property values.
    # If the CSV file has a header, use the actual column name.
    fields: [_c2]

    # Specify the property name defined in Nebula Graph.
    # The sequence of fields and nebula.fields must correspond to each other.
    nebula.fields: [degree]

    # Specify a column as the source for the source and destination vertices.
    # The value of vertex must be consistent with the column name in the above fields or csv.fields.
    # Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
    source: {
      field: _c0
    }
    target: {

```

```

    field: _c1
  }

  # The delimiter specified. The default value is comma.
  separator: ","

  # (Optional) Specify a column as the source of the rank.

  #ranking: rank

  # If the CSV file has a header, set the header to true.
  # If the CSV file does not have a header, set the header to false. The default value is false.
  header: false

  # The number of data written to Nebula Graph in a single batch.
  batch: 256

  # The number of Spark partitions.
  partition: 32

  # Whether to repartition data based on the number of partitions of graph spaces in Nebula Graph when generating the SST file.
  repartitionWithNebula: false
}

# Set the information about the Edge Type serve.
{
  # Specify the Edge type name defined in Nebula Graph.
  name: serve
  type: {
    # Specify the data source file format to CSV.
    source: csv

    # Specify how to import the data into Nebula Graph: Client or SST.
    sink: sst
  }
}

# Specify the path to the CSV file.
# If the file is stored in HDFS, use double quotation marks to enclose the file path, starting with hdfs://. For example, "hdfs://ip:port/xx/xx.csv".
path: "hdfs://*.*.*.*:9000/dataset/edge_serve.csv"

# If the CSV file does not have a header, use [_c0, _c1, _c2, ..., _cn] to represent its header and indicate the columns as the source of the property values.
# If the CSV file has a header, use the actual column name.
fields: [_c2, _c3]

# Specify the property name defined in Nebula Graph.
# The sequence of fields and nebula.fields must correspond to each other.
nebula.fields: [start_year, end_year]

# Specify a column as the source for the source and destination vertices.
# The value of vertex must be consistent with the column name in the above fields or csv.fields.
# Currently, Nebula Graph 3.0.0 supports only strings or integers of VID.
source: {
  field: _c0
}
target: {
  field: _c1
}

# The delimiter specified. The default value is comma.
separator: ","

# (Optional) Specify a column as the source of the rank.
#ranking: _c5

# If the CSV file has a header, set the header to true.
# If the CSV file does not have a header, set the header to false. The default value is false.
header: false

# The number of data written to Nebula Graph in a single batch.
batch: 256

# The number of Spark partitions.
partition: 32

# Whether to repartition data based on the number of partitions of graph spaces in Nebula Graph when generating the SST file.
repartitionWithNebula: false
}

# If more edges need to be added, refer to the previous configuration to add them.
}

```

STEP4: GENERATE THE SST FILE

Run the following command to generate the SST file from the CSV source file. For a description of the parameters, see [Options for import](#).

```

${SPARK_HOME}/bin/spark-submit --master "local" --conf spark.sql.shuffle.partition=<shuffle_concurrency> --class com.vesoft.nebula.exchange.Exchange <nebula-exchange-3.0.0.jar_path> -c <sst_application.conf_path>

```

Note

When generating SST files, the shuffle operation of Spark will be involved. Note that the configuration of `spark.sql.shuffle.partition` should be added when you submit the command.

Note

JAR packages are available in two ways: **compiled them yourself**, or **download the compiled .jar file** directly.

For example:

```
${SPARK_HOME}/bin/spark-submit --master "local" --conf spark.sql.shuffle.partition=200 --class com.vesoft.nebula.exchange.Exchange /root/nebula-exchange/nebula-exchange/target/nebula-exchange-3.0.0.jar -c /root/nebula-exchange/nebula-exchange/target/classes/sst_application.conf
```

After the task is complete, you can view the generated SST file in the `/sst` directory (specified by the `nebula.path.remote` parameter) on HDFS.

Note

If you modify the Schema, such as rebuilding the graph space, modifying the Tag, or modifying the Edge type, you need to regenerate the SST file because the SST file verifies the space ID, Tag ID, and Edge ID.

STEP 5: IMPORT THE SST FILE

Note

Confirm the following information before importing:

- Confirm that the Hadoop service has been deployed on all the machines where the Storage service is deployed, and configure `HADOOP_HOME` and `JAVA_HOME`.
- The `--ws_storage_http_port` in the Meta service configuration file (add it manually if it does not exist) is the same as the `--ws_http_port` in the Storage service configuration file. For example, both are `19779`.
- The `--ws_meta_http_port` in the Graph service configuration file (add it manually if it does not exist) is the same as the `--ws_http_port` in the Meta service configuration file. For example, both are `19559`.

Connect to the Nebula Graph database using the client tool and import the SST file as follows:

1. Run the following command to select the graph space you created earlier.

```
nebula> USE basketballplayer;
```

2. Run the following command to download the SST file:

```
nebula> DOWNLOAD HDFS "hdfs://<hadoop_address>:<hadoop_port>/<sst_file_path>";
```

For example:

```
nebula> DOWNLOAD HDFS "hdfs://*.*.*:9000/sst";
```

3. Run the following command to import the SST file:

```
nebula> INGEST;
```

Note

- To download the SST file again, delete the `download` folder in the space ID in the `data/storage/nebula` directory in the Nebula Graph installation path, and then download the SST file again. If the space has multiple copies, the `download` folder needs to be deleted on all machines where the copies are saved.
- If there is a problem with the import and re-importing is required, re-execute `INGEST;` .

STEP 6: (OPTIONAL) VALIDATE DATA

Users can verify that data has been imported by executing a query in the Nebula Graph client (for example, Nebula Graph Studio). For example:

```
GO FROM "player100" OVER follow;
```

Users can also run the `SHOW STATS` command to view statistics.

STEP 7: (OPTIONAL) REBUILD INDEXES IN NEBULA GRAPH

With the data imported, users can recreate and rebuild indexes in Nebula Graph. For details, see [Index overview](#).

Last update: February 15, 2022

16.4.14 Export data from Nebula Graph

This topic uses an example to illustrate how to use Exchange to export data from Nebula Graph to a CSV file.

Enterpriseonly

Only Exchange Enterprise Edition supports exporting data from Nebula Graph to a CSV file.

Note

SSL encryption is not supported when exporting data from Nebula Graph.

Preparation

This example is completed on a virtual machine equipped with Linux. The hardware and software you need to prepare before exporting data are as follows.

HARDWARE

Type	Information
CPU	4 Intel(R) Xeon(R) Platinum 8260 CPU @ 2.30GHz
Memory	16G
Hard disk	50G

SYSTEM

CentOS 7.9.2009

SOFTWARE

Name	Version
JDK	1.8.0
Hadoop	2.10.1
Scala	2.12.11
Spark	2.4.7
Nebula Graph	3.0.0

DATASET

As the data source, Nebula Graph stores the **basketballplayer** dataset in this example, the Schema elements of which are shown as follows.

Element	Name	Property
Tag	player	name string, age int
Tag	team	name string
Edge type	follow	degree int
Edge type	serve	start_year int, end_year int

Steps

1. Get the JAR file of Exchange Enterprise Edition from the **Nebula Graph Enterprise Edition Package**.

2. Modify the configuration file.

Exchange Enterprise Edition provides the configuration template `export_application.conf` for exporting Nebula Graph data. For details, see [Exchange parameters](#). The core content of the configuration file used in this example is as follows:

```
...
# Processing tags
# There are tag config examples for different dataSources.
tags: [
  # export NebulaGraph tag data to csv, only support export to CSV for now.
  {
    name: player
    type: {
      source: Nebula
      sink: CSV
    }
    # the path to save the NebulaGraph data, make sure the path doesn't exist.
    path:"hdfs://192.168.8.177:9000/vertex/player"
    # if no need to export any properties when export NebulaGraph tag data
    # if noField is configured true, just export vertexId
    noField:false
    # define properties to export from NebulaGraph tag data
    # if return.fields is configured as empty list, then export all properties
    return.fields:[]
    # nebula space partition number
    partition:10
  }
]

...

# Processing edges
# There are edge config examples for different dataSources.
edges: [
  # export NebulaGraph tag data to csv, only support export to CSV for now.
  {
    name: follow
    type: {
      source: Nebula
      sink: CSV
    }
    # the path to save the NebulaGraph data, make sure the path doesn't exist.
    path:"hdfs://192.168.8.177:9000/edge/follow"
    # if no need to export any properties when export NebulaGraph edge data
    # if noField is configured true, just export src,dst,rank
    noField:false
    # define properties to export from NebulaGraph edge data
    # if return.fields is configured as empty list, then export all properties
    return.fields:[]
    # nebula space partition number
    partition:10
  }
]

...

}
```

3. Export data from Nebula Graph with the following command.

```
<spark_install_path>/bin/spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange nebula-exchange-x.y.z.jar_path> -c <export_application.conf_path>
```

The command used in this example is as follows.

```
$ ./spark-submit --master "local" --class com.vesoft.nebula.exchange.Exchange \
~/exchange-ent/nebula-exchange-ent-3.0.0.jar -c ~/exchange-ent/export_application.conf
```

4. Check the exported data.
 - a. Check whether the CSV file is successfully generated under the target path.

```
$ hadoop fs -ls /vertex/player
Found 11 items
-rw-r--r--  3 nebula supergroup      0 2021-11-05 07:36 /vertex/player/_SUCCESS
-rw-r--r--  3 nebula supergroup    160 2021-11-05 07:36 /vertex/player/part-00000-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    163 2021-11-05 07:36 /vertex/player/part-00001-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    172 2021-11-05 07:36 /vertex/player/part-00002-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    172 2021-11-05 07:36 /vertex/player/part-00003-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    144 2021-11-05 07:36 /vertex/player/part-00004-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    173 2021-11-05 07:36 /vertex/player/part-00005-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    160 2021-11-05 07:36 /vertex/player/part-00006-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    148 2021-11-05 07:36 /vertex/player/part-00007-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    125 2021-11-05 07:36 /vertex/player/part-00008-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
-rw-r--r--  3 nebula supergroup    119 2021-11-05 07:36 /vertex/player/part-00009-17293020-ba2e-4243-b834-34495c0536b3-c000.csv
```

- b. Check the contents of the CSV file to ensure that the data export is successful.

Last update: January 14, 2022

16.5 Exchange FAQ

16.5.1 Compilation

Q: Some packages not in central repository failed to download, error: Could not resolve dependencies for project xxx

Please check the `mirror` part of Maven installation directory `libexec/conf/settings.xml`:

```
<mirror>
  <id>alimaven</id>
  <mirrorOf>central</mirrorOf>
  <name>aliyun maven</name>
  <url>http://maven.aliyun.com/nexus/content/repositories/central</url>
</mirror>
```

Check whether the value of `mirrorOf` is configured to `*`. If it is, change it to `central` or `*`, `!SparkPackagesRepo`, `!bintray-streamnative-maven`.

Reason: There are two dependency packages in Exchange's `pom.xml` that are not in Maven's central repository. `pom.xml` configures the repository address for these two dependencies. If the `mirrorOf` value for the mirror address configured in Maven is `*`, all dependencies will be downloaded from the Central repository, causing the download to fail.

Q: Unable to download SNAPSHOT packages when compiling Exchange

Problem description: The system reports `Could not find artifact com.vesoft.client:jar:xxx-SNAPSHOT` when compiling.

Cause: There is no local Maven repository for storing or downloading SNAPSHOT packages. The default central repository in Maven only stores official releases, not development versions (SNAPSHOT).

Solution: Add the following configuration in the `profiles` scope of Maven's `setting.xml` file:

```
<profile>
  <activation>
    <activeByDefault>true</activeByDefault>
  </activation>
  <repositories>
    <repository>
      <id>snapshots</id>
      <url>https://oss.sonatype.org/content/repositories/snapshots</url>
      <snapshots>
        <enabled>true</enabled>
      </snapshots>
    </repository>
  </repositories>
</profile>
```

16.5.2 Execution

Q: How to submit in Yarn-Cluster mode?

To submit a task in Yarn-Cluster mode, run the following command:

```
$SPARK_HOME/bin/spark-submit --class com.vesoft.nebula.exchange.Exchange \
--master yarn-cluster \
--files application.conf \
--conf spark.driver.extraClassPath=./ \
--conf spark.executor.extraClassPath=./ \
nebula-exchange-3.0.0.jar \
-c application.conf
```

Q: Error: method name xxx not found

Generally, the port configuration is incorrect. Check the port configuration of the Meta service, Graph service, and Storage service.

Q: Error: NoSuchMethod, MethodNotFound (Exception in thread "main" java.lang.NoSuchMethodError , etc)

Most errors are caused by JAR package conflicts or version conflicts. Check whether the version of the error reporting service is the same as that used in Exchange, especially Spark, Scala, and Hive.

Q: When Exchange imports Hive data, error: Exception in thread "main" org.apache.spark.sql.AnalysisException: Table or view not found

Check whether the `-h` parameter is omitted in the command for submitting the Exchange task and whether the table and database are correct, and run the user-configured exec statement in spark-SQL to verify the correctness of the exec statement.

Q: Run error: com.facebook.thrift.protocol.TProtocolException: Expected protocol id xxx

Check that the Nebula Graph service port is configured correctly.

- For source, RPM, or DEB installations, configure the port number corresponding to `--port` in the configuration file for each service.
- For docker installation, configure the docker mapped port number as follows:

Execute `docker-compose ps` in the `nebula-docker-compose` directory, for example:

\$ docker-compose ps				
Name	Command	State	Ports	
nebula-docker-compose_graphd_1	/usr/local/nebula/bin/nebu ...	Up (healthy)	0.0.0.0:33205->19669/tcp, 0.0.0.0:33204->19670/tcp, 0.0.0.0:9669->9669/tcp	
nebula-docker-compose_metad_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:33165->19559/tcp, 0.0.0.0:33162->19560/tcp, 0.0.0.0:33167->9559/tcp, 9560/tcp	
nebula-docker-compose_metad1_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:33166->19559/tcp, 0.0.0.0:33163->19560/tcp, 0.0.0.0:33168->9559/tcp, 9560/tcp	
nebula-docker-compose_metad2_1	./bin/nebula-metad --flagf ...	Up (healthy)	0.0.0.0:33161->19559/tcp, 0.0.0.0:33160->19560/tcp, 0.0.0.0:33164->9559/tcp, 9560/tcp	
nebula-docker-compose_storaged_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:33180->19779/tcp, 0.0.0.0:33178->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:33183->9779/tcp, 9780/tcp	
nebula-docker-compose_storaged1_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:33175->19779/tcp, 0.0.0.0:33172->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:33177->9779/tcp, 9780/tcp	
nebula-docker-compose_storaged2_1	./bin/nebula-storaged --fl ...	Up (healthy)	0.0.0.0:33184->19779/tcp, 0.0.0.0:33181->19780/tcp, 9777/tcp, 9778/tcp, 0.0.0.0:33185->9779/tcp, 9780/tcp	

Check the `Ports` column to find the docker mapped port number, for example:

- The port number available for Graph service is 9669.
- The port number for Meta service are 33167, 33168, 33164.
- The port number for Storage service are 33183, 33177, 33185.

Q: Error:

Exception in thread "main" com.facebook.thrift.protocol.TProtocolException: The field 'code' has been assigned the invalid value -4

Check whether the version of Exchange is the same as that of Nebula Graph. For more information, see [Limitations](#).

Q: How to correct the messy code when importing Hive data into Nebula Graph?

It may happen if the property value of the data in Hive contains Chinese characters. The solution is to add the following options before the JAR package path in the import command:

```
--conf spark.driver.extraJavaOptions=-Dfile.encoding=utf-8
--conf spark.executor.extraJavaOptions=-Dfile.encoding=utf-8
```

Namely:

```
<spark_install_path>/bin/spark-submit --master "local" \
--conf spark.driver.extraJavaOptions=-Dfile.encoding=utf-8 \
--conf spark.executor.extraJavaOptions=-Dfile.encoding=utf-8 \
--class com.vesoft.nebula.exchange.Exchange \
<nebula-exchange-3.x.y.jar_path> -c <application.conf_path>
```

In YARN, use the following command:

```
<spark_install_path>/bin/spark-submit \
--class com.vesoft.nebula.exchange.Exchange \
--master yarn-cluster \
--files <application.conf_path> \
--conf spark.driver.extraClassPath=./ \
--conf spark.executor.extraClassPath=./ \
--conf spark.driver.extraJavaOptions=-Dfile.encoding=utf-8 \
--conf spark.executor.extraJavaOptions=-Dfile.encoding=utf-8 \
<nebula-exchange-3.x.y.jar_path> \
-c application.conf
```

Q: org.rocksdb.RocksDBException: While open a file for appending: /path/sst/1-xxx.sst: No such file or directory

Solution:

1. Check if `/path` exists. If not, or if the path is set incorrectly, create or correct it.
2. Check if Spark's current user on each machine has the operation permission on `/path`. If not, grant the permission.

16.5.3 Configuration

Q: Which configuration fields will affect import performance?

- batch: The number of data contained in each nGQL statement sent to the Nebula Graph service.
- partition: The number of Spark data partitions, indicating the number of concurrent data imports.
- nebula.rate: Get a token from the token bucket before sending a request to Nebula Graph.
 - limit: Represents the size of the token bucket.
 - timeout: Represents the timeout period for obtaining the token.

The values of these four parameters can be adjusted appropriately according to the machine performance. If the leader of the Storage service changes during the import process, you can adjust the values of these four parameters to reduce the import speed.

16.5.4 Others

Q: Which versions of Nebula Graph are supported by Exchange?

See [Limitations](#).

Q: What is the relationship between Exchange and Spark Writer?

Exchange is the Spark application developed based on Spark Writer. Both are suitable for bulk migration of cluster data to Nebula Graph in a distributed environment, but later maintenance work will be focused on Exchange. Compared with Spark Writer, Exchange has the following improvements:

- It supports more abundant data sources, such as MySQL, Neo4j, Hive, HBase, Kafka, Pulsar, etc.
- It fixed some problems of Spark Writer. For example, when Spark reads data from HDFS, the default source data is String, which may be different from the Nebula Graph's Schema. So Exchange adds automatic data type matching and type conversion. When the data type in the Nebula Graph's Schema is non-String (e.g. double), Exchange converts the source data of String type to the corresponding type.

Last update: February 15, 2022

17. Nebula Algorithm

Nebula Algorithm (Algorithm) is a Spark application based on **GraphX**. It uses a complete algorithm tool to perform graph computing on the data in the Nebula Graph database by submitting a Spark task. You can also programmatically use the algorithm under the lib repository to perform graph computing on DataFrame.

17.1 Version compatibility

The correspondence between the Nebula Algorithm release and the Nebula Graph core release is as follows.

Algorithm client	Nebula Graph
3.0-SNAPSHOT	nightly
3.0.0	3.0.0
2.6.x	2.6.x
2.5.0	2.5.0~2.5.1
2.1.0	2.0.0~2.0.1

17.2 Prerequisites

Before using the Nebula Algorithm, users need to confirm the following information:

- The Nebula Graph services have been deployed and started. For details, see [Nebula Installation](#).
- The Spark version is 2.4.x.
- The Scala version is 2.11.
- (Optional) If users need to clone, compile, and package the latest Algorithm in Github, install [Maven](#).

17.3 Limitations

- When submitting the algorithm package directly, the data of the vertex ID must be an integer. That is, the vertex ID can be INT or String, but the data itself is an integer.
- For non-integer String data, it is recommended to use the algorithm interface. You can use the `dense_rank` function of SparkSQL to encode the data as the Long type instead of the String type.
- Graph computing outputs vertex datasets, and the algorithm results are stored in DataFrames as the properties of vertices. You can do further operations such as statistics and filtering according to your business requirements.
- When writing the algorithm results into the Nebula Graph, make sure that the Tag in the corresponding graph space has properties corresponding to the algorithm result name. The corresponding properties of each algorithm are as follows.

Algorithm	Properties name	Properties type
pagerank	pagerank	double/string
louvain	louvain	int/string
kcore	kcore	int/string
labelpropagation	lpa	int/string
connectedcomponent	cc	int/string
stronglyconnectedcomponent	scc	int/string
betweenness	betweenness	double/string
shortestpath	shortestpath	string
degreestatic	degree,inDegree,outDegree	int/string
trianglecount	trianglecount	int/string
clusteringcoefficient	clustercoefficient	double/string
closeness	closeness	double/string
hanp	hanp	int/string
bfs	bfs	string
jaccard	jaccard	string
node2vec	node2vec	string

17.4 Supported algorithms

The graph computing algorithms supported by Nebula Algorithm are as follows.

Algorithm	Description	Scenario
PageRank	The rank of pages	Web page ranking, key node mining
Louvain	Community discovery	Community mining, hierarchical clustering
KCore	K core	Community discovery, financial risk control
LabelPropagation	Label propagation	Information spreading, advertising, and community discovery
Hanp	Label propagation advanced	Community discovery, recommendation system
ConnectedComponent	Connected component	Community discovery, island discovery
StronglyConnectedComponent	Strongly connected component	Community discovery
ShortestPath	The shortest path	Path planning, network planning
TriangleCount	Triangle counting	Network structure analysis
GraphTriangleCount	Graph triangle counting	Network structure and tightness analysis
BetweennessCentrality	Intermediate centrality	Key node mining, node influence computing
Closeness	Closeness centrality	Key node mining, node influence computing
DegreeStatic	Degree of statistical	Graph structure analysis
ClusteringCoefficient	Aggregation coefficient	Recommendation system, telecom fraud analysis
Jaccard	Jaccard similarity	Similarity computing, recommendation system
BFS	Breadth-First Search	Sequence traversal, shortest path planning
Node2Vec	-	Graph classification

17.5 Implementation methods

Nebula Algorithm implements the graph calculating as follows:

1. Read the graph data of DataFrame from the Nebula Graph database using the Nebula Spark Connector.
2. Transform the graph data of DataFrame to the GraphX graph.
3. Use graph algorithms provided by GraphX (such as PageRank) or self-implemented algorithms (such as Louvain).

For detailed implementation methods, see [Scala file](#).

17.6 Get Nebula Algorithm

17.6.1 Compile and package

1. Clone the repository `nebula-algorithm`.

```
$ git clone -b v3.0.0 https://github.com/vesoft-inc/nebula-algorithm.git
```

2. Enter the directory `nebula-algorithm`.

```
$ cd nebula-algorithm
```

3. Compile and package.

```
$ mvn clean package -Dpgp.skip -Dmaven.javadoc.skip=true -Dmaven.test.skip=true
```

After the compilation, a similar file `nebula-algorithm-3.x.x.jar` is generated in the directory `nebula-algorithm/target`.

17.6.2 Download maven from the remote repository

Download address

17.7 How to use

17.7.1 Use algorithm interface (recommended)

The `lib` repository provides 10 common graph algorithms.

1. Add dependencies to the file `pom.xml`.

```
<dependency>
  <groupId>com.vesoft</groupId>
  <artifactId>nebula-algorithm</artifactId>
  <version>3.0.0</version>
</dependency>
```

2. Use the algorithm (take PageRank as an example) by filling in parameters. For more examples, see [example](#).

Note

By default, the `DataFrame` that executes the algorithm sets the first column as the starting vertex, the second column as the destination vertex, and the third column as the edge weights (not the rank in the Nebula Graph).

```
val prConfig = new PRConfig(5, 1.0)
val louvainResult = PageRankAlgo.apply(spark, data, prConfig, false)
```

If your vertex IDs are Strings, see [Pagerank Example](#) for how to encoding and decoding them.

17.7.2 Submit the algorithm package directly

Note

There are limitations to use sealed packages. For example, when sinking a repository into Nebula Graph, the property name of the tag created in the sunk graph space must match the preset name in the code. The first method is recommended if the user has development skills.

1. Set the Configuration file.

```
{
  # Configurations related to Spark
  spark: {
    app: {
      name: LPA
      # The number of partitions of Spark
      partitionNum:100
    }
    master:local
  }

  data: {
    # Data source. Optional values are nebula, csv, and json.
    source: csv
    # Data sink. The algorithm result will be written into this sink. Optional values are nebula, csv, and text.
    sink: nebula
    # Whether the algorithm has a weight.
    hasWeight: false
  }

  # Configurations related to Nebula Graph
  nebula: {
    # Data source. When Nebula Graph is the data source of the graph computing, the configuration of `nebula.read` is valid.
    read: {
      # The IP addresses and ports of all Meta services. Multiple addresses are separated by commas (,). Example: "ip1:port1,ip2:port2".
      # To deploy Nebula Graph by using Docker Compose, fill in the port with which Docker Compose maps to the outside.
      # Check the status with `docker-compose ps`.
      metaAddress: "192.168.*.10:9559"
      # The name of the graph space in Nebula Graph.
      space: basketballplayer
      # Edge types in Nebula Graph. When there are multiple labels, the data of multiple edges will be merged.
      labels: ["serve"]
      # The property name of each edge type in Nebula Graph. This property will be used as the weight column of the algorithm. Make sure that it corresponds to the
      edge type.
      weightCols: ["start_year"]
    }

    # Data sink. When the graph computing result sinks into Nebula Graph, the configuration of `nebula.write` is valid.
    write:{
      # The IP addresses and ports of all Graph services. Multiple addresses are separated by commas (,). Example: "ip1:port1,ip2:port2".
      # To deploy by using Docker Compose, fill in the port with which Docker Compose maps to the outside.
      # Check the status with `docker-compose ps`.
      graphAddress: "192.168.*.11:9669"
      # The IP addresses and ports of all Meta services. Multiple addresses are separated by commas (,). Example: "ip1:port1,ip2:port2".
      # To deploy Nebula Graph by using Docker Compose, fill in the port with which Docker Compose maps to the outside.
      # Check the status with `docker-compose ps`.
      metaAddress: "192.168.*.12:9559"
      user:root
      pswd:nebula
      # Before submitting the graph computing task, create the graph space and tag.
      # The name of the graph space in Nebula Graph.
      space:nb
      # The name of the tag in Nebula Graph. The graph computing result will be written into this tag. The property name of this tag is as follows.
      # PageRank: pagerank
      # Louvain: louvain
      # ConnectedComponent: cc
      # StronglyConnectedComponent: scc
      # LabelPropagation: lpa
      # ShortestPath: shortestpath
      # DegreeStatic: degree,inDegree,outDegree
      # KCore: kcore
      # TriangleCount: trianglecpunt
      # BetweennessCentrality: betweenness
      tag:pagerank
    }
  }

  local: {
    # Data source. When the data source is csv or json, the configuration of `local.read` is valid.
    read:{
      filePath: "hdfs://127.0.0.1:9000/edge/work_for.csv"
      # If the CSV file has a header or it is a json file, use the header. If not, use [_c0, _c1, _c2, ..., _cn] instead.
      # The header of the source VID column.
      srcId:"_c0"
      # The header of the destination VID column.
      dstId:"_c1"
      # The header of the weight column.
      weight: "_c2"
      # Whether the csv file has a header.
      header: false
      # The delimiter in the csv file.
      delimiter:", "
    }

    # Data sink. When the graph computing result sinks to the csv or text file, the configuration of `local.write` is valid.
    write:{
      resultPath:/tmp/
    }
  }
}
```

```

algorithm: {
  # The algorithm to execute. Optional values are as follow:
  # pagerank, louvain, connectedcomponent, labelpropagation, shortestpaths,
  # degreestatic, kcore, stronglyconnectedcomponent, trianglecount ,
  # betweenness, graphtriangleCount.
  executeAlgo: pagerank

  # PageRank
  pagerank: {
    maxIter: 10
    resetProb: 0.15
  }

  # Louvain
  louvain: {
    maxIter: 20
    internalIter: 10
    tol: 0.5
  }

  # ...
}
}

```

2. Submit the graph computing task.

```

${SPARK_HOME}/bin/spark-submit --master <mode> --class com.vesoft.nebula.algorithm.Main <nebula-algorithm-3.0.0.jar_path> -p <application.conf_path>

```

Example:

```

${SPARK_HOME}/bin/spark-submit --master "local" --class com.vesoft.nebula.algorithm.Main /root/nebula-algorithm/target/nebula-algorithm-3.0-SNAPSHOT.jar -p /root/nebula-algorithm/src/main/resources/application.conf

```

Last update: February 16, 2022

18. Nebula Analytics

Nebula Analytics is a high-performance graph computing framework tool that performs graph analysis of data in the Nebula Graph database.

Enterpriseonly

Only available for the Nebula Graph Enterprise Edition.

18.1 Scenarios

You can import data from data sources as Nebula Graph clusters, CSV files on HDFS, or local CSV files into Nebula Analytics and export the graph computation results to Nebula Graph clusters, CSV files on HDFS, or local CSV files from Nebula Analytics.

18.2 Limitations

When you import Nebula Graph cluster data into Nebula Analytics and export the graph computation results from Nebula Analytics to a Nebula Graph cluster, the graph computation results can only be exported to the graph space where the data source is located.

18.3 Version compatibility

The version correspondence between Nebula Analytics and Nebula Graph is as follows.

Nebula Analytics	Nebula Graph
1.0.0	3.0.0

18.4 Graph algorithms

Nebula Analytics supports the following graph algorithms.

Algorithm	Description	Category
APSP	All Pair Shortest Path	Path
SSSP	Single Source Shortest Path	Path
BFS	Breadth-first search	Path
PageRank	It is used to rank web pages.	Node importance measurement
KCore	k-Cores	Node importance measurement
DegreeCentrality	It is a simple count of the total number of connections linked to a vertex.	Node importance measurement
TriangleCount	It counts the number of triangles.	Graph feature
LPA	Label Propagation Algorithm	Community discovery
WCC	World Competitive Contests	Community discovery
LOUVAIN	It detects communities in large networks.	Community discovery
HANP	Hop attenuation & Node Preference	Community discovery
Clustering Coefficient	It is a measure of the degree to which nodes in a graph tend to cluster together.	Clustering

18.5 Install Nebula Analytics

When installing a cluster of multiple Nebula Analytics on multiple nodes, you need to install Nebula Analytics to the same path and set up SSH-free login between nodes.

```
sudo rpm -i nebula-analytics-1.0.0-centos.x86_64.rpm --prefix /home/xxx/nebula-analytics
```

18.6 How to use Nebula Analytics

After installation, you can set parameters of different algorithms and then execute a script to obtain the results of the algorithms and export them to the specified format.

1. Select one node from the Nebula Analytics cluster and then access the `scripts` directory.

```
$ cd scripts
```

2. Confirm the data source and export path. Configuration steps are as follows.

- Nebula Graph clusters as the data source

a. Modify the configuration file `nebula.conf` to configure the Nebula Graph cluster.

```
# The number of retries connecting to Nebula Graph.
--retry=3
# The name of the graph space where you read or write data.
--space=basketballplayer

# Read data from Nebula Graph.
# The meta process address.
--meta_server_addrs=192.168.8.100:9559, 192.168.8.101:9559, 192.168.8.102:9559
# The name of edges.
--edges=LIKES
# The name of the property to be read as the weight of the edge. Can be either the attribute name or _rank.
#--edge_data_fields
# The number of rows read per scan.
--read_batch_size=10000

# Write data to Nebula Graph.
# The graphd process address.
--graph_server_addrs=192.168.8.100:9669
# The account to log into Nebula Graph.
--user=root
# The password to log into Nebula Graph.
--password=nebula
# The pattern used to write data back to Nebula Graph: insert or update.
--mode=insert
# The tag name written back to Nebula Graph.
--tag=pagerank
# The property name corresponding to the tag.
--prop=pr
# The property type corresponding the the tag.
--type=double
# The number of rows per write.
--write_batch_size=1000
# The file path where the data failed to be written back to Nebula Graph is stored.
--err_file=/home/xxx/analytics/err.txt
```

b. Modify the related parameters in the script to be used, such as `run_pagerank.sh`.

```
# The sum of the number of processes running on all machines in the cluster. It is recommended to be the number of machines or the number of nodes in the NUMA
architecture.
WNUM=3
# The number of threads per process. It is recommended to set the maximum value to be the number of hardware threads of the machine.
WCORES=4
# The path to the data source.
# Set to read data from Nebula Graph via the nebula.conf file.
INPUT=${INPUT:="nebula:$PROJECT/scripts/nebula.conf"}
# Set to read data from the CSV files on HDFS or on local directories.
# #INPUT=${INPUT:="$PROJECT/data/graph/v100_e2150_ua_c3.csv"}

# The export path to the graph computation results.
# Data can be exported to a Nebula Graph. If the data source is also a Nebula Graph, the results will be exported to the graph space specified in nebula.conf.
OUTPUT=${OUTPUT:="nebula:$PROJECT/scripts/nebula.conf"}
# Data can also be exported to the CSV files on HDFS or on local directories.
# OUTPUT=${OUTPUT:='hdfs://192.168.8.100:9000/_test/output'}

# If the value is true, it is a directed graph, if false, it is an undirected graph.
IS_DIRECTED=${IS_DIRECTED:=true}
# Set whether to encode ID or not.
NEED_ENCODE=${NEED_ENCODE:=true}
# The ID type of the data source vertices. For example string, int32, and int64.
VTYPE=${VTYPE:=int32}
# Encoding type. The value distributed specifies the distributed vertex ID encoding. The value single specifies the single-machine vertex ID encoding.
ENCODER=${ENCODER:="distributed"}
# The parameter for the PageRank algorithm. Algorithms differ in parameters.
EPS=${EPS:=0.0001}
DAMPING=${DAMPING:=0.85}
# The number of iterations.
ITERATIONS=${ITERATIONS:=100}
```

- Local or HDFS CSV files as the data source

Modify parameters in the script to be used, such as `run_pagerank.sh`.

```
# The sum of the number of processes running on all machines in the cluster. It is recommended to be the number of machines or the number of nodes in the NUMA
architecture.
WNUM=3
# The number of threads per process. It is recommended to set the maximum value to be the number of hardware threads of the machine.
WCORES=4
# The path to the data source.
# Set to read data from Nebula Graph via the nebula.conf file.
# INPUT=${INPUT:="nebula:$PROJECT/scripts/nebula.conf"}
# Set to read data from the CSV files on HDFS or on local directories.
INPUT=${INPUT:="$PROJECT/data/graph/v100_e2150_ua_c3.csv"}

# The export path to the graph computation results.
# Data can be exported to a Nebula Graph. If the data source is also a Nebula Graph, the results will be exported to the graph space specified in nebula.conf.
# OUTPUT=${OUTPUT:="nebula:$PROJECT/scripts/nebula.conf"}
# Data can also be exported to the CSV files on HDFS or on local directories.
OUTPUT=${OUTPUT:='hdfs://192.168.8.100:9000/_test/output'}

# If the value is true, it is a directed graph, if false, it is an undirected graph.
IS_DIRECTED=${IS_DIRECTED:=true}
# Set whether to encode ID or not.
NEED_ENCODE=${NEED_ENCODE:=true}
# The ID type of the data source vertices. For example string, int32, and int64.
VTYPE=${VTYPE:=int32}
# The value distributed specifies the distributed vertex ID encoding. The value single specifies the single-machine vertex ID encoding.
ENCODER=${ENCODER:="distributed"}
# The parameter for the PageRank algorithm. Algorithms differ in parameters.
EPS=${EPS:=0.0001}
DAMPING=${DAMPING:=0.85}
# The number of iterations.
ITERATIONS=${ITERATIONS:=100}
```

3. Modify the configuration file `cluster` to set the Nebula Analytics cluster nodes and task assignment weights for executing the algorithm.

```
# Nebula Analytics Cluster Node IP Addresses: Task Assignment Weights
192.168.8.200:1
192.168.8.201:1
192.168.8.202:1
```

4. Run the algorithm script. For example:

```
./run_pagerank.sh
```

5. View the graph computation results in the export path.

- For exporting to a Nebula Graph cluster, check the results according to the settings in `nebula.conf`.
- For exporting the results to the CSV files on HDFS or on local directories, check the results according to the settings in `OUTPUT`, which is a compressed file in the `.gz` format.

Last update: February 16, 2022

19. Nebula Spark Connector

Nebula Spark Connector is a Spark connector application for reading and writing Nebula Graph data in Spark standard format. Nebula Spark Connector consists of two parts: Reader and Writer.

- Reader

Provides a Spark SQL interface. This interface can be used to read Nebula Graph data. It reads one vertex or edge type data at a time and assemble the result into a Spark DataFrame.

- Writer

Provides a Spark SQL interface. This interface can be used to write DataFrames into Nebula Graph in a row-by-row or batch-import way.

For more information, see [Nebula Spark Connector](#).

19.1 Use cases

Nebula Spark Connector applies to the following scenarios:

- Migrate data between different Nebula Graph clusters.
- Migrate data between different graph spaces in the same Nebula Graph cluster.
- Migrate data between Nebula Graph and other data sources.
- Graph computing with [Nebula Algorithm](#).

19.2 Benefits

The features of Nebula Spark Connector 3.0.0 are as follows:

- Supports multiple connection settings, such as timeout period, number of connection retries, number of execution retries, etc.
- Supports multiple settings for data writing, such as setting the corresponding column as vertex ID, starting vertex ID, destination vertex ID or attributes.
- Supports non-attribute reading and full attribute reading.
- Supports reading Nebula Graph data into VertexRDD and EdgeRDD, and supports non-Long vertex IDs.
- Unifies the extended data source of SparkSQL, and uses DataSourceV2 to extend Nebula Graph data.
- Three write modes, `insert`, `update` and `delete`, are supported. `insert` mode will insert (overwrite) data, `update` mode will only update existing data, and `delete` mode will only delete data.

19.3 Release note

Release

19.4 Get Nebula Spark Connector

19.4.1 Compile package

Note

Install Nebula Spark Connector of version 2.4.x.

1. Clone repository `nebula-spark-connector`.

```
$ git clone -b v3.0.0 https://github.com/vesoft-inc/nebula-spark-connector.git
```

2. Make the `nebula-spark-connector` directory the current working directory.

```
$ cd nebula-spark-connector/nebula-spark-connector
```

3. Compile package.

```
$ mvn clean package -Dmaven.test.skip=true -Dgpg.skip -Dmaven.javadoc.skip=true
```

After compilation, a similar file `nebula-spark-connector-3.0.0-SNAPSHOT.jar` is generated in the directory `nebula-spark-connector/nebula-spark-connector/target/`.

19.4.2 Download maven remote repository

Download

19.5 How to use

When using Nebula Spark Connector to reading and writing Nebula Graph data, You can refer to the following code.

```
# Read vertex and edge data from Nebula Graph.
spark.read.nebula().loadVerticesToDF()
spark.read.nebula().loadEdgesToDF()

# Write dataframe data into Nebula Graph as vertex and edges.
dataframe.write.nebula().writeVertices()
dataframe.write.nebula().writeEdges()
```

`nebula()` receives two configuration parameters, including connection configuration and read-write configuration.

19.5.1 Reading data from Nebula Graph

```
val config = NebulaConnectionConfig
  .builder()
  .withMetaAddress("127.0.0.1:9559")
  .withConenctionRetry(2)
  .withExecuteRetry(2)
  .withTimeout(6000)
  .build()

val nebulaReadVertexConfig: ReadNebulaConfig = ReadNebulaConfig
  .builder()
  .withSpace("test")
  .withLabel("person")
  .withNoColumn(false)
  .withReturnCols(List("birthday"))
  .withLimit(10)
  .withPartitionNum(10)
  .build()
val vertex = spark.read.nebula(config, nebulaReadVertexConfig).loadVerticesToDF()

val nebulaReadEdgeConfig: ReadNebulaConfig = ReadNebulaConfig
  .builder()
  .withSpace("test")
  .withLabel("knows")
  .withNoColumn(false)
  .withReturnCols(List("degree"))
  .withLimit(10)
  .withPartitionNum(10)
```

```
.build()
val edge = spark.read.nebula(config, nebulaReadEdgeConfig).loadEdgesToDF()
```

- `NebulaConnectionConfig` is the configuration for connecting to the nebula graph, as described below.

Parameter	Required	Description
<code>withMetaAddress</code>	Yes	Specifies the IP addresses and ports of all Meta Services. Separate multiple addresses with commas. The format is <code>ip1:port1,ip2:port2,...</code> . Read data is no need to configure <code>withGraphAddress</code> .
<code>withConnectionRetry</code>	No	The number of retries that the Nebula Java Client connected to the Nebula Graph. The default value is <code>1</code> .
<code>withExecuteRetry</code>	No	The number of retries that the Nebula Java Client executed query statements. The default value is <code>1</code> .
<code>withTimeout</code>	No	The timeout for the Nebula Java Client request response. The default value is <code>6000</code> , Unit: ms.

- `ReadNebulaConfig` is the configuration to read Nebula Graph data, as described below.

Parameter	Required	Description
<code>withSpace</code>	Yes	Nebula Graph space name.
<code>withLabel</code>	Yes	The Tag or Edge type name within the Nebula Graph space.
<code>withNoColumn</code>	No	Whether the property is not read. The default value is <code>false</code> , read property. If the value is <code>true</code> , the property is not read, the <code>withReturnCols</code> configuration is invalid.
<code>withReturnCols</code>	No	Configures the set of properties for vertex or edges to read. the format is <code>List(property1,property2,...)</code> , The default value is <code>List()</code> , indicating that all properties are read.
<code>withLimit</code>	No	Configure the number of rows of data read from the server by the Nebula Java Storage Client at a time. The default value is <code>1000</code> .
<code>withPartitionNum</code>	No	Configures the number of Spark partitions to read the Nebula Graph data. The default value is <code>100</code> . This value should not exceed the number of slices in the graph space (<code>partition_num</code>).

19.5.2 Write data into Nebula Graph

Note

The values of columns in a dataframe are automatically written to the Nebula Graph as property values.

```
val config = NebulaConnectionConfig
    .builder()
    .withMetaAddress("127.0.0.1:9559")
    .withGraphAddress("127.0.0.1:9669")
    .withConenctionRetry(2)
    .build()

val nebulaWriteVertexConfig: WriteNebulaVertexConfig = WriteNebulaVertexConfig
    .builder()
    .withSpace("test")
    .withTag("person")
    .withVidField("id")
    .withVidPolicy("hash")
    .withVidAsProp(true)
    .withUser("root")
    .withPasswd("nebula")
    .withBatch(1000)
    .build()
df.write.nebula(config, nebulaWriteVertexConfig).writeVertices()

val nebulaWriteEdgeConfig: WriteNebulaEdgeConfig = WriteNebulaEdgeConfig
    .builder()
    .withSpace("test")
```

```

.withEdge("friend")
.withSrcIdField("src")
.withSrcPolicy(null)
.withDstIdField("dst")
.withDstPolicy(null)
.withRankField("degree")
.withSrcAsProperty(true)
.withDstAsProperty(true)
.withRankAsProperty(true)
.withUser("root")
.withPasswd("nebula")
.withBatch(1000)
.build()
df.write.nebula(config, nebulaWriteEdgeConfig).writeEdges()

```

The default write mode is `insert`, which can be changed to `update` via `withWriteMode` configuration:

```

val config = NebulaConnectionConfig
    .builder()
    .withMetaAddress("127.0.0.1:9559")
    .withGraphAddress("127.0.0.1:9669")
    .build()
val nebulaWriteVertexConfig = WriteNebulaVertexConfig
    .builder()
    .withSpace("test")
    .withTag("person")
    .withVidField("id")
    .withVidAsProp(true)
    .withBatch(1000)
    .withWriteMode(WriteMode.UPDATE)

```

```
.build()
df.write.nebula(config, nebulaWriteVertexConfig).writeVertices()
```

- `NebulaConnectionConfig` is the configuration for connecting to the nebula graph, as described below.

Parameter	Required	Description
<code>withMetaAddress</code>	Yes	Specifies the IP addresses and ports of all Meta Services. Separate multiple addresses with commas. The format is <code>ip1:port1,ip2:port2,...</code> .
<code>withGraphAddress</code>	Yes	Specifies the IP addresses and ports of Graph Services. Separate multiple addresses with commas. The format is <code>ip1:port1,ip2:port2,...</code> .
<code>withConnectionRetry</code>	No	Number of retries that the Nebula Java Client connected to the Nebula Graph. The default value is <code>1</code> .

- `WriteNebulaVertexConfig` is the configuration of the write vertex, as described below.

Parameter	Required	Description
<code>withSpace</code>	Yes	Nebula Graph space name.
<code>withTag</code>	Yes	The Tag name that needs to be associated when a vertex is written.
<code>withVidField</code>	Yes	The column in the DataFrame as the vertex ID.
<code>withVidPolicy</code>	No	When writing the vertex ID, Nebula Graph use mapping function, supports HASH only. No mapping is performed by default.
<code>withVidAsProp</code>	No	Whether the column in the DataFrame that is the vertex ID is also written as an property. The default value is <code>false</code> . If set to <code>true</code> , make sure the Tag has the same property name as <code>VidField</code> .
<code>withUser</code>	No	Nebula Graph user name. If <code>authentication</code> is disabled, you do not need to configure the user name and password.
<code>withPasswd</code>	No	The password for the Nebula Graph user name.
<code>withBatch</code>	Yes	The number of rows of data written at a time. The default value is <code>1000</code> .
<code>withWriteMode</code>	No	Write mode. The optional values are <code>insert</code> and <code>update</code> . The default value is <code>insert</code> .

`WriteNebulaEdgeConfig` is the configuration of the write edge, as described below.

Parameter	Required	Description
<code>withSpace</code>	Yes	Nebula Graph space name.
<code>withEdge</code>	Yes	The Edge type name that needs to be associated when a edge is written.
<code>withSrcIdField</code>	Yes	The column in the DataFrame as the vertex ID.
<code>withSrcPolicy</code>	No	When writing the starting vertex ID, Nebula Graph use mapping function, supports HASH only. No mapping is performed by default.
<code>withDstIdField</code>	Yes	The column in the DataFrame that serves as the destination vertex.
<code>withDstPolicy</code>	No	When writing the destination vertex ID, Nebula Graph use mapping function, supports HASH only. No mapping is performed by default.
<code>withRankField</code>	No	The column in the DataFrame as the rank. Rank is not written by default.
<code>withSrcAsProperty</code>	No	Whether the column in the DataFrame that is the starting vertex is also written as an property. The default value is <code>false</code> . If set to <code>true</code> , make sure Edge type has the same property name as <code>SrcIdField</code> .
<code>withDstAsProperty</code>	No	Whether column that are destination vertex in the DataFrame are also written as property. The default value is <code>false</code> . If set to <code>true</code> , make sure Edge type has the same property name as <code>DstIdField</code> .
<code>withRankAsProperty</code>	No	Whether column in the DataFrame that is the rank is also written as property. The default value is <code>false</code> . If set to <code>true</code> , make sure Edge type has the same property name as <code>RankField</code> .
<code>withUser</code>	No	Nebula Graph user name. If <code>authentication</code> is disabled, you do not need to configure the user name and password.
<code>withPasswd</code>	No	The password for the Nebula Graph user name.
<code>withBatch</code>	Yes	The number of rows of data written at a time. The default value is <code>1000</code> .
<code>withWriteMode</code>	No	Write mode. The optional values are <code>insert</code> and <code>update</code> . The default value is <code>insert</code> .

Last update: February 16, 2022

20. Nebula Flink Connector

Nebula Flink Connector is a connector that helps Flink users quickly access Nebula Graph. Nebula Flink Connector supports reading data from the Nebula Graph database or writing other external data to the Nebula Graph database.

For more information, see [Nebula Flink Connector](#).

20.1 Use cases

Nebula Flink Connector applies to the following scenarios:

- Migrate data between different Nebula Graph clusters.
- Migrate data between different graph spaces in the same Nebula Graph cluster.
- Migrate data between Nebula Graph and other data sources.

20.2 Release note

Release

Last update: January 14, 2022

21. Nebula Bench

Nebula Bench is a performance test tool for Nebula Graph using the LDBC data set.

21.1 Scenario

- Generate test data and import Nebula Graph.
- Performance testing in the Nebula Graph cluster.

21.2 Release note

Release

21.3 Test process

1. Generate test data by using `ldbc_snb_datagen`.
2. Import data to Nebula Graph by using the Importer.
3. Performance testing by using K6 with the XK6-Nebula plug-in.


For detailed usage instructions, see [Nebula Bench](#).

Last update: January 14, 2022

22. Appendix

22.1 Nebula Graph learning path

This topic is for anyone interested in learning more about Nebula Graph. You can master Nebula Graph from zero to hero through the documentation and videos in Nebula Graph learning path.

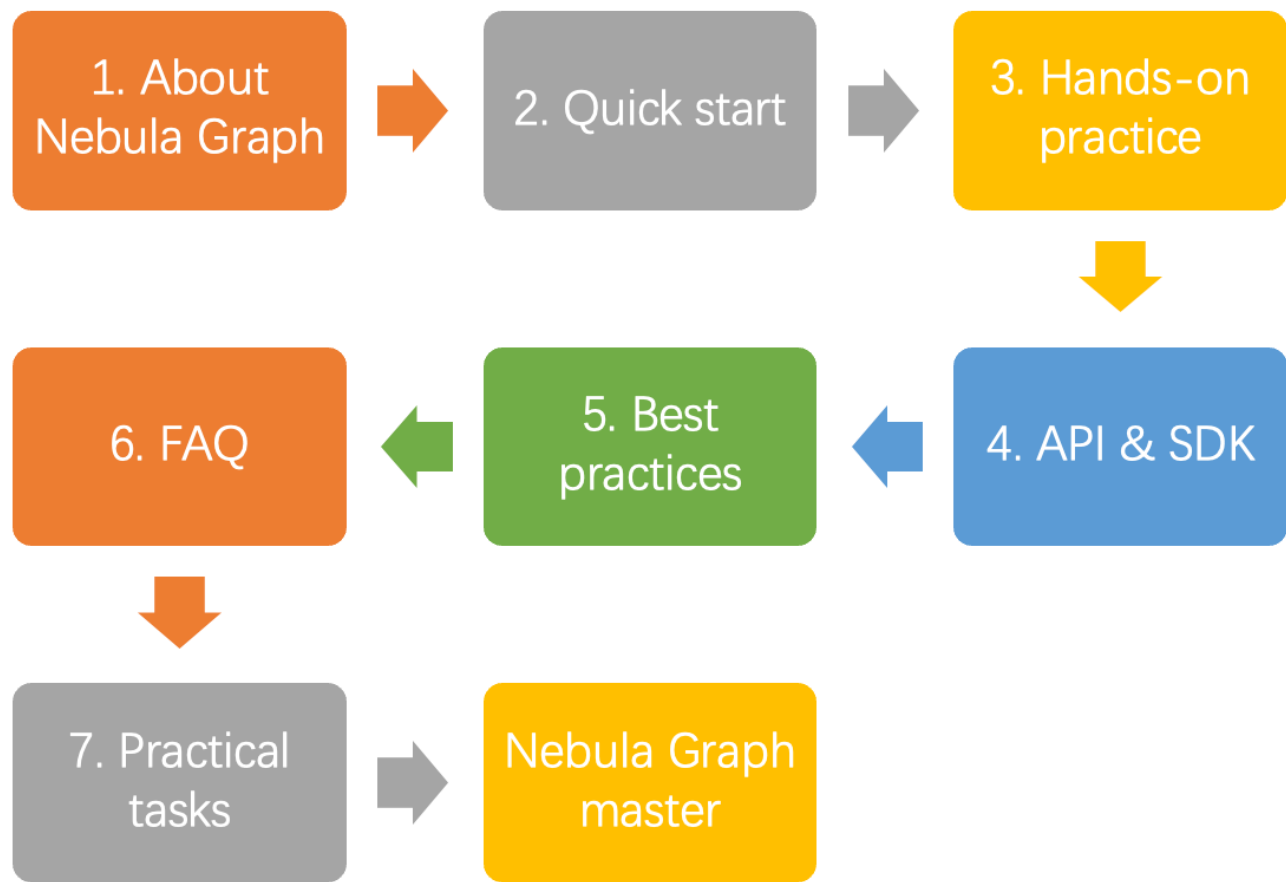

22.1.1 1. About Nebula Graph

1.1 What is Nebula Graph?

Document	Video
What is Nebula Graph	Nebula Graph

1.2 Data models

Document
Data modeling

1.3 Path

Document
Path

1.4 Nebula Graph architecture

Document

[Meta service](#)

[Graph service](#)

[Storage service](#)

22.1.2 2. Quick start

2.1 Install Nebula Graph

Document

[Install with a RPM or DEB package](#)

[Install with a TAR package](#)

[Install with Docker](#)

[Install from source](#)

Video

-

-

[Install Nebula Graph with Docker and Docker Compose](#)

[Install Nebula Graph with Source Code](#)

2.2 Start Nebula Graph

Document

[Start and stop Nebula Graph](#)

2.3 Connect to Nebula Graph

Document

[Connect to Nebula Graph](#)

2.4 Use nGQL statements

Document

[nGQL cheatsheet](#)

22.1.3 3. Hands-on practices

3.1 Deploy a multi-machine cluster

Document

[Deploy a Nebula Graph cluster with RPM/DEB](#)

3.2 Upgrade Nebula Graph

Document

[Upgrade Nebula Graph to v3.0.0](#)

[Upgrade Nebula Graph from v2.0.x to v3.0.0](#)

3.3 Configure Nebula Graph

Document

[Configure Meta](#)

[Configure Graph](#)

[Configure Storage](#)

[Configure Linux kernel](#)

3.4 Configure logs

Document

[Log managements](#)

3.5 O&M and Management

- Account authentication and authorization

Document

[Local authentication](#)

[OpenLDAP](#)

[User management](#)

[Roles and privileges](#)

- Balance the distribution of partitions

Document

[Storage load balancing](#)

- Monitoring

Document

[Nebula Graph metrics](#)

[RocksDB statistics](#)

- Data snapshot

Document

[Create snapshots](#)

- SSL encryption

Document

[SSL](#)

3.6 Performance tuning

Document

Graph data modeling suggestions

System design suggestions

Compaction

3.7 Derivative software

- Visualization

Visualization tools	Document	Video
Data visualization	Nebula Graph Studio	Nebula Studio
Data monitoring and O&M	Nebula Dashboard Community Edition & Nebula Dashboard Enterprise Edition	-
Data analysis	Nebula Explorer Enterprise Edition	-

- Data import and export

Import and export	Document	Video
Data import	Nebula Importer	Nebula Importer
Data import	Nebula Spark Connector	-
Data import	Nebula Flink Connector	-
Data import	Nebula Exchange Community Edition	-
Data export	Nebula Exchange Enterprise Edition	-

- Performance test

Document
Nebula Bench

- Cluster O&M

Document
Nebula Operator

- Graph algorithm

Document
Nebula Algorithm

- Clients

Document
Nebula Console
Nebula CPP
Nebula Java
Nebula Python
Nebula Go

22.1.4 4. API & SDK

Document
API & SDK

22.1.5 5. Best practices

Document

[Handling Tens of Billions of Threat Intelligence Data with Graph Database at Kuaishou](#)

[Import data from Neo4j to Nebula Graph via Nebula Exchange: Best Practices](#)

[Hands-On Experience: Import Data to Nebula Graph with Spark](#)

[How to Select a Graph Database: Best Practices at RoyalFlush](#)

[Practicing Nebula Operator on Cloud](#)

[Using Ansible to Automate Deployment of Nebula Graph Cluster](#)

22.1.6 6. FAQ

Document

[FAQ](#)

22.1.7 7. Practical tasks

You can check if you have mastered Nebula Graph by completing the following practical tasks.

Task	Reference
Compile the source code of Nebula Graph	Install Nebula Graph by compiling the source code
Deploy Studio, Dashboard, and Explorer	Deploy Studio , Deploy Dashboard , and Deploy Explorer
Load test Nebula Graph with K6	Nebula Bench
Import LDBC data	Nebula Graph 1.0 Benchmark Report based on the LDBC Dataset
Query LDBC data, such as queries for vertices, paths, or subgraphs.	LDBC and interactive-short-1.cypher

Last update: January 28, 2022

22.2 Nebula Graph 3.0.0 release notes

22.2.1 Feature

- Support Backup and Restore. #3469 #1 #22
- Support openCypher queries with multiple MATCH statements. #3519 #3318
- Support Standalone Nebula Graph. #3310
- Support key-value separation for the storage engine. #3281
- Support topN pushdown for LOOKUP. #3499
- Support vertices without tags. #3316 #3335 #3328 #3286
- Support parameterized queries. #3379
- Support queries without specifying VIDs but a LIMIT clause must be used to restrict the number of results #3320 #3329 #3262
- Support duration. #3338
- Support schema with Chinese characters. #3380 #3440
- Support DESCRIBE USER. #3300

22.2.2 Enhancement

- Refactor cluster management. #3343
- Add log monitor to check free bytes for log disks, change log level when your graph space is almost full. #3576
- Support any string for tag names in apostrophe. #3424
- Support that the storage service sends partition disk paths to the meta. #3369 #3416
- Add constraints on invalid password attempts. #3573 #3629
- Support DELETE in TOSS. #3374
- Support to use logrotate. #3541
- Support more metrics. #3446 #3605 #3590
- Enhancement date and time parser. #3179
- Remove read lock in the meta service to reduce the side effect of read-write locks. #3256
- Refactor storage indexes to solve the coupling problem between services. #3196
- Support specifying the floating point accuracy of the round() function. #3178
- Support HTTPS for the ES client. #3150
- Move version info outside of heartbeat. #3378
- Support empty list, set, and map. #3302
- Support specifying s2 region coverage parameters when creating a geo index. #3396
- Add version info for SHOW HOSTS. #3702

22.2.3 Bugfix

- Fix the bug that memory is not released when a default value is used and no value is specified in nGQL. [#3666](#)
- Fix the bug that the function `coalesce()` cannot be used. [#3653](#)
- Fix the bug that using multiple INSERT on an indexed tag will lead to incorrect LOOKUP results. [#3627](#)
- Fix the crash when the expression exceeds the depth. [#3606](#)
- Disable the aggregate function in the `YIELD` and `WHERE` clauses of nGQL. [#3597](#)
- Fix the crash when using the aggregate function in `UNWILD` and `WHERE` clauses. [#3397](#) [#3355](#)
- Fix the bug that the tag index is rebuilt with an old schema version value. [#3332](#)
- Fix the bug that the query results will still contain the expired edges if we use `GO...REVERSELY`. [#3536](#)
- Fix the memory estimation error info in CentOS 6.0. [#3534](#)
- Fix the crash when the `LOOKUP` statement contains a filter that consists of a logical And expression and an IN expression with only one element. [#3525](#)
- Fix the bug that metad progress is suspended under heavy load. [#3482](#)
- Fix the unwinding subgraph crash. [#3506](#)
- Fix the `DROP SPACE` crash when rebuilding an index. [#3406](#)
- Fix the bug of reading memory stats under cgroup v2. [#3419](#)
- Fix the bug that `DROP TAG INDEX` deletes the edge index with the same name unexpectedly, and vice versa for the deletion of the tag index. [#3413](#)
- Fix the bug that edges are not shown after a graph space is cloned. [#3351](#)
- Fix the index existence check problem. [#3315](#)
- Fix a bug that running the `ALTER` statement to query the type property may lead to a null pointer obtained by the graph service. [#3325](#)
- Optimized the Raft to make the system more stable. [#3172](#) [#3435](#) [#3358](#) [#3322](#) [#3031](#)
- Cancel memory check when the ratio is greater than 1.0. [#3289](#)
- Fix building with ninja error. [#3195](#)
- Fix the bug that creating tag and edge with the same name at the same time may both succeed. [#3735](#)
- Fix the full-text index creation failure when there are the same tags or edges in different spaces. [#3747](#)
- Fix variable inconsistency in `YIELD` clauses and `GO` statements. [#3430](#)
- Fix the crash when schema version is greater than 256. [#3893](#)

22.2.4 Incompatibility

Nebula Graph 3.0.0 does not support the most ecosystem tools of v2.x, please upgrade the [ecosystem tools](#).

- The storage services added in the configuration files cannot be read or written directly. The configuration files only register the storage services into the meta services. You must run the `ADD HOSTS` command to read and write data on storage servers. [#3343](#)
- Disable ZONE and GROUP. [#3776](#) [#3825](#) [#3330](#)
- Disable `BALANCE DATA`. [#3756](#)
- Modify the default session timeout from `0` to `28800` seconds, limit the value to between `1` and `604800` seconds. [#3357](#) [#3807](#)
- Add `SHOW LOCAL SESSIONS` and `SHOW LOCAL QUERIES` commands, and deprecate `SHOW ALL QUERIES`. [#3488](#)
- A tag is not required for a vertex. `DELETE VERTEX` only deletes the vertices and does not delete the related outgoing and incoming edges of the vertices. At this time, there will be hanging edges by default. [#3316](#) [#3335](#) [#3328](#) [#3286](#)
- Disable the `YIELD` clause to return custom variables. [#3271](#)
- The `YIELD` clause is required in the `FETCH`, `GO`, `LOOKUP`, `FIND PATH` and `GET SUBGRAPH` statements. [#2957](#) [#3056](#) [#3139](#)
- Add non-reserved keywords: `s2_max_level`, `s2_max_cells`. [#3396](#)
- It is required to specify a tag to query properties of a vertex in a `MATCH` statement. For example, from `return v.name` to `return v.player.name`. [#3255](#)

22.2.5 Legacy versions

Release notes of legacy versions

Last update: February 16, 2022

22.3 FAQ

This topic lists the frequently asked questions for using Nebula Graph 3.0.0. You can use the search box in the help center or the search function of the browser to match the questions you are looking for.

If the solutions described in this topic cannot solve your problems, ask for help on the [Nebula Graph forum](#) or submit an issue on [GitHub issue](#).

22.3.1 About manual updates

"Why is the behavior in the manual not consistent with the system?"

Nebula Graph is still under development. Its behavior changes from time to time. Users can submit an [issue](#) to inform the team if the manual and the system are not consistent.

Note

If you find some errors in this topic:

1. Click the [pencil](#) button at the top right side of this page.
2. Use markdown to fix this error. Then click "Commit changes" at the bottom, which will start a Github pull request.
3. Sign the [CLA](#). This pull request will be merged after the acceptance of at least two reviewers.

22.3.2 About legacy version compatibility

version compatibility

Nebula Graph 3.0.0 is **not compatible** with Nebula Graph 1.x nor 2.0-RC in both data formats and RPC-protocols, and **vice versa**. To upgrade data formats, see [Upgrade Nebula Graph to the current version](#). Users must upgrade [all clients](#).

22.3.3 About executions

About dangling edges

A dangling edge is an edge that only connects to a single vertex and only one part of the edge connects to the vertex.

Dangling edges may appear in Nebula Graph 3.0.0 as the design. And there is no [MERGE](#) statements of openCypher. The guarantee for dangling edges depends entirely on the application level. For more information, see [INSERT VERTEX](#), [DELETE VERTEX](#), [INSERT EDGE](#), [DELETE EDGE](#).

"How to resolve [ERROR (-1005)]: Used memory hits the high watermark(0.800000) of total system memory.?"

The reason for this error may be that `system_memory_high_watermark_ratio` specifies the trigger threshold of the memory high watermark alarm mechanism. The default value is `0.8`. If the system memory usage is higher than this value, an alarm mechanism will be triggered, and Nebula Graph will stop querying.

Possible solutions are as follows:

- Clean the system memory to make it below the threshold.
- [Modify the Graph configuration](#). Add the `system_memory_high_watermark_ratio` parameter to the configuration files of all Graph servers, and set it greater than `0.8`, such as `0.9`.

"How to resolve the error `Storage Error E_RPC_FAILURE ?`"

The reason for this error is usually that the stored process returns too many data back to the graphd process. Possible solutions are as follows:

- **Modify configuration files:** Modify the value of `--storage_client_timeout_ms` in the `nebula-graphd.conf` file to extend the connection timeout of the Storage client. This configuration is measured in milliseconds (ms). For example, set `--storage_client_timeout_ms=60000`. If this parameter is not specified in the `nebula-graphd.conf` file, specify it manually. Tip: Add `--local_config=true` at the beginning of the configuration file and restart the service.
- **Optimize the query statement:** Reduce queries that scan the entire database. No matter whether `LIMIT` is used to limit the number of returned results, use the `GO` statement to rewrite the `MATCH` statement (the former is optimized, while the latter is not).
- Check whether the Stored process has OOM. (`dmesg |grep nebula`).
- Use better SSD or memory for the Storage Server.
- Retry.

"How to resolve the error `The leader has changed. Try again later ?`"

It is a known issue. Just retry 1 to N times, where N is the partition number. The reason is that the meta client needs some heartbeats to update or errors to trigger the new leader information.

"How to resolve the error `SemanticError: Missing yield clause. ?`"

Starting with Nebula Graph 3.0.0, the statements `LOOKUP`, `GO`, and `FETCH` must output results with the `YIELD` clause. For more information, see [YIELD](#).

"How to resolve the error `To get the property of the vertex in 'v.age', should use the format 'var.tag.prop' ?`"

From Nebula Graph version 3.0.0, patterns support matching multiple tags at the same time, so you need to specify a tag name when querying properties. The original statement `RETURN variable_name.property_name` is changed to `RETURN variable_name.<tag_name>.property_name`.

"How is the `time spent` value at the end of each return message calculated?"

Take the returned message of `SHOW SPACES` as an example:

```
nebula> SHOW SPACES;
+-----+
| Name |
+-----+
| "basketballplayer" |
+-----+
Got 1 rows (time spent 1235/1934 us)
```

- The first number `1235` shows the time spent by the database itself, that is, the time it takes for the query engine to receive a query from the client, fetch the data from the storage server, and perform a series of calculations.
- The second number `1934` shows the time spent from the client's perspective, that is, the time it takes for the client from sending a request, receiving a response, and displaying the result on the screen.

"Can I set `replica_factor` as an even number in `CREATE SPACE` statements, e.g., `replica_factor = 2` ?"

NO.

The Storage service guarantees its availability based on the Raft consensus protocol. The number of failed replicas must not exceed half of the total replica number.

When the number of machines is 1, `replica_factor` can only be set to 1.

When there are enough machines and `replica_factor=2`, if one replica fails, the Storage service fails. No matter `replica_factor=3` or `replica_factor=4`, if more than one replica fails, the Storage Service fails. To prevent unnecessary waste of resources, we recommend that you set an odd replica number.

We suggest that you set `replica_factor=3` for a production environment and `replica_factor=1` for a test environment. Do not use an even number.

"Is stopping or killing slow queries supported?"


Yes. For more information, see [Kill query](#).

"Why are the query results different when using `GO` and `MATCH` to execute the same semantic query?"

The possible reasons are listed as follows.

- `GO` statements find the dangling edges.
- `RETURN` commands do not specify the sequence.
- The dense vertex truncation limitation defined by `max_edge_returned_per_vertex` in the Storage service is triggered.
- Using different types of paths may cause different query results.
- `GO` statements use `walk`. Both vertices and edges can be repeatedly visited in graph traversal.
- `MATCH` statements are compatible with openCypher and use `trail`. Only vertices can be repeatedly visited in graph traversal.

The example is as follows.

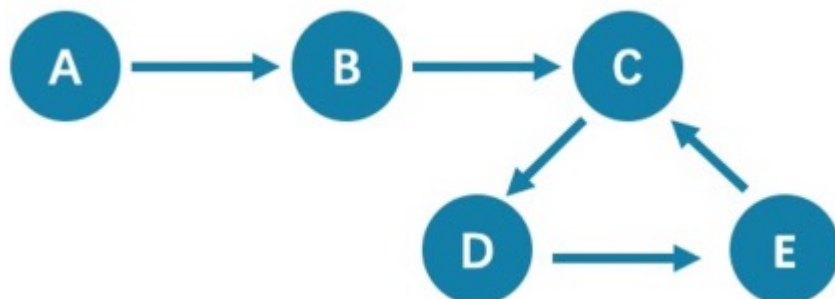

All queries that start from `A` with 5 hops will end at `C` (`A->B->C->D->E->C`). If it is 6 hops, the `GO` statement will end at `D` (`A->B->C->D->E->C->D`), because the edge `C->D` can be visited repeatedly. However, the `MATCH` statement returns empty, because edges cannot be visited repeatedly.

Therefore, using `GO` and `MATCH` to execute the same semantic query may cause different query results.

For more information, see [Wikipedia](#).

"How to resolve `[ERROR (-7)]: SyntaxError: syntax error near ?`"

In most cases, a query statement requires a `YIELD` or a `RETURN`. Check your query statement to see if `YIELD` or `RETURN` is provided.

"How to count the vertices/edges number of each tag/edge type?"

See [show-stats](#).

"How to get all the vertices/edge of each tag/edge type?"

1. Create and rebuild the index.

```
> CREATE TAG INDEX IF NOT EXISTS i_player ON player();
> REBUILD TAG INDEX IF NOT EXISTS i_player;
```

2. Use `LOOKUP` or `MATCH`. For example:

```
> LOOKUP ON player;
> MATCH (n:player) RETURN n;
```

For more information, see [INDEX](#), [LOOKUP](#), and [MATCH](#).

"How to get all the vertices/edges without specifying the types?"

By nGQL, you CAN NOT directly getting all the vertices without specifying the tags, neither the edges, or you can use the `LIMIT` clause to limit the number of returns.

E.g., You CAN NOT run `MATCH (n) RETURN (n)`. An error like

Scan vertices or edges need to specify a limit number, or limit number can not push down. will be returned.

You can use [Nebula Algorithm](#).

Or get vertices by each tag, and then group them by yourself.

"How to resolve the error can't solve the start vids from the sentence ?"

The graphd process requires `start vids` to begin a graph traversal. The `start vids` can be specified by the user. For example:

```
> GO FROM ${vids} ...
> MATCH (src) WHERE id(src) == ${vids}
# The "start vids" are explicitly given by ${vids}.
```

It can also be found from a property index. For example:

```
# CREATE TAG INDEX IF NOT EXISTS i_player ON player(name(20));
# REBUILD TAG INDEX i_player;

> LOOKUP ON player WHERE player.name == "abc" | ... YIELD ...
> MATCH (src) WHERE src.name == "abc" ...
# The "start vids" are found from the property index "name".
```

Otherwise, an error like `can't solve the start vids from the sentence` will be returned.

"How to resolve the error Wrong vertex id type: 1001 ?"

Check whether the VID is `INT64` or `FIXED_STRING(N)` set by `create space`. For more information, see [create space](#).

"How to resolve the error The VID must be a 64-bit integer or a string fitting space vertex id length limit. ?"

Check whether the length of the VID exceeds the limitation. For more information, see [create space](#).

"How to resolve the error edge conflict or vertex conflict ?"

Nebula Graph may return such errors when the Storage service receives multiple requests to insert or update the same vertex or edge within milliseconds. Try the failed requests again later.

"How to resolve the error `RPC failure in MetaClient: Connection refused ?`"

The reason for this error is usually that the metad service status is unusual, or the network of the machine where the metad and graphd services are located is disconnected. Possible solutions are as follows:

- Check the metad service status on the server where the metad is located. If the service status is unusual, restart the metad service.
- Use `telnet meta-ip:port` to check the network status under the server that returns an error.
- Check the port information in the configuration file. If the port is different from the one used when connecting, use the port in the configuration file or modify the configuration.

"How to resolve the error `StorageClientBase.inl:214] Request to "x.x.x.x":9779 failed: N6apache6thrift9transport19TTransportExceptionE: Timed Out in nebula-graph.INFO ?`"

The reason for this error may be that the amount of data to be queried is too large, and the storaged process has timed out. Possible solutions are as follows:

- When importing data, set `Compaction` manually to make read faster.
- Extend the RPC connection timeout of the Graph service and the Storage service. Modify the value of `--storage_client_timeout_ms` in the `nebula-storaged.conf` file. This configuration is measured in milliseconds (ms). The default value is 60000ms.

"How to resolve the error `MetaClient.cpp:65] Heartbeat failed, status:Wrong cluster! in nebula-storaged.INFO , Or HBProcessor.cpp:54] Reject wrong cluster host "x.x.x.x":9771! in nebula-metad.INFO ?`"

The reason for this error may be that the user has modified the IP or the port information of the metad process, or the storage service has joined other clusters before. Possible solutions are as follows:

Delete the `cluster.id` file in the installation directory where the storage machine is deployed (the default installation directory is `/usr/local/nebula`), and restart the storaged service.

Can non-English characters be used as identifiers, such as the names of graph spaces, tags, edge types, properties, and indexes?

Yes, for more information, see [Keywords and reserved words](#).

"How to get the out-degree/the in-degree of a vertex with a given name?"

The out-degree of a vertex refers to the number of edges starting from that vertex, while the in-degree refers to the number of edges pointing to that vertex.

```
nebula > MATCH (s)-[e]->() WHERE id(s) == "given" RETURN count(e); #Out-degree
nebula > MATCH (s)-[e]-() WHERE id(s) == "given" RETURN count(e); #In-degree
```

"How to quickly get the out-degree and in-degree of all vertices?"

There is no such command.

You can use [Nebula Algorithm](#).

"How to resolve `[ERROR (-1005)]: Schema not exist: xxx ?`"

If the system returns `Schema not exist` when querying, make sure that:

- Whether there is a tag or an edge type in the Schema.
- Whether the name of the tag or the edge type is a keyword. If it is a keyword, enclose them with backquotes (```). For more information, see [Keywords](#).

Unable to download SNAPSHOT packages when compiling Exchange, Connectors, or Algorithm

Problem description: The system reports `Could not find artifact com.vesoft:client:jar:xxx-SNAPSHOT` when compiling.

Cause: There is no local Maven repository for storing or downloading SNAPSHOT packages. The default central repository in Maven only stores official releases, not development versions (SNAPSHOTS).

Solution: Add the following configuration in the `profiles` scope of Maven's `setting.xml` file:

```
<profile>
  <activation>
    <activeByDefault>true</activeByDefault>
  </activation>
  <repositories>
    <repository>
      <id>snapshots</id>
      <url>https://oss.sonatype.org/content/repositories/snapshots</url>
      <snapshots>
        <enabled>true</enabled>
      </snapshots>
    </repository>
  </repositories>
</profile>
```

22.3.4 About operation and maintenance

"The log files are too large. How to recycle the logs?"

By default, the logs of Nebula Graph are stored in `/usr/local/nebula/logs/`. The INFO level log files are `nebula-graphd.INFO`, `nebula-storaged.INFO`, `nebula-metad.INFO`. If an alarm or error occurs, the suffixes are modified as `.WARNING` or `.ERROR`.

Nebula Graph uses `glog` to print logs. `glog` cannot recycle the outdated files. To rotate logs, you can:

- Use `crontab` to delete logs periodically. For more information, see [Glog should delete old log files automatically](#).
- Use `logrotate` to manage log files. Before using `logrotate`, modify the configurations of corresponding services and set `timestamp_in_logfile_name` to `false`.

"How to check the Nebula Graph version?"

If the service is running: run command `SHOW HOSTS META` in `nebula-console`. See [SHOW HOSTS](#).

If the service is not running:

Different installation methods make the method of checking the version different. The instructions are as follows:

If the service is not running, run the command `./<binary_name> --version` to get the version and the Git commit IDs of the Nebula Graph binary files. For example:

```
$ ./nebula-graphd --version
```

- If you deploy Nebula Graph with Docker Compose

Check the version of Nebula Graph deployed by Docker Compose. The method is similar to the previous method, except that you have to enter the container first. The commands are as follows:

```
docker exec -it nebula-docker-compose_graphd_1 bash
cd bin/
./nebula-graphd --version
```

- If you install Nebula Graph with RPM/DEB package

Run `rpm -qa |grep nebula` to check the version of Nebula Graph.

"After changing the name of the host, the old one keeps displaying OFFLINE. What should I do?"

Hosts with the status of `OFFLINE` will be automatically deleted after one day.

22.3.5 About connections

"Which ports should be opened on the firewalls?"

If you have not modified the predefined ports in the [Configurations](#), open the following ports for the Nebula Graph services:

Service	Port
Meta	9559, 9560, 19559, 19560
Graph	9669, 19669, 19670
Storage	9777 ~ 9780, 19779, 19780

If you have customized the configuration files and changed the predefined ports, find the port numbers in your configuration files and open them on the firewalls.

For those eco-tools, see the corresponding document.

"How to test whether a port is open or closed?"

You can use telnet as follows to check for port status.

```
telnet <ip> <port>
```

Note

If you cannot use the telnet command, check if telnet is installed or enabled on your host.

For example:

```
// If the port is open:
$ telnet 192.168.1.10 9669
Trying 192.168.1.10...
Connected to 192.168.1.10.
Escape character is '^]'.

// If the port is closed or blocked:
$ telnet 192.168.1.10 9777
Trying 192.168.1.10...
telnet: connect to address 192.168.1.10: Connection refused
```

22.3.6 About license


How do I know when my license expires and how do I renew it after it has expired?

Within 3 days before and 7 days after the expiration of the license, you will receive an alert about the license expiration.

Time	Software usage status	Alerts and renewals
Beyond the effective date	Cannot log into your account and cannot use the service.	The license you are using is invalid. Please use it only within the valid date.
Within 3 days before the expiration date	Can log into your account and continue using the service.	Your license will expire in <3 2 1 0> day(s). The service cannot be used after 7 days of the expiration date. Contact our support team via inquiry@vesoft.com to buy a new license or renewal your license.
Within 7 days after the expiration date	Can log into your account and continue using the service.	Your license has expired for <0 1 2 3 4 5 6 7> day(s). The service cannot be used after 7 days of the expiration date. Contact our support team via inquiry@vesoft.com to buy a new license or renewal your license.
After 7 days of the expiration date	Cannot log into your account and cannot use the service.	Your license has expired for more than 7 days and the service cannot be used. Contact our support team via inquiry@vesoft.com to buy a new license or renewal your license.

Last update: February 8, 2022

22.4 Ecosystem tools overview

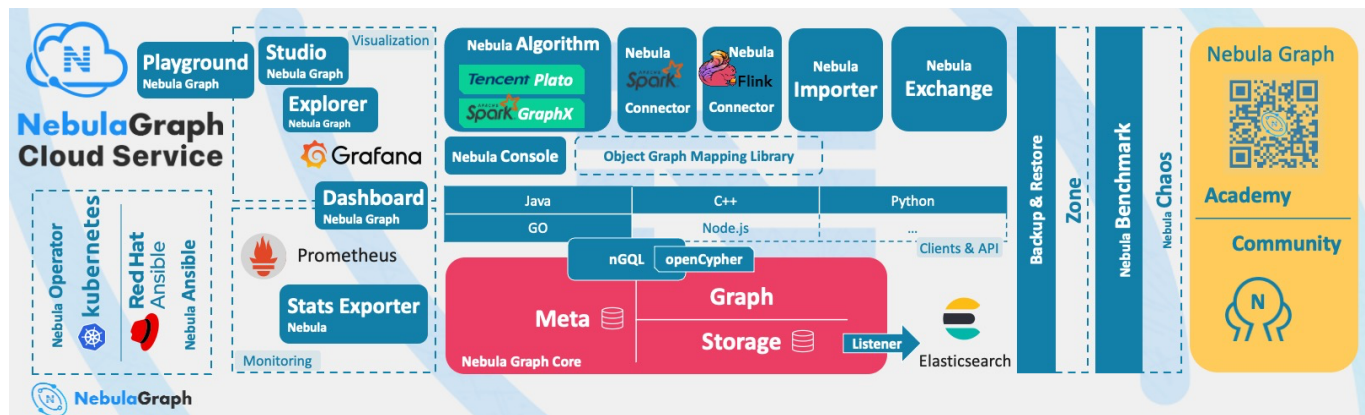

Compatibility

The core release number naming rule is `X.Y.Z`, which means Major version `X`, Medium version `Y`, and Minor version `Z`. The upgrade requirements for the client are:

- Upgrade the core from `X.Y.Z1` to `X.Y.Z2`: It means that the core is fully forward compatible and is usually used for bugfixes. It is recommended to upgrade the minor version of the core as soon as possible. At this time, the client can stay **not upgraded**.
- Upgrade the core from `X.Y1.*` to `X.Y2.*`: It means that there is some incompatibility of API, syntax, and return value. It is usually used to add functions, improve performance, and optimize code. The client needs to be upgraded to `X.Y2.*`.
- Upgrade the core from `X1.*.*` to `X2.*.*`: It means that there is a major incompatibility in storage formats, API, syntax, etc. You need to use tools to upgrade the core data. The client must be upgraded.
- The default core and client do not support downgrade: You cannot downgrade from `X.Y.Z2` to `X.Y.Z1`.
- The release cycle of a `Y` version is about 6 months, and its maintenance and support cycle is 6 months.
- The version released at the beginning of the year is usually named `X.0.0`, and in the middle of the year, it is named `X.5.0`.
- The file name contains `RC` to indicate an unofficial version (Release Candidate) that is only used for preview. Its maintenance period is only until the next RC or official version is released. Its client, data compatibility, etc. are not guaranteed.
- The files with `nightly`, `SNAPSHOT`, or `date` are the nightly versions. There is no quality assurance and maintenance period.

22.4.1 Nebula Graph Studio

Nebula Graph Studio (Studio for short) is a graph database visualization tool that can be accessed through the Web. It can be used with Nebula Graph DBMS to provide one-stop services such as composition, data import, writing nGQL queries, and graph exploration. For details, see [What is Nebula Graph Studio](#).

Note

The release of the Studio is independent of Nebula Graph core, and its naming method is also not the same as the core naming rules.

22.4.2 Nebula Dashboard Community Edition

Nebula Dashboard Community Edition (Dashboard for short) is a visualization tool for monitoring the status of machines and services in the Nebula Graph cluster. For details, see [What is Nebula Dashboard](#).

22.4.3 Nebula Dashboard Enterprise Edition

Nebula Dashboard Enterprise Edition (Dashboard for short) is a visualization tool that monitors and manages the status of machines and services in Nebula Graph cluster. For details, see [What is Nebula Dashboard](#).

22.4.4 Nebula Explorer

Nebula Explorer (Explorer for short) is a graph exploration visualization tool that can be accessed through the Web. It is used with the Nebula Graph core to visualize interaction with graph data. Users can quickly become map experts, even without experience in map data manipulation. For details, see [What is Nebula Explorer](#).

22.4.5 Nebula Exchange

Nebula Exchange (Exchange for short) is an Apache Spark application for batch migration of data in a cluster to Nebula Graph in a distributed environment. It can support the migration of batch data and streaming data in a variety of different formats. For details, see [What is Nebula Exchange](#).

22.4.6 Nebula Operator

Nebula Operator (Operator for short) is a tool to automate the deployment, operation, and maintenance of Nebula Graph clusters on Kubernetes. Building upon the excellent scalability mechanism of Kubernetes, Nebula Graph introduced its operation and maintenance knowledge into the Kubernetes system, which makes Nebula Graph a real cloud-native graph database. For more information, see [What is Nebula Operator](#).

22.4.7 Nebula Importer

Nebula Importer (Importer for short) is a CSV file import tool for Nebula Graph. The Importer can read the local CSV file, and then import the data into the Nebula Graph database. For details, see [What is Nebula Importer](#).

22.4.8 Nebula Spark Connector

Nebula Spark Connector is a Spark connector that provides the ability to read and write Nebula Graph data in the Spark standard format. Nebula Spark Connector consists of two parts, Reader and Writer. For details, see [What is Nebula Spark Connector](#).

22.4.9 Nebula Flink Connector

Nebula Flink Connector is a connector that helps Flink users quickly access Nebula Graph. It supports reading data from the Nebula Graph database or writing data read from other external data sources to the Nebula Graph database. For details, see [What is Nebula Flink Connector](#).

22.4.10 Nebula Algorithm

Nebula Algorithm (Algorithm for short) is a Spark application based on [GraphX](#), which uses a complete algorithm tool to analyze data in the Nebula Graph database by submitting a Spark task. To perform graph computing, use the algorithm under the lib repository through programming to perform graph computing for DataFrame. For details, see [What is Nebula Algorithm](#).

22.4.11 Nebula Plato

Nebula Plato is an application that integrates the open-source Plato Graph Computing Framework, with which Nebula Plato performs graph computations on Nebula Graph database data. For details, see [What is Nebula Plato](#).

22.4.12 Nebula Console

Nebula Console is the native CLI client of Nebula Graph. For how to use it, see [Connect Nebula Graph](#).

22.4.13 Nebula Docker Compose

Docker Compose can quickly deploy Nebula Graph clusters. For how to use it, please refer to [Docker Compose Deployment Nebula Graph](#).

22.4.14 Backup & Restore

[Backup&Restore](#) (BR for short) is a command line interface (CLI) tool that can help back up the graph space data of Nebula Graph, or restore it through a backup file data.

22.4.15 Nebula Bench

[Nebula Bench](#) is used to test the baseline performance data of Nebula Graph. It uses the standard data set of LDBC.

22.4.16 Monitoring

[Nebula-stats-exporter](#) exports stats to Prometheus.

22.4.17 API, SDK

Compatibility

Select the latest version of `x.y.*` which is the same as the core version.

Nebula Graph version	Language (commit id)
3.0.0	C++
3.0.0	Go
3.0.0	Python
3.0.0	Java
3.0.0	HTTP

22.4.18 Not Released

- [API](#)
- [Rust Client](#)
- [Node.js Client](#)
- [\[Object Graph Mapping Library \(OGM, or ORM\)\] Java, Python \(TODO: in design\)](#)
- [Test](#)
- [Chaos Test](#)


Last update: February 8, 2022

22.5 Import tools

There are many ways to write Nebula Graph 3.0.0:

- Import with **the command -f**: This method imports a small number of prepared nGQL files, which is suitable to prepare for a small amount of manual test data.
- Import with **Studio**: This method uses a browser to import multiple csv files of this machine. A single file cannot exceed 100 MB, and its format is limited.
- Import with **Importer**: This method imports multiple csv files on a single machine with unlimited size and flexible format.
- Import with **Exchange**: This method imports from various distribution sources, such as Neo4j, Hive, MySQL, etc., which requires a Spark cluster.
- Import with **Spark-connector/Flink-connector**: This method has corresponding components (Spark/Flink) and writes a small amount of code.
- Import with **C++/GO/Java/Python SDK**: This method imports in the way of writing programs, which requires certain programming and tuning skills.

The following figure shows the positions of these ways:

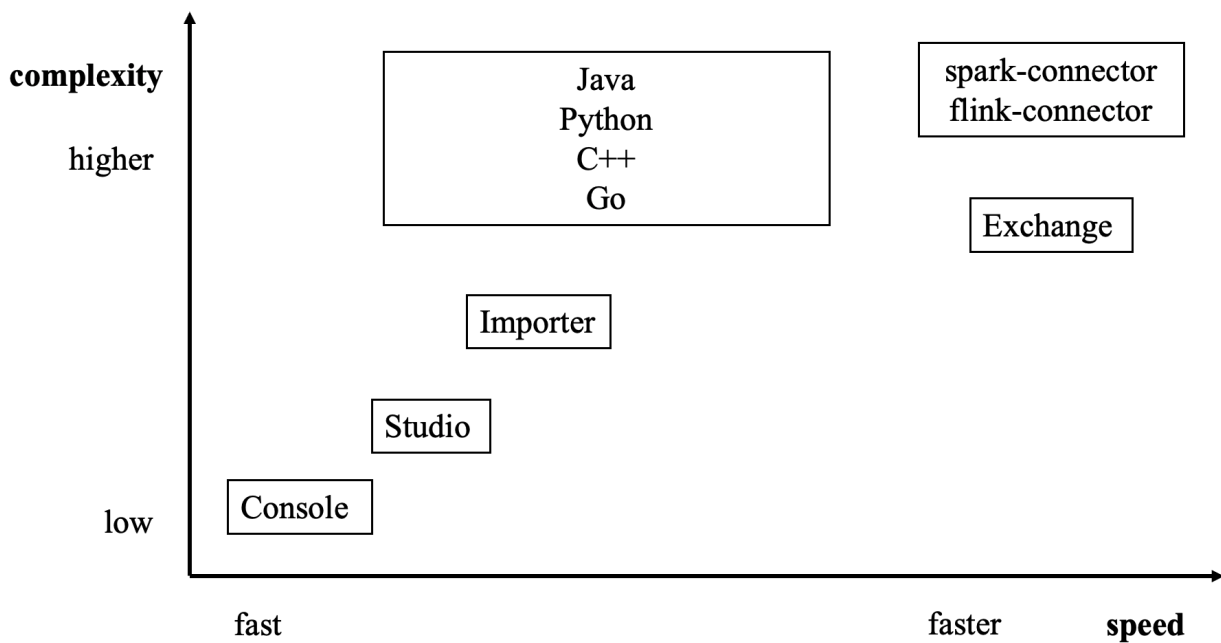

Last update: January 14, 2022

22.6 How to Contribute

22.6.1 Before you get started

Commit an issue on the github or forum

You are welcome to contribute any code or files to the project. But firstly we suggest you raise an issue on the [github](#) or the [forum](#) to start a discussion with the community. Check through the topic for Github.

Sign the Contributor License Agreement (CLA)

What is [CLA](#)?

Here is the [vesoft inc. Contributor License Agreement](#).

Click the **Sign in with GitHub to agree** button to sign the CLA.

If you have any questions, send an email to info@vesoft.com.

22.6.2 Modify a single document

This manual is written in the Markdown language. Click the [pencil](#) icon on the right of the document title to commit the modification.

This method applies to modify a single document only.

22.6.3 Batch modify or add files

This method applies to contribute codes, modify multiple documents in batches, or add new documents.

22.6.4 Step 1: Fork in the github.com

The Nebula Graph project has many [repositories](#). Take the [nebul](#) repository for example:

1. Visit <https://github.com/vesoft-inc/nebula>.
2. Click the [Fork](#) button to establish an online fork.

22.6.5 Step 2: Clone Fork to Local Storage

1. Define a local working directory.

```
# Define the working directory.
working_dir=$HOME/workspace
```

2. Set `user` to match the Github profile name.

```
user={the Github profile name}
```

3. Create your clone.

```
mkdir -p $working_dir
cd $working_dir
git clone https://github.com/$user/nebula.git
# or: git clone git@github.com:$user/nebula.git

cd $working_dir/nebula
git remote add upstream https://github.com/vesoft-inc/nebula.git
# or: git remote add upstream git@github.com:vesoft-inc/nebula.git

# Never push to upstream master since you do not have write access.
git remote set-url --push upstream no_push

# Confirm that the remote branch is valid.
```

```
# The correct format is:
# origin    git@github.com:$(user)/nebula.git (fetch)
# origin    git@github.com:$(user)/nebula.git (push)
# upstream  https://github.com/vesoft-inc/nebula (fetch)
# upstream  no_push (push)
git remote -v
```

4. (Optional) Define a pre-commit hook.

Please link the Nebula Graph pre-commit hook into the `.git` directory.

This hook checks the commits for formatting, building, doc generation, etc.

```
cd $working_dir/nebula/.git/hooks
ln -s $working_dir/nebulah/.linters/cpp/hooks/pre-commit.sh .
```

Sometimes, the pre-commit hook cannot be executed. You have to execute it manually.

```
cd $working_dir/nebula/.git/hooks
chmod +x pre-commit
```

22.6.6 Step 3: Branch

1. Get your local master up to date.

```
cd $working_dir/nebula
git fetch upstream
git checkout master
git rebase upstream/master
```

2. Checkout a new branch from master.

```
git checkout -b myfeature
```

Note

Because the PR often consists of several commits, which might be squashed while being merged into upstream. We strongly suggest you to open a separate topic branch to make your changes on. After merged, this topic branch can be just abandoned, thus you could synchronize your master branch with upstream easily with a rebase like above. Otherwise, if you commit your changes directly into master, you need to use a hard reset on the master branch. For example:

```
git fetch upstream
git checkout master
git reset --hard upstream/master
git push --force origin master
```

22.6.7 Step 4: Develop

- Code style

Nebula Graph adopts `cpplint` to make sure that the project conforms to Google's coding style guides. The checker will be implemented before the code is committed.

- Unit tests requirements

Please add unit tests for the new features or bug fixes.

- Build your code with unit tests enabled

For more information, see [Install Nebula Graph by compiling the source code](#).

Note

Make sure you have enabled the building of unit tests by setting `-DENABLE_TESTING=ON`.

- Run tests

In the root directory of `nebula`, run the following command:

```
cd nebula/build
ctest -j$(nproc)
```

22.6.8 Step 5: Bring Your Branch Update to Date

```
# While on your myfeature branch.
git fetch upstream
git rebase upstream/master
```

Users need to bring the head branch up to date after other contributors merge PR to the base branch.

22.6.9 Step 6: Commit

Commit your changes.

```
git commit -a
```

Users can use the command `--amend` to re-edit the previous code.

22.6.10 Step 7: Push

When ready to review or just to establish an offsite backup, push your branch to your fork on github.com:

```
git push origin myfeature
```

22.6.11 Step 8: Create a Pull Request

1. Visit your fork at [https://github.com/\\$user/nebula](https://github.com/$user/nebula) (replace `$user` here).
2. Click the `Compare & pull request` button next to your `myfeature` branch.

22.6.12 Step 9: Get a Code Review

Once your pull request has been created, it will be assigned to at least two reviewers. Those reviewers will do a thorough code review to make sure that the changes meet the repository's contributing guidelines and other quality standards.

22.6.13 Add test cases

For detailed methods, see [How to add test cases](#).

22.6.14 Donation

Step 1: Confirm the project donation

Contact the official Nebula Graph staff via email, WeChat, Slack, etc. to confirm the donation project. The project will be donated to the Nebula Contrib organization.

Email address: info@vesoft.com

WeChat: NebulaGraphbot

Slack: [Join Slack](#)

Step 2: Get the information of the project recipient

The Nebula Graph official staff will give the recipient ID of the Nebula Contrib project.

Step 3: Donate a project

The user transfers the project to the recipient of this donation, and the recipient transfers the project to the Nebula Contrib organization. After the donation, the user will continue to lead the development of community projects as a Maintainer.

For operations of transferring a repository on GitHub, see [Transferring a repository owned by your user account](#).

Last update: February 8, 2022



<https://docs.nebula-graph.io/3.0.0>